



Cooking	8-53
Cooking overview Pyrolytic single ovens Single ovens Compact ovens	8-23 28-29 30-33 34-36
Microwaves Warming drawers	37-38 39
Accessories	40-41
Coffee centres Technical diagrams	42-47 48-53
Hobs	54-103
Hobs overview inductionAir Plus hobs	54-69 72-73
flexInduction hobs	78-80
Induction hobs quickLite ceramic hobs	81-83 86-87
Technical diagrams Gas hobs	88-91 96-97
Technical diagrams	98-99
Domino hobs Technical diagrams	100-101 102
Hoods	104-135
Hoods overview	
Worktop ventilation	104-113 116-117
inductionAir Plus hobs Decorative hoods	118-119 120-121
Box chimney hoods	122-123
Integrated design hoods Telescopic hood	124-125 126
Integrated hood	127
Canopy hoods Technical diagrams	128-129 130-135
Cooling	136-209
Built-in	
Cooling overview	136-147
Fridge freezers – noFrost Fridge freezers – lowFrost	154-157 158-159
Single door fridges and freezers	160-165
Wine cabinets Technical diagrams	166-167 168-173
Freestanding	
Cooling overview Wine cabinet	174-187 192-193
Multi-door / American Style fridge freezer	194-197
Traditional American Style fridge freezer Fridge freezers	198-199 200-203
Upright single door fridges	204-205
Upright single door freezers Technical diagrams	206-207 208-209
Dishwashers	210-239
Built-in	
Dishwashers overview 60cm fully integrated dishwashers	210-219 222-224
45cm slimline dishwasher	225
Technical diagrams  Freestanding	226-227
Dishwashers overview	228-235
60cm dishwashers	238-239
Laundry appliances	240-271
<b>Built-in</b> Laundry overview	240-245
Washing machine	246
Washer dryers Technical diagrams	247 248-249
Freestanding	
Laundry overview Washing machines	250-263 266-267
Tumble dryers	268-269
Washer dryers	270-271



#### Award winning German Engineering.

Our design excellence has been richly rewarded in the past years with numerous iF Design Awards, German Design Awards and Red Dot Design Awards. Delivering a range of appliances equipped with smart technology, unparalleled user experience, and lasting, clear design aesthetics.









#### Driving innovation forward.

Siemens home appliances offer the perfect balance between modern design and innovative technology, all working together to create an intelligently connected kitchen and utility space in the home. These appliances deliver outstanding performance while offering consumers more flexibility and control over daily household tasks, as well as providing resource and time-saving solutions to help support increasingly busy lifestyles.



#### A rich heritage.

Siemens has pushed the boundaries of home innovation for more than a century. Today, our appliances not only set a new standard in applied technology, they redefine the way we run our households. Simplifying and re-defining our day-to-day, with inspiring and intuitive features and functionalities.

#### Our commitment.

We are committed to offering high-quality products through superior craftsmanship, innovative technologies, and attention to detail. We maintain strict quality control measures throughout the production process to ensure that our products meet rigorous

This dedication to quality is reflected in the performance, longevity, and overall customer satisfaction with Siemens appliances.

#### Handpicked materials.

Premium materials, like high quality glass and steel combine together to stir the senses with their colour and texture while remaining highly functional.

#### Intuitive user interfaces.

We strive to provide the most user-friendly experience by enabling smooth navigation and access to everything needed with a swipe of a finger thanks to clear and interactive interfaces.





# Exceptional care, as standard

#### Award-winning Customer Service

We empower our customers not only with the latest innovations but also through our dedicated customer service. That is why our products and service is rated 'excellent' on Trust Pilot.

- Get product advice on using our appliances or help with choosing a new
- Register a Siemens appliance and extend the warranty if available.
- Arrange a repair for a Siemens appliance by one of our Siemens engineers.\*
- Locate and buy replacement spare parts and accessories.





01450 2655

For opening hours, please visit our website.

Calls are charged at the basic rate, please check with the relevant telephone service provider for exact charges.

\*In some areas of the UK and Ireland we use selected and approved service partners to carry out repairs on our behalf where the repair price and process may vary.



Rated excellent 4.6 / 5 April 2025

#### Our warranties for added peace of mind

#### Why register?

- Quick access to customer service and support.
- Convenient access to your warranty certificate.
- Enjoy exclusive online offers when you opt-in.
- Stay on top of safety updates for your appliance.

\*Calls are handled by our warranty partner Domestic and General. National and

#### 2 year warranty.



Siemens offers a 2 year warranty as standard across our built-in and freestanding range for added peace of mind. This warranty covers manufacturing or material faults and defects during this warranty period.

Call to register your 2 year warranty\*



0800 519 2116



01 230 0344

#### 5 year warranty.



From time to time, Siemens may present additional warranties on either products or defined components of a product which are time limited offers. The Siemens 5 year warranty covers manufacturing and material faults.

\*Offer dates: 01.04.25 - 31.03.26. Online registration required.

To check if a product qualifies for an additional warranty, please contact us:

Call to register your 5 year warranty



0344 892 899



01450 2655

Or register online:

UK: www.siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: www.siemens-home.bsh-group.com/ie/customer-service/warranty

#### Or scan the QR codes:





#### Additional warranties on selected appliances.



#### 10 Year Compressor Drive Warranty

Available on selected Siemens fridges and freezers, this warranty covers defects in the compressor motor.



10 Year Anti-Rust Warranty for dishwashers Protects against rust in the inner cavity of the appliance during this warranty period. Applies to all Siemens dishwasher appliances only.

#### 10 Year iQdrive® Motor Warranty

Available on selected Siemens fridges and freezers, this warranty covers defects in the compressor motor.



#### Lifetime AquaStop Warranty

A lifetime warranty to protect against water damage caused by defective AquaStop system. Applies to selected Siemens laundry and dishwasher appliances only.

#### Repair service.



all employed and trained by Siemens. This gives them unrivalled knowledge and expertise in repairing our appliances. Each team member undergoes over 400 hours of training before attending customer call-outs, ensuring added peace of mind. It is easy to book, and manage an engineer visit online or via our call centre (see above for contact details).

If a Siemens appliance needs a repair, we are here to help with our team of over 340 locally based engineers across the UK,

Book or manage a repair online at:

UK: www.siemens-home.bsh-group.com/uk/customer-service/repair IE: www.siemens-home.bsh-group.com/ie/customer-service/repair

#### Online help.

#### Prefer to receive help online?

Siemens also offers a high quality comprehensive range of online services. Our online support offers help getting familiar with our appliances, find user manuals, browse FAQs, get useful tips and have full control over an engineer booking.

Visit our online customer service portal at:

UK: www.siemens-home.bsh-group.com/uk/customer-service/ IE: www.siemens-home.bsh-group.com/ie/customer-service/

## Online shop.

#### Accessories and cleaning products.

Well maintained appliances last longer, this is why we offer everything needed to look after any of our appliances on the Siemens online store. Our tested and approved cleaning and care products can be found there, along with other accessories ranging from a water filter for fridges, to a Teppan yaki grill plate for hobs.

Shop online at:

UK: www.siemens-home.bsh-group.com/uk/shop IE: www.siemens-home.bsh-group.com/ie/shop

#### Spare parts.


Siemens keeps a comprehensive range of replacement spare parts for up to 15 years\*. You can browse our exploded view diagrams on our store or speak to an advisor on the phone to help you locate and buy the spare parts you need.

Shop spare parts online at:

UK: www.siemens-home.bsh-group.com/uk/shop/search-parts IE: www.siemens-home.bsh-group.com/ie/shop/search-parts



\*As far as functionally relevant and storable for Siemens Home Appliances manufactured after 1st January 2023

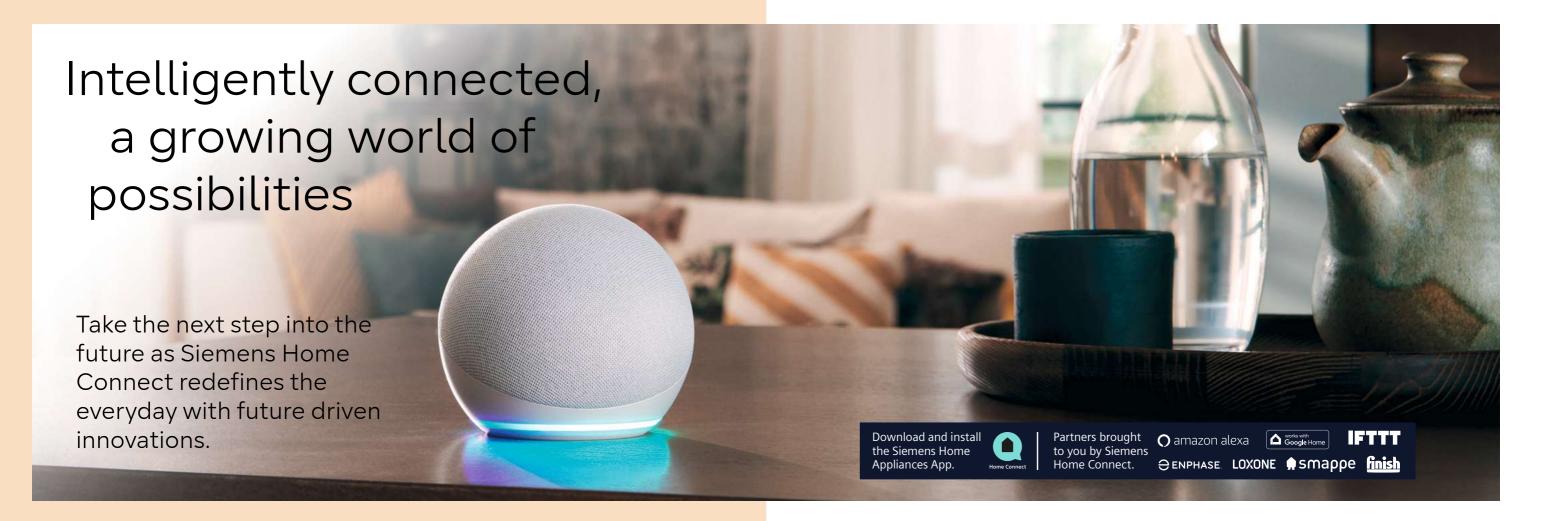

At Siemens, we don't believe kitchens are fully evolved. We use intelligent technology to constantly adapt and anticipate your changing needs, offering smart appliances integrated with cutting edge design.

Siemens appliances with Siemens Home Connect offer even more possibilities – from the everyday to the not so everyday.

#### Ovens

- Recipes: The Siemens Home Appliances App recipe section offers a large variety of dishes, with the ability to send settings directly to the oven from the app.
- Remote Control: Our smart ovens can be operated remotely from anywhere, such as preheating the oven on the way home to save time.
- Oven Assistant: Select from a broad range of dishes to automatically set the oven to the ideal temperature and cooking mode to get perfect results on the chosen dish.

#### Coffee Machines

- coffeeWorld: A wide range of additional coffee specialties from around the world are available exclusively from the app.
- coffeePlaylist: A playlist can be built by asking each guest to submit their own coffee preferences via the app and the whole beverage list can then be transferred remotely to the coffee machine. The drinks will be prepared one after the other.

#### Hobs and Hood

- Notifications: Helpful push notifications aid to stay on top of maintenance, such as knowing when to replace the grease filters.
- Hob Assistant: Packed full of dishes to make cooking on the hob simple as settings are sent directly to the hob to help achieve perfect results.
- Hob-Hood Control: Siemens hobs and hoods with Siemens Home Connect work together intelligently. The hood will switch on and adjust its settings automatically as needed based on the hobs output.

#### Fridge Freezers

- Remote Control: The Siemens Home Appliances App, makes controlling the temperature and settings simple. It also sends helpful push notifications, such as reminders when the door is
- Inventory: The app can help keep track of what is in the fridge easily, as well as suggests ideas for No Waste recipes to ensure ingredients get used up in time.

#### Dishwashers

- Remote Control: The washing cycle status can be started and checked remotely or push notifications sent, such as when the programme is complete or rinse aid needs topping up to make dishwashing fit any lifestyle.
- Programme Assistant: Simply select the type of dishes and cleaning preference on the app and Siemens Home Connect will suggest the best cycle for the load, to make dishwashing stress free and straight forward.

#### **Washing Machines and Tumble Dryers**

- intelligentDry: Load details can be automatically sent from the washing machine to the dryer to help it select the optimum drying programme. Once the drying programme has finished, it will ask for a rating to help inform the settings of future cycles.
- easyStart: A few simple questions about the load help the app recommend the ideal programme to use. Then all that is needed is to tap start.

Our world has turned into an ever-growing network of partner services, to help turn any house into a fully connected home.

### Reduce the effort of household tasks with Amazon Alexa and Google Home

With the Siemens Home Connect skills, voice control can be used for easy interaction with connected appliances at home. From simple dialogues to personalised interactions, managing the household is made even easier. With just a few simple commands, it is possible to start the laundry programme, preheat the oven, check the dishwasher progress or ask for a coffee to be made. A world of exciting possibilities await when using voice assistant with the Siemens Home Appliances App.

Stay stocked up on dishwasher tablets with Smart Finish
Smart Finish replenishment service automatically reorders Finish
dishwasher tablets when it detects stock is running low, to ensure
the next wash never has to be missed. The automatic service is
easy to set up from the Siemens Home Appliances App, to have
recommended dishwasher tablets delivered straight to the door.

#### Bring variety to food with Kitchen Stories

For those who love hosting and trying out new dishes, but simply lack ideas, Kitchen Stories is home to a large number of recipes. The integration with the Siemens Home Appliances App even enables the required settings to be sent directly to the appliance, at the touch of a button.



#### Try demo

For a better understanding of the features available on the Siemens Home Appliances App, download the app and use the demo function without registering appliances.

To experience the demo mode use the QR codes to download the free Siemens Home Appliances App, tap 'add appliances' on the home screen and choose from a range of demo appliances to experiment with.





# The perfect line up. Coordinated and intuitive cooking experiences

From ovens, to warming drawers, to coffee centres. Siemens clean lines and matching intelligent appliances allow for perfect design coordination.

#### Ovens

Siemens built-in ovens impress with their sleek finish and premium materials. They can be fitted alone or coordinated with other Siemens appliances for a design statement. Their ability to be installed independently allows full flexibility to fit appliances under work surfaces, in tall units or in a bank with other appliances. These multiple combinations give full freedom with the kitchen design, not to mention state-of-the art technology and intelligent features which save time when cooking.

#### Compacts

With the variety of appliances in our compact built-in range, Siemens provides a combination of options to suit preferences, while delivering complete visual perfection. Siemens 45cm and 38cm high compact appliances allow for a full array of cooking configurations. Depending on the range and model, compact ovens are available with steam or integrated microwave, offering space-saving design without compromising on style or utility.

#### Siemens cooking warranties:



#### 2 year warranty

A two year warranty is available on all Siemens ovens and compact appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.



To find out more about warranty and for registration, please visit: UK: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: siemens-home.bsh-group.com/ie/customer-service/warranty



#### Key features within the iQ700 and iQ500 range



#### fast preheat

No more tedious waiting for the oven to reach the right temperature.

The fast preheating feature activates multiple heating elements simultaneously to get to the desired temperature very quickly.



#### oolStart

Cooking certain frozen and chilled foods in the oven is now even faster – thanks to the innovative coolStart function. Without the need to wait for the oven to reach the set temperature, frozen and chilled foods can be successfully cooked without preheating, while still using the recommended cooking time.







#### Everything put in a good light.

Depending on the model, there are different kinds of illumination inside the oven. Whether it is the standard halogen light, LEDs or the most advanced multi-level LED strip, they all provide a brilliant view into the oven without having to open the door.






#### Electronic control

Depending on the function selected, the oven will suggest a suitable temperature which can be manually adjusted. The selected temperature is displayed digitally and a heating up indicator shows the progress towards the set temperature. The same indicator shows residual heat once the oven is turned off. Get quick access to performance features like cookControl Plus and cookControl Pro whilst being safe in the knowledge that if left unadjusted for a period of time, the oven will switch off automatically.



## Get more with Siemens Home Connect

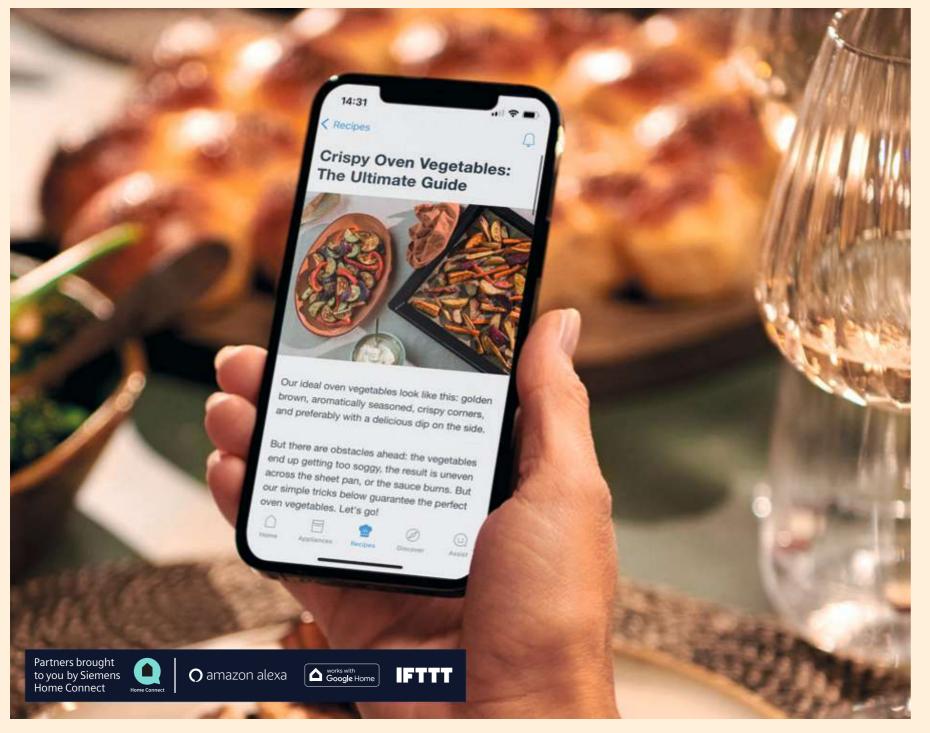



# Our range of smart cooking appliances with Siemens Home Appliances App are designed to work intelligently for the user.

From easy set-up, quick access to user manuals, scheduling pyrolytic cleaning start times to fit consumers' needs, to notifications to clean cooker hood filters; Siemens cooking appliances with Siemens Home Connect intelligently make everything easy and more accessible.

#### In safe hands.

Siemens cooking appliances are equipped with intelligent sensors to help get the best results when cooking. For example, the 'dishes' section on the app will suggest the best cooking settings for a chosen dish.

The vast choice of recipes in the recipe section of the Siemens Home Appliances App provide inspiration for budding or experienced home cooks alike. Once selected the cooking settings of the recipe can be transferred automatically to the oven intuitively from the app.

#### A growing world of partners.

The constantly growing network of partner solutions opens up completely new perspectives and networking possibilities. For an everyday life that is efficient and exciting like never before.

The Siemens Wi-Fi-enabled ovens connect to a wide range of smart devices and services. With partners including voice assistants, recipes, energy management, shopping and reordering – connecting appliances to the Siemens Home Appliances App brings a whole world of opportunities.

#### Intelligent thinking, intelligent design.

We enable multiple ways to control our appliances to help when hands are full or life becomes busy – voice, tablet, and smartphone. There are countless applications that can be precisely tailored to the user's needs. With the Siemens Home Appliances App and the relevant partner, the whole household can now be controlled with just one click. Everyone can create their own personal scenarios; for example by automating the switching off of various devices as they leave the home. An all-in-one solution for intelligent home automation.

#### Said Done

Appliances can be controlled without lifting a finger, by simply asking Amazon Alexa or Google Home to start the oven, or even asking how long it will take until dinner is ready. The oven can even be controlled easily by voice while relaxing on the sofa.

#### Joined up thinking

Depending on the model our smart ovens with roastingSensor know when the dish is done perfectly and switches itself off to avoid wasting energy unnecessarily. Complete control is at hand with Siemens Home Connect.

#### Enduring performance.

Downloadable programmes and software updates ensure the oven is always at the cutting edge of technology.

#### Knowledge at the touch of a button.

No need to search for the manuals hidden in the kitchen drawer, they can be accessed anytime easily with a simple tap via the Siemens Home Appliances App.



Models shown above: HM778GMB1B single oven, CT718L1B0 coffee machine, BI710C1B1B warming drawer, CM778GNB1B compact oven, BI710C1B1B warming drawer.

#### Display options available for iQ700 single ovens and compact ovens.

The iQ700 range oven menu comes with a high resolution TFT Touchdisplay in three different sizes. Each display type is designed to complement each other and coordinate effortlessly. The high-contrast colour screen offers smooth and intuitive navigation and gives access to all features by a simple touch. It is even easier to select the perfect settings with 'favourites' which can be accessed directly from the main menu.





#### **TFT Touchdisplay Pro**

Our largest high-contrast colour display is easy to read from any angle, allowing easy and comfortable operation of the oven.





#### **TFT Touchdisplay Plus**

A smaller display but still with the same colour, high-contrast display. The TFT Touchdisplay Plus is the intuitive and satisfying control centre of the oven.





#### TFT Touchdisplay

Our smallest display in the range but no less equipped to make the cooking experience effortless and help get the most from the oven. Thanks to activeClean®, ecoClean®, ecoClean® Plus and humidClean by Siemens, cleaning the oven becomes simple and effortless.



#### Ovens with activeClean®

Baked on food and grease can be removed at the push of a button without any need for chemical treatments. Hassle-free, the oven cleans itself thoroughly with activeClean®. It does so by heating up to a very high temperature – turning all residues into ash, which can easily be wiped away. This process is called pyrolysis and is an extremely convenient and efficient way to clean the whole interior of the oven saving time and effort.

For iQ700, the optional telescopic rails and full width enameled pan are specially designed to be used with activeClean® so they do not need to be removed during the cleaning process. Only the wire shelf needs to be removed.

activeClean® – ovens that clean thems



#### Ovens with ecoClean® and ecoClean® Plus

A special coating applied directly to the inside of the oven (please check specification of individual models), ecoClean® and ecoClean® Plus make cleaning the oven easy. The coated area cleans itself while the oven is on and models with back, roof and side coating benefit from a special cleaning programme.



#### humidClean

For faster cleaning, dirt is softened beforehand by vaporising soapy water. Simply add a drop of detergent to 400ml of water, pour the solution onto the centre of a completely cooled cooking compartment and set the cleaning programme. Once done the soiling can easily be removed with a dish cloth or soft brush.



#### Cleaning and de-scaling

Finished with a durable enameled interior, most Siemens compact45 combination ovens with steam feature dedicated cleaning and de-scaling programmes.



#### Drying programme

This programme can be used after each use to dry residual moisture inside the cavity of the oven.



## iQ700 ovens and compacts are designed to complement one another.

#### An option for every need.

The Siemens oven range offers a wide selection of options to choose from which can be combined in a bank or in a row. From single ovens with an easy clean solution such as activeClean, to an oven with steam function. They can be combined with an additional compact model such as coffee machine or oven with integral microwave.

#### Cooking with steam.

The Siemens compact steamer and steam combination ovens provide the benefit of steam together with perfect design coordination. Steam and added steam cooking has increased in popularity in the past few years. Not only does this offer healthier cooking options as steam retains vitamins and nutrients, but also maintains the visual appearance of many foods. With fullSteam Plus, healthy can also be convenient. Using the perfectly balanced combination of steam and heat at 120°C, dishes finish cooking up to 50% faster than using the standard 100°C steam function.

#### The coffee solution.

For coffee connoisseurs, adding a Siemens coffee centre to the design can be a great solution. This versatile machine will provide a variety of specialist coffees at the touch of a button.

#### Keep it warm.

The Siemens iQ700 range also includes warming drawers. Primarily designed to pre-heat crockery and keep cooked food warm, these drawers can also slow cook, prove dough and defrost

Available in 14cm or 29cm high options, they combine perfectly with single ovens and 45cm compact models in column or side by side in bank installations. For optimum design coordination, choose iQ700 models with matching TFT displays.







#### A built-in kitchen assistant.

#### auto cookControl Pro

#### cookControl Pro

Pre-installed, automated baking and roasting programmes in the oven guarantee ideal preparation. The chosen dish can be simply selected via the clearly arranged TFT Touchdisplay and the oven's sensors then control the process. The preferred result can be selected from various suggestions depending on time or preferences. The oven automatically applies the correct settings and functions then turns off when the dish is ready. More programmes can be downloaded by connecting the oven with a registered Siemens Home Appliance App account.

In addition to pre-installed programmes, cookControl Pro gives access to additional special sensors or heating modes depending on the appliance.



#### The same great results in up to half the time.

## varioSpeed

#### varioSpeed

When time is of the essence use the varioSpeed function to cut down cooking time by up to 50%.

Intuitive to use and a real "all-rounder" – add the microwave function to the chosen heating mode to enjoy delicious and refined dishes faster.

varioSpeed delivers outstanding results such as soft textures and crispy crusts all in record time.

#### Achieve the best results.




#### roastingSensor Plus

Thanks to three measuring points, the innovative roasting thermometer is able to precisely and reliably measure the core temperature of a wide range of foods. Ideal for meat, poultry and fish, it can even be combined with the integrated microwave and the pulseSteam function. The roastingSensor Plus removes the need to keep checking on food.



#### bakingSensor Plus

Thanks to bakingSensor Plus the oven can detect when the baking process is complete. Select the required dish and the innovative sensor technology fitted inside selected iQ700 ovens can automatically control the baking process for consistently delicious results. The bakingSensor constantly measures the humidity levels in the oven interior and is therefore able to determine when the dish is fully cooked and ready.





#### softMove

For effortless operation of the oven door, the dampers ensure gentle and quiet opening every time. Available on all iQ700 built-in ovens.







#### Cooking flexibility.



#### 4D hotAir

The innovative technology of the fan motor enables optimum heat distribution around the interior of the oven, as the oven is programmed to change the rotating direction of the fan every few minutes. Due to even distribution of heat within the cavity, cooking on up to 4 shelf levels is possible (for compact appliances up to 3 shelves). Food therefore always turns out perfectly, no matter which shelf it is placed on.



#### Steam cooking. The healthy way to cook.



#### fullSteam Plus

The steam function of the iQ700 oven is not only a healthier way of cooking, it is also faster. The perfectly balanced combination of steam and heat at 120°C finishes dishes up to 50% faster than using the standard 100°C steam function. Ideal to preserve vegetables' fresh colours and retain vitamins and minerals. Even firm vegetables like potatoes and carrots become perfectly tender, making fullSteam Plus one of the most convenient ways to prepare a delicious and healthy meal.



#### pulseSteam

Siemens ovens and compact appliances with pulseSteam are real all-rounders for more flexibility when cooking. Steam can easily be added while baking and roasting with hot air. Multi-function options offer the perfect cooking method for any food, preserving everything that is important: flavour, smell, texture and nutrients. Siemens combi-steam ovens do not just work with hot air but also with top and bottom heating and grilling, so bread, cakes and roasts come out just right: crisp on the outside and moist on the inside.

#### How does it work?

Siemens steam and steam combination ovens are quick and easy to install as they do not require plumbing-in. Our fullSteam ovens have the temperature range indicated; whereas our pulseSteam models have three intensity levels which can be adjusted, depending on what is being cooked.

The removable 1 litre water tank (1.3 litre for compact steamer) is accessed behind the semi-automatic control panel making it more convenient and easier to refill, even during cooking. Water is heated by a fast and efficient steam generator before being introduced into the oven. Thermostatic controls allow a pure steam temperature of  $30-100^{\circ}$ C.



Model shown: HS758G3B1B single oven

#### Rail Systems. The perfect accessories, designed especially for the iQ700 oven.

We supply accessories that help make cooking easier and more enjoyable. Great for tailoring the oven to individual needs offering ease of use and flexible cooking options to help create the perfect dish.



#### iQ700 telescopic rails

Fully extendable telescopic rails are available as an optional extra on selected iQ700 ovens. Designed to glide smoothly and effortlessly out of the oven, these rails offer clear and comfortable access to food during cooking and to remove the food once cooked without having to reach into the hot oven. Versions suited to pyrolytic models which can remain in the appliance during the cleaning cycle are also available, for effortless cleaning of the oven and the rails at the same time.





# Innovative speed solutions

## for outstanding cooking creations: iQ500

The iQ500 ovens combine state-of-the-art technology and efficient cooking methods to reduce cooking times without compromising on food quality.

Featuring more traditional, yet stylish, illuminated and easy to use control dials, the coordinated lightControl design allows the single ovens, compact microwave combination ovens, built-in microwave ovens, and warming drawers to be installed together, both vertically and horizontally\*.

Siemens offers a coordinating iQ500 45cm compact microwave combination oven, featuring the same striking blue and white lightControl display as the iQ500 single ovens.

The standard microwave combination oven CM585AGS1B features a large 36cm ceramic base to allow for use of rectangular dishes compared to a turntable.

Compact combination ovens are complemented by a 14cm high warming drawer to ensure complete iQ500 design coordination.

The iQ500 range also offers two design coordinated solo microwaves – a 25L version for installation in tall housing and a smaller 20L model design to fit into 30cm deep wall cupboards.

\*Horizontal combinations for single ovens and 45cm compact appliances only.



#### Guarantee the best cooking results.




#### cookControl

Providing automatic programmes for mainly meat, poultry and fish. Available with either 10 programmes or 30 programmes, simply select the desired dish and enter the food's weight – everything else is done automatically.



#### Single point roastingSensor

The roasting thermometer is able to precisely and reliably measure the internal temperature of dishes. By getting an accurate reading of the core temperature of boneless and fatless dishes, it can determine when they are perfectly done.





#### 3D hotAir

With the 3D hotAir, the oven distributes the heat consistently inside the oven cavity to guarantee perfect baking results while preventing flavours and smells intermingling even when cooking on three levels simultaneously.



#### coolSta

No more preheating when cooking chilled and frozen convenience food. Using an intelligent heating phase, it is now possible to cook frozen and chilled food without waiting for the oven to preheat.



#### fast preheat

By activating all heating elements simultaneously, Siemens ovens with fast preheating get to the desired temperature very quickly.





#### lightControl

The lightControl dial highlights the chosen heating symbol with a striking blue light – making operating the oven into an intuitive and exciting experience. The design is consistent throughout the iQ500 range with the intuitive illuminated lightControl dials.



# Explore compact ovens and microwaves

#### Ovens with integral microwave\*

When teamed with a single oven, Siemens iQ700 compact ovens with microwave offer a great alternative to a double oven when more space is needed for traditional cooking. Designed first and foremost to function as an oven, with construction, features and functions identical to a traditional single oven, these models benefit from the addition of microwaves at low medium power (max. 360W) to deliver oven-led combination cooking. Our varioSpeed faster cooking feature speeds up the cooking process while retaining traditional cooking results.

#### Microwave combination ovens\*

These iQ500 models are designed to provide more functionality than a solo microwave oven, focusing on combination cooking, with the microwave using higher power (max. 600W) to lead the cooking process, supported by hot air or grill functions to deliver speedy crisp and browned results. Based around a more traditional microwave functionality these models offer the perfect solution if regular microwave heating is the priority, but with the back-up of separate or combination hot air cooking and grill functionality if required.

\*These models are designed to operate best in combination mode, so when heating using microwave only, it may be necessary to adjust cooking times.

#### Compact ovens with steam

When looking for healthier cooking options the Siemens range of compact ovens with steam creates healthier meals using the power of steam to deliver juicier meats, crisped and fluffy baked items and vegetables that retain more of their vibrant colours, vitamins and nutrients. Siemens fullSteam models offer pure steam cooking, plus many models also offer pulseSteam – pulses of steam are injected into the oven to work in tandem with traditional cooking functions. Please check individual models for exact specifications.



**CM778GNB1B** compact oven with integral microwave



CM585AGS1B compact microwave combination oven

#### Inverter Technology

Inverter Technology delivers microwave power constantly while cooking – other, traditional microwaves are only able to deliver maximum power and manage the differing settings by alternating between on and off for specific time periods. This can result in uneven heating or over-cooked food and can be especially damaging to more delicate foods or smaller portions.

With Inverter technology, the microwave delivers power constantly, gradually managing the power levels down over time in order to control the food temperature. This gentle approach to cooking reduces uneven heating or overheated food and is especially beneficial for delicate foods. It may be necessary to adjust cooking times to ensure foods are thoroughly cooked before serving. Siemens recommends that the maximum power setting be used for heating liquids and the microwave is calibrated to provide a burst of high power initially, before managing the power down in stages to the next level over the first few minutes.



#### Warming and accessory drawers

Perfect for warming plates, a Siemens warming drawer will keep food warm for latecomers – as well as keeping plates at an optimum temperature to ensure hot food keeps its warmth when plated. With adjustable temperatures of 40-80°C, a four-setting iQ700 14cm or 29cm high warming drawer can be installed as a standalone appliance, or acts as the perfect accompaniment to Siemens iQ700 ovens and compacts. If needing additional storage only, a matching 14cm accessory drawer is also available. The iQ500 range includes a 14cm high warming drawer featuring 3 settings – minimum, medium and maximum – designed to coordinate with Siemens iQ500 ovens and compacts. The perfect line up of compact appliances with warming drawer is sure to bring style and elegance to any refined kitchen space.



BI710C1B1B iQ700 warming drawer

## iQ700 oven product overview

#### iQ700 single oven range

All single and compact ovens included on these pages feature softClose (excluding BF722L1B1B)



#### iQ700 drawers range

Display type	29cm Drawers	14cm Drawers	
	Warming drawer	Warming drawer	Accessory drawer
All drawers have: Push/pull opening Heated ceramic base (excludes Accessory Drawer)	BI710D1B1B • • 29cm height • Maximum capacity - plates 40 • Maximum capacity - espresso cups 192 • Temperature levels 4	BI710C1B1B • • 14cm height • Maximum capacity - plates 12 • Maximum capacity - espresso cups 64 • Temperature levels 4	BI710E1B1  • 14cm height  • Maximum capacity  - plates 14  • Maximum capacity - espresso cups 64  • Temperature levels n/a



All single ovens, compact ovens and coffee machine included on these pages feature Home Connect (excluding BF722L1B1B and CE732GXB1B)

Compact Ovens (45cm) with activeClean (pyrolytic/self-cleaning)	Compact Ovens (45cm) with ecoClean (non-pyrolytic) (excluding CM724G1B1B)		Compact Microwave		Coffee Centre
Microwave	Microwave	Steam	Microwave	Microwave with grill	
CM778GNB1B • Cooking functions: 21 4D hotAir cookControl Pro roastingSensor Plus bakingSensor Plus varioSpeed activeClean®					CT718L1B0 • • doubleCup • coffeeWorld • aromaSelect • ceramDrive • autoMilk Clean
CM776G1B1B • • Cooking functions: 19 • 4D hotAir • cookControl Pro • varioSpeed • activeClean®	CM736G1B1B • Cooking functions: 19 • 4D hotAir • cookControl Pro • varioSpeed • ecoClean	CS736G1B1 • Cooking functions: 21 4D hotAir cookControl Pro fullSteam Plus pulseSteam ecoClean			
	CM724G1B1B • • Cooking functions: 15 • 2D hotAir • cookControl Pro • varioSpeed ecoClean not included		CE732GXB1B  • cookControl 10  • 1000 Watts maximum  • Grill function	BF722L1B1B - cookControl 7 - 900 Watts maximum - Left hinged	



#### 2 year warranty

A two year warranty is available on all Siemens ovens and compact appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.

## iQ500 oven product overview


#### iQ500 single oven range



#### iQ500 microwave range

Display type	Compact microwaves		
	Microwave	Microwave	
TFT Touchdisplay	BF525LMB1B • Automatic programmes: 7	BF555LMB1B • Automatic programmes: 7	

#### iQ500 compact oven range

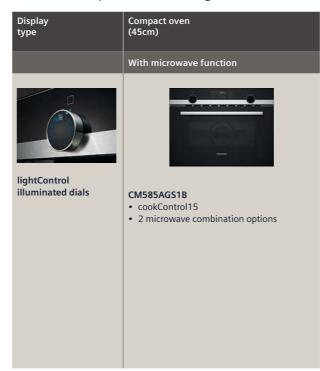

#### iQ500 drawer range

Display type	10cm Drawer
	Warming drawer
All drawers have: • Push/pull opening • Heated ceramic base	BI510CNR0B  • 14cm height  • Maximum capacity - plates 14  • Maximum capacity - espresso cups 64  • Temperature levels - 3

### 2 year warranty

#### 2 year warranty

A two year warranty is available on all Siemens ovens and compact appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.

## Pyrolytic single ovens





#### **1Q** 700 HM778GMB1B

Single multi-function oven with integral microwave Black with steel trim





Award Winning Ovens		6
	red <mark>dot</mark> winner	2022
All ovens on these pages		GE
have been accredited	●■■ DE	SIGN DE

#### Pyrolytic single ovens specifications

Appliance type	Single pyrolytic oven with microwave function
Design family	iQ 700
Model number	HM778GMB1B
Design characteristics	Large Display
TFT Touchdisplay Pro / TFT Touchdisplay Plus / TFT Touchdisplay	■1-1-
softMove door opening and closing	
Safety features	
Electronic control	
Digital temperature display with proposal	
Heating up indicator / Residual heat indicator	
Control panel lock / Automatic safety switch off	
Door lock	
Key features	
Home Connect	
Oven assistant with Voice control	
varioSpeed	
cookControl / cookControl Plus / cookControl Pro	
roastingSensor / roastingSensor Plus	
Oven shelf positions	5
Cleaning System	
activeClean® pyrolytic oven cleaning	
humidClean Plus	
Back / roof / side ecoClean® Direct liners	-1-1-
Cooking programmes	21
hotAir cooking (3D or 4D)	4D
Microwave (number of combination options)	5
coolStart / fast preheat	■/■
Full width surface grill / hotAir grilling / Centre surface grill	<b>■</b> /■/■
Pizza Setting / Bottom heat / Intensive heat	■/■/■
Conventional / Conventional gentle	■1■
Keep warm / Plate warming	<b>■</b> /■
Low temperature cooking / Dehydrate	■1■
fullSteam Plus / pulseSteam	-
Reheating / Defrost	-1-
AirFry with homeConnect app	
Performance / Technical information	
Product dimensions H x W x D (mm)	595 x 594 x 548
Cavity capacity (litres)	67
Water tank volume (litres)	-
Maximum microwave power (W) <sup>2</sup> / Number of power levels	800 / 5
Nominal voltage (volts)	220-240
Total connected loading (watts)	3600
Cable length (cm)	120
Minimum fuse protection	16A
Interior lights	_
Door glazing	Quadruple
Energy efficiency data	Q
Energy efficiency index (%)	
Energy efficiency class	
Energy consumption per cycle hotAir (kWh)¹	
Energy consumption per cycle notali (kWh) <sup>1</sup>	_
Time to cook standard load (mins)	
	1300
Largest baking sheet area (cm)	1290
Standard accessories	412
Full width enamelled pan / Wire shelves	1/2
Steam trays	-
Telescopic rails	Available as an accessory

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt).

<sup>2</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2025. Subject to modification without prior notice.



























-	

Appliance type	Single pyrolytic oven	Single pyrolytic oven with microwave function	Single pyrolytic oven with added steam function	Single pyrolytic oven	Single pyrolytic ove
Design family	fQ 700	iQ700	iQ 700	iQ 700	iQ 700
Model number	HB778G3B1B	HM776G1B1B	HR776G1B1B	HB776G1B1B	HB772G1B1B
Design characteristics	Large Display	Medium Display	Medium Display	Medium Display	Small Display
FT Touchdisplay Pro / TFT Touchdisplay Plus / TFT Touchdisplay	■   -   -	-/ <b>■</b> /-	-/ <b>■</b> /-	-/ <b>■</b> /-	-1-1 <b>■</b>
oftMove door opening and closing	= /- /- =	-/=/-		-/=/- <b>=</b>	-/-/ <b>-</b>
Safety features	_	_	-	_	_
Electronic control					
Digital temperature display with proposal	<u>-</u>	-	-	<u>-</u>	
Heating up indicator / Residual heat indicator		<u>-</u>			
Control panel lock / Automatic safety switch off		=/=			=/= =/=
Door lock			=/= =		=/-
			•		_
Key features Home Connect					_
	<u> </u>		-	<u>-</u>	<b>-</b>
Oven assistant with Voice control	<b>_</b>		-	•	<b>=</b>
varioSpeed					-
cookControl / cookControl Plus / cookControl Pro	-1-1	-1-1■	-1-1	-1-1-	-1=1-
roastingSensor / roastingSensor Plus	-1	-1-	-1-	-1-	-1-
Oven shelf positions	5	5	5	5	5
Cleaning system					
activeClean® pyrolytic oven cleaning			•		
humidClean Plus		•			•
Back / roof / side ecoClean® Direct liners	-1-1-	-1-1-	-1-1-	-1-1-	-1-1-
Cooking programmes	13	19	19	13	10
notAir cooking (3D or 4D)	4D	4D	4D	4D	3D
Microwave (number of combination options)	-	5	-	-	-
coolStart / fast preheat	■/■	■/■	■/■	■/■	■/■
Full width surface grill / hotAir grilling / Centre surface grill		■/■/■	■/■/■		
Pizza Setting / Bottom heat / Intensive heat	■ / ■ / -	■1■1-	■/■/-	■/■/-	■/■/-
Conventional / Conventional gentle	■/■	■/■	■/■	■/■	■/■
Keep warm / Plate warming	■/■	■/■	■/■	■/■	-1-
Low temperature cooking / Dehydrate	<b>■</b> / -	■1-	■/■	<b>■</b> / -	-1-
fullSteam Plus / pulseSteam	-1-	-1-	-1■	-1-	-1-
Reheating / Defrost	-1-	-1-	■1-	-1-	-1-
AirFry with homeConnect app					
Performance / Technical information					
Product dimensions H x W x D (mm)	595 x 594 x 548	595 x 594 x 548	595 x 594 x 548	595 x 594 x 548	595 x 594 x 548
Cavity capacity (litres)	71	67	71	71	71
Water tank volume (litres)	_	_	1	-	_
Maximum microwave power (W) <sup>2</sup> / Number of power levels	-	800 / 5	-	-	-
Nominal voltage (volts)	220-240	220-240	220-240	220-240	220-240
Fotal connected loading (watts)	3600	3600	3600	3600	3600
Cable length (cm)	120	120	120	120	120
Minimum fuse protection	16A	16A	16A	16A	16A
nterior lights		•	•	<b>I</b>	
Door glazing	Quadruple	Quadruple	Quadruple	Quadruple	Quadruple
Energy efficiency data	Quadrupic	Quadrupic	Quadrupic	Quadrupic	Quadrupic
energy efficiency index (%)	81.2	_	81.2	81.2	81.2
nergy efficiency class	A+		A+	A+	A+
nergy enriciency class nergy consumption per cycle hotAir (kWh) <sup>1</sup>	0.69	-	0.69	0.69	0.69
	0.87	-	0.87	0.87	0.89
energy consumption per cycle conventional (kWh) <sup>1</sup>		-			
Fime to cook standard load (mins)	42		42	42	42
argest baking sheet area (cm)	1290	1290	1290	1290	1290
Standard accessories					
full width enamelled pan / Wire shelves	1/2	1/2	1/2	1/2	1/2
Steam trays	-	-	-	-	-
Telescopic rails	Available as an accessory	Available as an accessory	Available as an accessory	Available as an accessory	Available as an access

<sup>■</sup> Yes, model has this feature. – Feature not available for this model.

with these prestigious design awards.

<sup>&</sup>lt;sup>1</sup>According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt).

<sup>&</sup>lt;sup>2</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2025. Subject to modification without prior notice.

## Single ovens







#### iQ 700 HS758G3B1B

Single multi-function oven with steam function Black with steel trim







#### Award Winning Ovens reddot winner 2022 All ovens on these pages have been accredited with these prestigious design awards.

#### Single ovens specifications

g	
Appliance type	Single oven with steam function
Design family	iQ 700
Model number	HS758G3B1B
Design characteristics	Large Display
TFT Touchdisplay Pro / TFT Touchdisplay Plus / TFT Touchdisplay	■1-1-
softMove door opening and closing	
Safety features	
Electronic control	
Digital temperature display with proposal	
Heating up indicator / Residual heat indicator	<b>I</b> /
Control panel lock / Automatic safety switch off	1
Door lock	
Key features	
Home Connect	
Oven assistant with Voice control	
varioSpeed	
cookControl / cookControl Plus / cookControl Pro	-1-1■
roastingSensor / roastingSensor Plus	-1 <b>□</b>
Oven shelf positions	
Cleaning system	
activeClean® pyrolytic oven cleaning	
humidClean Plus	
Back / roof / side ecoClean® Direct liners	<b>I</b> / <b>I</b> / <b>I</b>
Cooking programmes	22
hotAir cooking (3D or 4D)	
Microwave (number of combination options)	
coolStart / fast preheat	■/■
Full width surface grill / hotAir grilling / Centre surface grill	<b>I</b>   <b>I</b>
Pizza Setting / Bottom heat / Intensive heat	<b>I</b>
Conventional / Conventional gentle	■/■
Keep warm / Plate warming	■/■
Low temperature cooking / Dehydrate	I –
fullSteam Plus / pulseSteam	■/■
Steam Boost	•
Dough proving / Reheating / Defrost	<b>I</b>
AirFry with homeConnect app	
Performance / Technical information	
Product dimensions H x W x D (mm)	595 x 594 x 548
Cavity capacity (litres)	
Water tank volume (litres)	
Maximum microwave power (W) <sup>2</sup> / Number of power levels	
Nominal voltage (volts)	220-240
Total connected loading (watts)	3600
Cable length (cm)	120
Minimum fuse protection	16A
Interior lights	
Door glazing	Triple
Energy efficiency data	
Energy efficiency index (%)	81.2
Energy efficiency class	
Energy consumption per cycle hotAir (kWh) <sup>1</sup>	0.69
Energy consumption per cycle conventional (kWh) <sup>1</sup>	0.87
Time to cook standard load (mins)	
Largest baking sheet area (cm)	1290
Standard accessories	
Full width enamelled pan / Wire shelves	
Steam trays	Available as an assessant
Telescopic rails	Available as an accessory

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt). For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will

Data valid in this table as of April 2025. Subject to modification without prior notice.



















#### Single ovens specifications

Single overis specifications			
Appliance type	Single oven with steam function	Single oven	Single oven
Design family	iQ 700	iQ700	iQ 700
Model number	HS736G1B1B	HB736G1B1B	HB732G1B1B
Design characteristics	Medium Display	Medium Display	Small Display
TFT Touchdisplay Pro / TFT Touchdisplay Plus / TFT Touchdisplay	- / <b>■</b> / -	-/■/-	-/-/ <b>■</b>
softMove door opening and closing	-/=/-		
Safety features		-	
Electronic control	•		
Digital temperature display with proposal	<u>-</u>	-	<u>-</u>
		- -	
Heating up indicator / Residual heat indicator	·		· · · · · · · · · · · · · · · · · · ·
Control panel lock / Automatic safety switch off	■/■ 	<b>=</b> / <b>=</b>	■/■ -
Door lock			
Key features	_	_	_
Home Connect	•		
Oven assistant with Voice control	•	•	<b>I</b>
varioSpeed		-	
cookControl / cookControl Plus / cookControl Pro	-1-1■	-1■1-	-1■1-
roastingSensor / roastingSensor Plus	-1-	-1-	-1-
Oven shelf positions	5	5	5
Cleaning system			
activeClean® pyrolytic oven cleaning	_	_	-
humidClean Plus	•		
Back / roof / side ecoClean® Direct liners	■1-1-	■1-1-	■ / - / -
Cooking programmes	21	13	10
hotAir cooking (3D or 4D)	4D	4D	3D
Microwave (number of combination options)	_	_	-
coolStart / fast preheat	■/■	■/■	■/■
Full width surface grill / hotAir grilling / Centre surface grill	■/■/■	■/■/■	
Pizza Setting / Bottom heat / Intensive heat	■/■/-	■/■/-	■/■/-
Conventional / Conventional gentle	■/■	■/■	■/■
Keep warm / Plate warming		= · =	
Low temperature cooking / Dehydrate	<b>■</b> /-	<u> </u>	_
fullSteam Plus / pulseSteam		-1-	
Steam Boost		_	
Dough proving / Reheating / Defrost		-1-1-	-1-1-
AirFry with homeConnect app	=/=/=	=	
		_	
Performance / Technical information Product dimensions H x W x D (mm)	595 x 594 x 548	595 x 594 x 548	595 x 594 x 548
Cavity capacity (litres)	71	71	71
Water tank volume (litres)	1	-	
Maximum microwave power (W) <sup>2</sup> / Number of power levels	-1-	-1-	-1-
Nominal voltage (volts)	220-240	220-240	220-240
Total connected loading (watts)	3600	3600	3600
Cable length (cm)	120	120	120
Minimum fuse protection	16A	16A	16A
Interior lights			
Door glazing	Triple	Triple	Triple
Energy efficiency data			
Energy efficiency index (%)	81.2	81.2	81.2
Energy efficiency class	A+	A+	A+
Energy consumption per cycle hotAir (kWh) <sup>1</sup>	0.69	0.69	0.69
Energy consumption per cycle conventional (kWh) <sup>1</sup>	0.87	0.87	0.87
Time to cook standard load (mins)	41	44	44
Largest baking sheet area (cm)	1290	1290	1290
Standard accessories			
Full width enamelled pan / Wire shelves	1/2	1/2	1/2
ruii wiutii eriairielleu pari / wire srielves			
Steam trays	3	_	_

<sup>■</sup> Yes, model has this feature. – Feature not available for this model.

Data valid in this table as of April 2025. Subject to modification without prior notice.

<sup>According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt).
For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will</sup> 

## Single ovens






#### iQ 500 HB578GBS7B

#### Single pyrolytic oven Black with steel trim







#### Single ovens specifications

Appliance type	Single pyrolytic oven
Design family	iQ 500
Model number	HB578GBS7B
Design characteristics	
TFT Touchdisplay with ClearText	-
Interior lights	1 x 25W Halogen
lightControl illuminated dials	_
Control wheel	_
softClosing door opening and closing	■/■
Safety features	
Electronic control	
Digital temperature display with proposal	-
Heating up indicator/ Residual heat indicator	■/■
Control panel lock / Automatic safety switch off	■/■
Door lock	
Key features	
Home Connect	
Oven assistant with Voice control	-
roastingSensor Plus	-
bakingSensor Plus	-
cookControl / cookControl Plus / cookControl pro	■1-1-
Oven shelf positions	5
Cleaning functions	
activeClean® pyrolytic oven cleaning	
Back / roof / side ecoClean® Direct liners	-1-1-
ecoClean® setting	-
Cooking programmes	9
hotAir cooking with hotAir gentle	3D
Microwave (number of combination options)	-
coolStart / fast preheat	<b>■</b> /■
Full width surface grill / hotAir grilling / Centre surface grill	
Pizza Setting / Bottom heat / Intensive heat	
Conventional / Conventional gentle	/
Keep warm / Plate warming	-1-
Low temperature cooking / Dehydrate	-1-
fullSteam / pulseSteam	-1-
addedSteam	-
AirFry with homeConnect app	
Dough proving / Reheating / Defrost	-1-1-
Performance / Technical information	
Product dimensions H x W x D (mm)	595 x 594 x 548
Water tank capacity with empty indicator (litres)	-
Nominal voltage (volts)	220-240
Total connected loading (watts)	3600
Cable length (cm)	120
Minimum fuse protection	16A
Door glazing	Quadruple
Energy efficiency data <sup>1</sup>	
Energy efficiency index	81.2
Energy efficiency class	A+
Energy consumption per cycle hotAir (kWh)	0.69
Energy consumption per cycle conventional (kWh)	0.94
Oven capacity (litres)	71
Time to cook standard load (mins)	47
Largest baking sheet area (cm)	1290
Standard accessories	
Full width enamelled pan / Wire shelves	1/2
Telescopic rails	Available as an accessory
Yes, model has this feature. – Feature not available for this m	

■ Yes, model has this feature. – Feature not available for this model.

\*\* Yes, moder has this feature. - Feature not available for this model.
\*\* According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt).
\*\* For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

Data valid in this table as of April 2025. Subject to modification without prior notice.





#### Single ovens specifications

Appliance type	Single oven
Design family	iQ 500
Model number	HB537GBS3B
TFT Touchdisplay with ClearText	
TFT Touchdisplay with ClearText	-
Interior lights	1 x 25W Halogen
lightControl illuminated dials	
Control wheel	
softClosing door opening and closing	■/-
Safety features	
Electronic control	•
Digital temperature display with proposal	
Heating up indicator/ Residual heat indicator	<b>I</b> / <b>I</b>
Control panel lock / Automatic safety switch off	■/■
Door lock	
Key features	_
Home Connect	-
Oven assistant with Voice control	_
roastingSensor Plus	
bakingSensor Plus	<del>-</del>
cookControl / cookControl Plus / cookControl pro	<u>-</u> ■1-1-
Oven shelf positions	■1-1- 5
•	3
Cleaning functions	
activeClean® pyrolytic oven cleaning Back / roof / side ecoClean® Direct liners	- ■1-1-
	■1-1-
ecoClean® setting	_
Cooking programmes	7
hotAir cooking with hotAir gentle	3D
Microwave (number of combination options)	
coolStart / fast preheat	<b>I</b> / <b>I</b>
Full width surface grill / hotAir grilling / Centre surface grill	■/■/■
Pizza Setting / Bottom heat / Intensive heat	■/■/-
Conventional / Conventional gentle	■/■
Keep warm / Plate warming	-1-
Low temperature cooking / Dehydrate	-1-
fullSteam / pulseSteam	-1-
addedSteam	-
AirFry with homeConnect app	-
Dough proving / Reheating / Defrost	-1-1-
Performance / Technical information	
Product dimensions H x W x D (mm)	595 x 594 x 548
Water tank capacity with empty indicator (litres)	-
Nominal voltage (volts)	220-240
Total connected loading (watts)	3600
Cable length (cm)	120
Minimum fuse protection	16A
Door glazing	Triple
Energy efficiency data <sup>1</sup>	
Energy efficiency index	81.2
Energy efficiency class	A+
Energy consumption per cycle hotAir (kWh)	0.69
	0.94
33	0.5.
Energy consumption per cycle conventional (kWh)	71
Energy consumption per cycle conventional (kWh)  Oven capacity (litres)	71 47
Energy consumption per cycle conventional (kWh)  Oven capacity (litres)  Time to cook standard load (mins)	47
Energy consumption per cycle conventional (kWh)  Oven capacity (litres)  Time to cook standard load (mins)  Largest baking sheet area (cm)	
Energy consumption per cycle conventional (kWh)  Oven capacity (litres)  Time to cook standard load (mins)	47

Data valid in this table as of April 2025. Subject to modification without prior notice.

<sup>&</sup>lt;sup>1</sup> According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt).
<sup>2</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

## Compact ovens





#### **1Q** 700 CM778GNB1B

Compact pyrolytic oven with integral microwave Black with steel trim







#### **Award Winning** Compact Ovens reddot winner 2022 All compact ovens on these pages have been accredited with these prestigious

#### Compact ovens specifications

Appliance type	Compact pyrolytic oven with microwave function
Design family	iQ 700
Model number	CM778GNB1B
Design characteristics	Large Display
TFT Touchdisplay Pro / TFT Touchdisplay Plus / TFT Touchdisplay	■1-1-
softMove door opening and closing	
Safety features	
Electronic control	
Heating up indicator / Residual heat indicator	-1■
Control panel lock / Automatic safety switch off	■/■
Door lock	
Key features	
Home Connect	
Oven assistant with Voice control	
varioSpeed	
cookControl / cookControl Plus / cookControl Pro	-1-1
roastingSensor / roastingSensor Plus	-1 <b>□</b>
bakingSensor Plus	-
Oven shelf positions	3
Cleaning system	
activeClean® pyrolytic oven cleaning	
humidClean Plus	
Back / roof / side ecoClean® Direct liners	-1-1-
Drying programme	
ecoClean setting	
Cleaning and Descaling programme	-
Cooking programmes	21
	4D
hotAir cooking (3D or 4D)	40 •
Microwave (combination)	
coolStart / fast preheat	
Full width surface grill / hotAir grilling / Centre surface grill	
Pizza Setting / Bottom heat / Intensive heat	
Conventional / Conventional gentle	■/■ 
Keep warm / Plate warming	
Low temperature cooking / Dehydrate	■/■
fullSteam Plus / pulseSteam	-1-
Steam Boost	
AirFry with homeConnect app	
Performance / Technical information	
Product dimensions H x W x D (mm)	455 x 594 x 548
Cavity capacity (litres)	45
Water tank volume (litres)	-
Nominal voltage (volts)	220-240
Total connected loading (watts)	3600
Maximum microwave power (W) <sup>2</sup> / Number of power levels	900 / 5
Cable length (cm)	150
Minimum fuse protection	16A
Interior lights	•
Door glazing	•
Energy efficiency data	
Energy efficiency index (%)	-
Energy efficiency class	-
Energy consumption per cycle hotAir (kWh) <sup>1</sup>	-
Energy consumption per cycle conventional (kWh) <sup>1</sup>	-
Largest baking sheet area (cm)	1290
Standard accessories	
Full width enamelled pan / Wire shelves	1/2
Steam trays	-
Telescopic rails	-

#### ■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt). For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will

Data valid in this table as of April 2025. Subject to modification without prior notice.





















#### Compact ovens specifications

State   Control Cont	Compact ovens specifications				
Carlog Feelings   Carlog   C	Appliance type				
Model number	Design family				
Medium Display   Medi	3 7				
Till South South Post   Till South South Post   Till South South Post   Till South South Post   Till					
	-				
Safety Seators Sections: Control of Section Control Section Control Section Control Section Control Section Control Section Control Section Se					
			-	•	
Nesting up indicated F seriodical heat indicator		<u> </u>	_	-	-
		<del>_</del>			
					· -
Non-assistant with Visic control					
			_	_	_
			-	-	-
		<del>_</del>		<del>-</del>	
			<del>-</del>		
-1 -	-		_	-	
Death of the politicists   Death of the politi		- · · <del>-</del>			
Owen shelf positions		-1-	-1-	-	-1-
Cleaning system	3		-		_
		3	3	3	3
			_		
			<b>-</b>		
Dyring programme			-		
Cleaning and Descaling programme					
Claning and Descaling programme					_
1					
Motivar cooking (3D or 4D)					
Microwave (combination)					
Full width surface grill / hotAir grilling / Centre surface grill			_		
Pizza Setting   Bottom heat / Intensive heat				· · · · · · · · · · · · · · · · · · ·	
Conventional / Conventional gentle         I I I I I I I I I I I I I I I I I I I			-/-/-		
		=	=	1 1	
Low temperature cooking / Dehydrate	-	· · · · · · · · · · · · · · · · · · ·		· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·
	<u> </u>			· · · · · · · · · · · · · · · · · · ·	· ·
		· · · · · · · · · · · · · · · · · · ·	■1-	· · · · · · · · · · · · · · · · · · ·	
			-1-		
Performance / Technical information         Product dimensions H x W x D (mm)         455 x 594 x 548         45 x 504 x 504         200 x		•	-	-	-
Product dimensions H x W x D (mm)         455 x 594 x 548           Cavity capacity (litres)         47         45         45         45           Water tank volume (litres)         1         -         -         -           Nominal voltage (volts)         220-240         200-240         200-240         200-240         200-240         200-240         200-240 <td< td=""><td></td><td></td><td></td><td></td><td></td></td<>					
Cavity capacity (litres)     47     45     45     45       Water tank volume (litres)     1     -     -     -       Nominal voltage (volts)     220-240     220-240     220-240     220-240       Total connected loading (watts)     3300     3600     3600     3600       Maximum microwave power (W)² / Number of power levels     -     900 / 5     900 / 5     900 / 5       Cable length (cm)     150     150     150     150       Minimum fuse protection     16A     16A     16A     16A     16A       Interior lights					
Water tank volume (litres)         1         -         -         -           Nominal voltage (volts)         220-240         220-240         220-240         220-240           Total connected loading (watts)         3300         3600         3600         3600           Maximum microwave power (W)² / Number of power levels         -         900 / 5         900 / 5         900 / 5           Cable length (cm)         150         150         150         150         150           Minimum fuse protection         16A         16A <td></td> <td></td> <td></td> <td>1</td> <td></td>				1	
Nominal voltage (volts)  220-240  3600  400 150  16A  16A  16A  16A  16A  16A  16A  16A					-
Total connected loading (watts)   3300   3600   3					
Maximum microwave power (W)³ / Number of power levels         -         900 / 5         900 / 5         900 / 5           Cable length (cm)         150         150         150         150           Minimum fuse protection         16A         16A         16A         16A           Interior lights         ■         ■         ■         ■           Door glazing         ■         ■         ■         ■           Energy efficiency data           Energy efficiency class         -         -         -         -         -           Energy consumption per cycle hotAir (kWh)¹         0.73         -         -         -         -           Energy consumption per cycle conventional (kWh)¹         - <t< td=""><td>-</td><td></td><td></td><td></td><td></td></t<>	-				
Cable length (cm)     150     150     150       Minimum fuse protection     16A     16A     16A       Interior lights     ■     ■     ■       Door glazing     ■     ■     ■       Energy efficiency data       Energy efficiency index (%)     -     -     -       Energy efficiency class     -     -     -       Energy consumption per cycle hotAir (kWh)¹     0.73     -     -     -       Energy consumption per cycle conventional (kWh)¹     -     -     -     -       Largest baking sheet area (cm)     1290     1290     1290     1290       Steandard accessories       Full width enamelled pan / Wire shelves     1/1     1/1     1/1     1/1     1/1       Steam trays     3     -     -     -     -	Total connected loading (watts)	3300	3600	3600	3600
Minimum fuse protection 16A	Maximum microwave power (W) <sup>2</sup> / Number of power levels	_	900 / 5	900 / 5	900 / 5
Interior lights	Cable length (cm)	150	150	150	150
Door glazing ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■ ■	Minimum fuse protection	16A	16A	16A	16A
Energy efficiency data           Energy efficiency (%)         –         –         –         –         –           Energy efficiency class         – </td <td>Interior lights</td> <td></td> <td></td> <td></td> <td></td>	Interior lights				
Energy efficiency index (%)         –         –         –         –           Energy efficiency class         –         –         –         –           Energy consumption per cycle hotAir (kWh)¹         0.73         –         –         –         –           Energy consumption per cycle conventional (kWh)¹         –         –         –         –         –           Largest baking sheet area (cm)         1290         1290         1290         1290         1290           Steandard accessories         Full width enamelled pan / Wire shelves         1/1         1/2<	Door glazing				
Energy efficiency class         -	Energy efficiency data				
Energy consumption per cycle hotAir (kWh)¹         0.73         -         -         -           Energy consumption per cycle conventional (kWh)¹         -         -         -         -           Largest baking sheet area (cm)         1290         1290         1290         1290           Standard accessories           Full width enamelled pan / Wire shelves         1/1         1/1         1/1         1/1         1/1           Steam trays         3         -         -         -         -	Energy efficiency index (%)		-	-	-
Energy consumption per cycle conventional (kWh)¹         -         -         -         -         -         -         Largest baking sheet area (cm)         1290         1290         1290         1290         1290         1290         1290         Standard accessories         1/1 <td>Energy efficiency class</td> <td></td> <td>_</td> <td>-</td> <td>-</td>	Energy efficiency class		_	-	-
Largest baking sheet area (cm)     1290     1290     1290     1290       Standard accessories       Full width enamelled pan / Wire shelves     1 / 1     1 / 1     1 / 1     1 / 1     1 / 1       Steam trays     3     -     -     -     -	Energy consumption per cycle hotAir (kWh) <sup>1</sup>	0.73	-	-	-
Largest baking sheet area (cm)     1290     1290     1290       Standard accessories       Full width enamelled pan / Wire shelves     1 / 1     1 / 1     1 / 1     1 / 1       Steam trays     3     -     -     -	Energy consumption per cycle conventional (kWh) <sup>1</sup>	-	-	-	-
Full width enamelled pan / Wire shelves         1 / 1         1 / 1         1 / 1         1 / 1         1 / 1         1 / 1         1 / 1         1 / 1         1 / 1         1 / 1         1 / 1         2 / 2         - <td< td=""><td></td><td>1290</td><td>1290</td><td>1290</td><td>1290</td></td<>		1290	1290	1290	1290
Steam trays         3         -         -         -	Standard accessories				·
·		1/1	1/1	1/1	1/1
·	Steam trays	3	_	_	_
	-		_	_	_

<sup>■</sup> Yes, model has this feature. – Feature not available for this model.

Data valid in this table as of April 2025. Subject to modification without prior notice.

design awards.

<sup>&</sup>lt;sup>1</sup>According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt). <sup>2</sup>For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will

## Microwaves

## •....•

#### iQ 500 CM585AGS1B

### Compact oven with microwave function Black with steel trim







#### Compact ovens specifications

eompact overis specifications	
Appliance type	Compact oven with
	microwave function
Design family	iQ 500
Model number	CM585AGS1B
Design characteristics	
TFT Touchdisplay with ClearText	
LCD white display	
LightControl Intutive operation Illuminated dial	
Control wheel	
Soft Open / Soft Close drop down door	□1-
Safety features	
Electronic control	
Digital temperature display with proposal	
Heating up indicator / Residual heat indicator	
Control panel lock / Automatic safety switch off	■/■
Door lock	
Key features	
Home Connect	
Oven assistant with Voice control	
varioSpeed	
cookControl / cookControl Plus / cookControl Pro	cookControl 15
roastingSensor/ roastingSensor Plus	
bakingSensor Plus	
Oven shelf positions	
Cleaning system	
activeClean pyrolytic oven cleaning	
HumidClean Plus	
Back / roof / side ecoClean® Direct liners	
Hydrolyse manual	-
ecoClean setting	
descaling programme/ cavity drying function	- 15
Cooking programmes	
hotAir cooking (3D or 4D)	Standard
microwave (number of combination options)	2
CoolStart / fast preheat	1/-
Full width surface grill / hotAir grilling / Centre surface grill	11.11
Conventional / Conventional gentle	-/-
Keep warm / Plate warming	1
Low temperature cooking/ Dehydrate	
fullSteam / pulseSteam	
addedSteam	
AirFry with homeConnect app	
Dough proving /reheating/defrost	
Performance / Technical information	
Product dimensions H x W x D (mm)	454 x 594 x 570
Cavity dimensions H x W x D (mm)	220 x 420 x 420
Cavity capacity (litres)	44
Maximum microwave power (W) <sup>2</sup> / Number of power levels	900 / 4
Nominal voltage (volts)	220-240
Total connected loading (watts)	3350
Cable length (cm)	150
Minimum fuse protection	16A
Interior lights	
Door glazing	Double
Energy efficiency data <sup>1</sup>	
Energy efficiency index	
Energy efficiency class	
Energy consumption per cycle hotAir (kWh)	
Energy consumption per cycle conventional (kWh)	
Time to cook standard load (mins)	
Largest baking sheet area (cm)	1290
Standard accessories	
Full width enamelled pan / Wire shelves	
Turntable (Glass)	
Telescopic rails	

#### ■ Yes, model has this feature. – Feature not available for this model.

 $\textbf{Data valid in this table as of April 2025.} \ \textbf{Subject to modification without prior notice}.$ 

#### iQ 700 CE732GXB1B

#### Microwave oven with grill Black with steel trim





#### Microwave specifications

Cable length cm

Minimum fuse protection

Glass pan / Insert grid



Appliance type	Microwave oven with grill	Microwave
Design family	iQ 700	iQ 700
Model number	CE732GXB1B	BF722L1B1B
Design characteristics		
TFT Touchdisplay Pro	-	-
TFT Touchdisplay Plus	-	-
TFT Touchdisplay		
Side opening door (left hinged)	-	•
Control panel position	Top, horizontal	Bottom, horizontal
Controls		
Electronic control		•
Automatic programmes	_	
Safety switch off	-	-
Key features		
Home Connect	-	-
Oven assistant with Voice control	-	-
Installation in wall unit / tall housing	1	■/■
Electronic clock	-	-
ClearText Display	-	-
Full glass inner door	-	-
Glazed door (Quadruple/Triple/Double)	Double	Double
Maximum cooking time duration (mins)	90	90
Stainless steel interior		
Microwave		
Quartz grill	-	-
Microwave / grill combination		-
cookControl / cookControl Plus / cookControl Pro	<b>■</b> 1-1-	■1-1-
Performance / Technical information	2 + 10 Automatic programmes	7 Automatic programn
Product dimensions H x W x D (mm)	455 x 594 x 564	382 x 594 x 318
Oven capacity (litres)	36	21
Inverter technology		
Maximum microwave power (W) <sup>1</sup>	1000	900
Number of microwave power levels	5	5
Nominal voltage (volts)	220-240	220-240
Total connected load (kWh)	3100	1220

■ Yes, model has this feature. — Feature not available for this model.

Yes Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will

Data valid in this table as of April 2025. Subject to modification without prior notice.



<sup>&</sup>lt;sup>1</sup> According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt).
<sup>2</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

## Drawers

#### **10** 500 BF525LMB1B

#### Microwave

#### Black with steel trim







#### Soft Open / Soft Close drop down doo Safety features Digital temperature display with proposal Heating up indicator / Residual heat indicator Control panel lock / Automatic safety switch off Key features Home Connect Oven assistant with Voice control cookControl / cookControl Plus / cookControl Pr roastingSensor/ roastingSensor Plus bakingSensor Plus Oven shelf position Cleaning system activeClean pyrolytic oven cleaning HumidClean Plus Back / roof / side ecoClean® Direct liners Hydrolyse manual ecoClean setting Cooking programmes hotAir cooking (3D or 4D) Microwave (number of combination options) CoolStart / fast preheat Full width surface grill hotAir grilling Centre surface grill Keep warm / Plate warming Low temperature cooking/ Dehydrate fullSteam / pulseSteam addedSteam AirFry with homeConnect app Dough proving / reheating/defros Performance / Technical information Product dimensions H x W x D (mm) 382 x 594 x 317 201 x 308 x 282 382 x 594 x 388 Cavity dimensions H x W x D (mm) 208 x 328 x 369 Cavity capacity (litres) 900 Number of power levels 220-230 Nominal voltage (volts) Total connected loading (watts) 1.45 Cable length (cm) 130 Minimum fuse protection 10A Interior lights Door glazing Energy efficiency data<sup>1</sup> Energy efficiency index Energy efficiency class Energy consumption per cycle hotAir (kWh) Energy consumption per cycle conventional (kWl

Microwave specifications

TFT Touchdisplay with ClearText LCD white display

LightControl Intutive operation Illuminated dial

Appliance type

Model number

#### ■ Yes, model has this feature. – Feature not available for this model.

Time to cook standard load (mins)

Full width enamelled pan / Wire shelves

Standard accessories

2 year warranty

iQ 500

2 year warranty

**IQ 500** BF555LMB1B

Data valid in this table as of April 2025. Subject to modification without prior notice.

#### iQ 700 BI710D1B1B

#### Warming drawer

#### Black











Warming drawers specifications


pecifications				
Appliance type	Warming drawer	Warming drawer	Accessory drawer	Warming drawer
Model number	BI710D1B1B	BI710C1B1B	BI710E1B1	BI510CNR0B
Design family	iQ 700	iQ700	iQ 700	iQ 500
Key features & functions				
Home Connect		•	-	-
Operating indicator light	-	•	-	
Electronic control	-	•	-	-
Rotary temperature dial	-	-	-	
Touch control illuminated		•	-	-
Maximum temperature (C°)	80	80	-	80
Minimum temperature (C°)	30	30	-	30
Maximum capacity - plates	40	12	14	12
Maximum capacity - espresso cups	192	64	64	64
Toughened glass base		•	Anti-slip mat	
Plate and cup warming	-	•	-	
Keep warm			-	
Defrost	-		-	
Low temperature cooking	-		-	
Technical iInformation				
Product dimensions (H x W x D mm)	290 x 594 x 518	140 x 594 x 518	140 x 594 x 518	140 x 594 x 518
Install independently		•		
Install with compact appliance	iQ 700	iQ 700	[Q]700	iQ 700
Install with a single oven	iQ 700	iQ 700	iQ 700	iQ 700
Push-Pull opening mechanism	-			
Drawer interior volume (L)	54	20	20	20
Installation in a tall housing				
Installation under work surface	-	•		
Maximum weight capacity (kg)	25	25	15	25
Total connected loading (kW)	0.82	0.82	-	0.82
Cable length (in cm)	175	175	-	175
Minimum fuse protection	10A	10A	-	10A
GB plug			_	

■ Yes, model has this feature. – Feature not available for this model.

 $\textbf{Data valid in this table as of April 2025.} \ \textbf{Subject to modification without prior notice.}$ 



<sup>&</sup>lt;sup>1</sup> According to Regulation (EU) No 65/2014 (models with integral microwave or steam only are exempt).
<sup>2</sup> For Inverter models, the maximum setting offers a time limited boost option for heating liquids. To ensure optimal results and to protect the appliance, the microwave power output is reduced in stages over the first few minutes down to the next power level (600W). After a cooling period, the microwave boost option will be available once more.

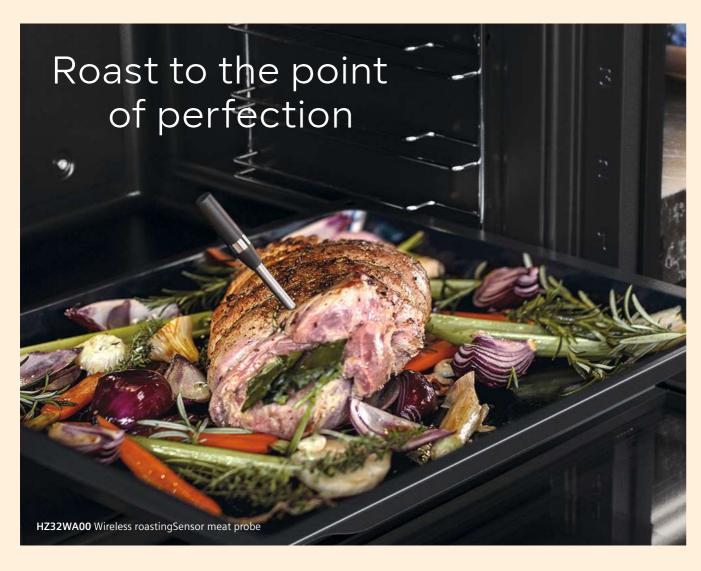

#### Wireless roastingSensor meat probe

By accurately tracking the core temperature of your dish, whether it is meat or fish, the wireless roastingSensor meat probe alerts you when the target temperature is reached and can even automatically switch off your oven.

#### Master the art of cooking with precision The four sensors gives you accurate core

temperature readings, so you can achieve perfectly cooked dishes, every time.

#### Control your cooking from anywhere

Connects via Bluetooth to the Siemens Home Connect App, allowing you to monitor and even automatically switch off the oven anywhere in your home.

#### Never overcook again

Get alerts to your phone when your dish is perfectly cooked, taking the guesswork out of cooking.

#### One device, endless culinary possibilities Designed to work seamlessly with your oven, hob, outdoor grill, and is ideal for roast beef,

#### Hassle-free and hygienic

fish, or poultry.

Water resistant for hassle-free use and effortless cleaning, ideal for home cooks.



## Cooking accessories



HZ86S000 Glass serving dish



HZ629070 Air fryer and grill tray in anthracite



HZ530000 Two-piece half depth enamelled pan set



HZ638000 1 level telescopic shelf rails with stop, fully extendible



**HZ6BMA00** Metal platform and brackets



HZ538000 Level independent varioClip telescopic rails

Ontio	Optional cooking accessories		Q700	iQ500	
Optic	That cooking accessories	Single Ovens	45cm Compact Ovens	Single Ovens	Compact Ovens
Air frying, roasti	ng & baking accessories				
HZ634000	Full width wire shelf for iQ700 and iQ500 ovens and iQ700 compacts	•	•		_
HZ664000	Full width wire shelf for iQ700 ovens and compacts with fullSteam function	=	■	-	-
HZ631070	Colour coordinated full width enamelled baking tray for iQ700 ovens and compact ovens	-		-	-
HZ531000	Colour coordinated full width enamelled baking tray for iQ500 ovens	-	-		_
HZ531010	Colour coordinated full width baking tray with non-stick coating for iQ500 ovens	-	-		_
HZ634080	Full width wire shelf for iQ700 ovens and compacts with integral microwave			-	-
HZ625071	Two-piece enamelled anti-splash pan insert for iQ700 ovens and compact ovens and iQ500 ovens	-			-
HZ636000	Full width glass tray for iQ1700 ovens and compact ovens and iQ500 ovens				-
HZ86S000	Glass serving dish - approx 40 x 25cm - for iQ700 ovens and compact ovens and iQ500 ovens	-			-
HZ915003	5.4L capacity oval glass casserole dish with lid for iQ700 ovens and compact ovens and iQ500 ovens	-			-
Telescopic rails					
HZ638000	1 level telescopic shelf rails with stop, fully extendible, for non-pyrolytic*, non-full steam iQ700 ovens*	<b>*</b>	■*	-	_
HZ638070	Level independent telescopic shelf rails with stop, fully extendible, for iQ700 pyrolytic ovens*	<b>*</b>	■*	-	-
HZ638D00	Level independent telescopic shelf rails with stop, fully extendible, for iQ700 steam ovens*	<b>*</b>	<b>■</b> *	-	-
HZ629070	Air Fryer & Grill tray In Anthracite. Required for Air Fry Function, for iQ700 Ovens	•			
HZ530000	2 piece half depth enamelled pan set for single ovens	•	-	-	-
HZ538000	1 pair of level independent varioClip telescopic rails for iQ500 single and double ovens	-		•	_
Installation acce	ssories				
HZ6BMA00	Metal platform and brackets suited to combinations of iQ700 60cm Single ovens and 45cm Compact ovens in column (special single aperture required)	•	•	-	-
H766X600	Cosmetic decor strip for use between 60cm single and 45cm compact ovens				

<sup>■</sup> Yes, compatible. – No, not compatible. \* Main cavity only

#### flexInduction hob accessories 3-piece set **HZ9FF030** flexInduction pan sets Our flexInduction pans designed specifically to be used across our induction and flexInduction hobs, are also oven-proof up to 220°C with a non-stick coating so that food cooks perfectly while also being easy to clean. Perfect when you want to start HZ9FF040 a dish on the hob and finish crisping it up in the oven. They are also easy to (Consists of 1 x Flex Pan large, 1 x Flex Pan (Consists of 1 x Flex Pan large, 1 x Flex Pan stack to maximise storage space. medium and 1 x Flex Pan small with lid) medium and 2 x Flex Pan small with lids)



## Pure precision for perfect coffee indulgence

#### Immerse yourself in the world of coffee.

The Siemens fully automatic built-in coffee machine is designed to deliver a great coffee experience, thanks to the interaction of all components - a result of our years of experience and strong commitment to research and

#### Pure precision for perfect coffee indulgence with our built-in coffee machine.

Our iQ700 built-in coffee centre conveys an elegant impression of absolute quality and intelligent innovation for those passionate about coffee.

The design of the iQ700 coffee centre is perfectly aligned with the entire iQ700 series. To keep the sleek lines looking clean, all milk, water and bean containers are conveniently hidden behind the coffee centre's door, while the TFT touchDisplay and LED lights put each coffee in the spotlight.

Designed with easy access to the water tank, bean holder and insulated milk jug, the coffee centre has front access thanks to a hinged front panel to allow quick and easy access to replace the water or beans. The milk tubes are also cleaned with steam after every coffee with milk and as most of the components are removable and dishwasher safe, they are also easy to clean. Easy to install, the machine requires no extra plumbing.





#### oneTouch function

The Siemens coffee machine can deliver delicioustasting coffee – from latte macchiato, creamy cappuccino to extra-strong espresso at the touch of a button. The system prepares coffee and milk specialities automatically, which can be customised to the user preference.



Different coffees require the espresso shot to be heated at a different temperature in order to achieve the perfect results. sensoFlow does this automatically, every time.

#### A wide world of coffee to experience.

Get more with Siemens bean-to-cup coffee machines and built-in models. The Siemens Home Appliances App gives access to exclusive coffee drinks and intuitive remote functions directly via a smartphone, tablet or voice assistant.

#### **Siemens Home Connect**

With the Siemens Home Appliances App additional features and drinks are available. Select from a range of additional drinks from coffeeWorld, either with a smart device or by asking a voice assistant to make the chosen drink. Push notifications are sent from the machine, for example, when the beans are running low or when the machine needs cleaning.

The coffeePlaylist allows creation of a list where each guest can personalise their own drink and remotely send the order to the machine so they are automatically prepared one after another.

Connected partners including Amazon Alexa, offer additional flexibility like making a drink using voice control whilst IFTTT allows the creation of bespoke applets connecting the coffee machine to other smart home appliances to create personalised routines.







#### iQ 700 CT718L1B0

#### Built-in coffee centre Black







#### Built-in coffee centre specifications

Appliance type	Coffee centre – built-in
Design family	iQ 700
Model number	CT718L1B0
Design characteristics	
TFT Touchdisplay Pro	
TFT Touchdisplay Plus	-
TFT Touchdisplay	-
Key features	
Home Connect	
Electronic control	
sensoFlow System	
AromaDoubleShot	
Automatic steam blast milk cleaning function	
oneTouch preparation	
Ceramic coffee grinders	
Multilevel grinding setting	
Cup illumination	
Height adjustable coffee & milk outlets (mm)	
Integrated water filter	Optional
Programmes / functions	
Type of beverages	21
my Coffee - personalised beverage settings	1 or 2 cup
Milk foam	1 or 2 cup
Hot water	1 or 2 cup
Warm milk	1 or 2 cup
Ristretto	1 or 2 cup
Coffee	1 or 2 cup
Espresso	1 or 2 cup
Cappuccino	1 or 2 cup
Latte Macchiato	1 or 2 cup
Caffe latte	1 or 2 cup
Espresso Macchiato	1 or 2 cup
One touch function for milk drinks	
Coffee / Hot water temperature options	3/4
Milk foam / frothing function	■/■
Warm Milk function	
Cleaning / descaling / programmes	■/■
Automatic rinse when switched on/off	<b>■</b> /■
Performance / Technical information	
Installation in a tall housing	
Side opening door (left hinged)	
Bean container capacity (g)	500
Ground coffee container	
Water tank capacity (litres)	2.4
Total connected loading (W)	1500
Nominal voltage (volts)	220-240
Fuse protection	10A
Cable length (in cm)	170
Standard accessories	
Insulated Milk container capacity (litres)	0.5
Milk pipe	

■ Yes, model has this feature. - Feature not available for this model Data valid in this table as of April 2025. Subject to modification without prior notice



#### The Siemens iAroma System



Experience the unique iAroma System available with Siemens fully automatic espresso machines: Innovative features work seamlessly together to guarantee the perfect taste and long-lasting product.



**The long-lasting ceramic grinder** creates the ideal ground coffee for perfect aroma.



**The intelligent flow heater** guarantees the perfect temperature every time.



**The smart water pump** – for the right water pressure every time.



The high-tech brewing unit creates great aroma thanks to its fine-tuned and precision controlled brewing operation.

## At home. In style

Delicious barista-style drinks at home with the Siemens EQ freestanding bean-to-cup coffee machines.

The world of cafe culture is at hand with the exciting range of EQ fully automatic bean-to-cup coffee machines designed for those that settle for nothing less than exceptional coffee.


With intelligent iAroma technology, 3 key innovations are combined together in a high quality brewing unit to deliver truly sensational tasting beverages. These intuitive appliances stand out on any premium kitchen surface with their stunning design, elegant display panels and optimal usability. From the entry-level compact EQ300 models to the fine-tuned connected EQ700 and EQ900 models.


#### Our top of the range machine: EQ900 S700



#### baristaMode: Individualise your coffee creation

There are five essential parameters of baristaMode that contribute to the quality of coffee and espresso: coffee strength, amount, temperature, coffee-to-milk ratio and brewing speed. The baristaMode allows for even finer, fully customised adjustments to please any coffee taste. Alternatively in comfortMode the machine makes these adjustments automatically leaving only the option to personalise strength and aroma.





drink preparation.

Two separate coffee bean containers, each with its own grinder, ensure that the beans never get mixed up and guarantee that the desired flavour will always be achieved.



beanIdent System: Get the most out of every roast Many factors influence the flavour profile of a coffee bean. The region where it is cultivated, with its specific climate and soil, as well as the type of roasting, all play a part. The beanIdent System optimally adjusts all brewing settings to ensure the full aromas are extracted. Simply enter the variety and roasting level and let the EQ900 work its magic.



#### TFT display

The large, clear and colourful TFT display and disc control make managing drink preferences simple and intuitive with the EQ900 S700 machine.



#### superSilent

Optimised soundproofing enables the most remarkable noise reduction.



Perfect pleasure at the touch of a button: oneTouch function.



No matter the coffee speciality whether it is latte macchiato, creamy cappuccino or extra-strong espresso, thanks to the oneTouch function this fully automatic coffee machine can serve up pure coffee indulgence at the touch of a button.



For longer-lasting coffee indulgence: calc'nClean.



For busy mornings and tired evenings: drinks on demand.



Maximise beverage quality, product lifetime and overall hygiene of the EQ coffee machine with the combined cleaning and descaling programme. Easy to use, calc'nClean provides a thorough clean and rinse, keeping the machine perfectly clean inside.

All our coffee machines have a minimum of 4 pre-set drinks available to select from the display. From the EQ300 models that have the option of Americano, Cappuccino, Espresso and Latte Macchiato all the way through to the top EQ700 model that offers all of these plus 7 more drink options. The Siemens Home Appliances App allows access to an even wider, ever-growing range of beverage options with coffeeWorld.



## Freestanding coffee machines

#### TQ907GB3

EQ900 S700 Fully Automatic Espresso Machine **Stainless steel** 







## Indulge in the latest coffee trends



#### Cold Brew and Slow Brew

With its 3 new drink options, the EQ700 and EQ900 (beverage option available to download via the Siemens Home Appliances App) open up a world of possibilities for your taste buds.



By eliminating the use of hot water, this innovative brewing process enhances the fruity notes of your preferred roast, delivering a truly delightful cup of coffee. For an extra burst of freshness, savour your Cold Brew with a few ice cubes. These new drinks are also integrated into coffeeWorld on the device and app.



#### Cold brew

A distinct taste profile that is characterised by a smooth, low-acidity flavour. The process extracts the flavours from the coffee beans slowly and gently, resulting in a brew that is less bitter and more balanced. Just add ice.

#### Cold brew macchiato:

Combines the much loved smooth cold brew topped with creamy milk or milk foam, resulting in refreshing and indulgent beverage with a rich, velvety texture and a touch of sweetness. Just add ice.



#### Slow brew

A thorough and gradual release of the coffee's essence, resulting in a cup that is rich, well-rounded, and deeply satisfying.







Freestanding bean-to-cup coffee machine specifications




	EQ900		EC	2700	EQ300	
Model name	EQ900 with dual hopper and Beanldent	EQ900	EQ700 Int. Fully Automatic Espresso Machine	EQ700 Classic + Fully Automatic Espresso Machine	EQ300+ Fully Automatic Espresso Machine	EQ300 Fully Automatic Espresso Machine
Model number	TQ907GB3	TQ903GB9	TQ717GB3	TQ713GB3	TF303G07	TF301G19
Features						
Material / finish	Stainless steel front and body	Piano black front, stainless steel	Stainless steel	Stainless steel	Lacquer front	Piano black
SensoFlow Heater				-		
Ceramic grinder	Ceramdrive	Ceramdrive	Ceramdrive	Ceramdrive	1 x ceramic	1 x ceramic
Milk solution	Integrated	Integrated	Integrated	Integrated	Milkperfect	Milkperfect
beanIdent System		-	-	_	_	-
Bean container capacity (g)	Dual hopper: 270g and 250g	375g	320g	320g	250g	250g
Water tank capacity (litres)	2.3	2.3	2.4	2.4	1.4	1.4
One touch drinks				-	•	
Removable brewing unit	-					
Beverage choice	36* *requires update of software via HomeConnect upon set up of machine	33	35	35	4 + Milk Foam	4 + Milk Foam
Display	TFT	TFT	iSelect Display	iSelect Display	Text & symbol	Text & symbol
Pump Pressure	19 bar	19 bar	19 bar	19 bar	15 bar	15 bar
oneTouch DoubleCup	incl. milky drinks	inc. milky drinks	incl. milky drinks	incl. milky drinks	Black only	-
itrength settings	Barista Mode	Barista Mode	4	4	5	3
emperature settings	Barista Mode	Barista Mode	0	0	1	1
Lup size settings	Barista Mode	Barista Mode	4	4		
Coffee-milk ratio adjusts					-	-
Noise level	Super silent	Super silent	Quiet	Quiet	Standard	Standard
Number of bean grinders	2	1	1	1	1	1
Connectivity	Home Connect	Home Connect	Home Connect	Home Connect	-	-
Jser Profiles	10	3	10	10	-	-
Lup warmer	-	-		-	-	-
ean lid rubber seal	-	•	-	-	-	-
Brewing unit type	Spindle	Spindle	Spindle	Spindle	Spindle	Spindle
Service door access	Side	Side	Side	Side	Front	Front
Barista mode			Aroma Select	Aroma Select	-	-
Cup illumination		•		•	_	-


<sup>■</sup> Yes, model has this feature. – Feature not available for this model.


Data valid in this table as of April 2025. Subject to modification without prior notice.

## Oven technical diagrams


Single ovens HM778GMB1B, HB778G3B1B, HM776G1B1B, HB776G1B1B, HB736G1B1B, HB772G1B1B and HB732G1B1B




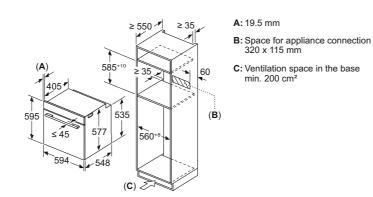




#### Single ovens HB578GBS7B and HB537GBS3B







A: 19.5 mm
B: Space for appliance connection 320 x


#### Installation with a hob.






#### Single ovens HR776G1B1B HS758G3B1B, and HS736G1B1B








- **B:** Space for appliance connection 320 x 115 mm
- C: Ventilation space in the base min. 200 cm<sup>2</sup>

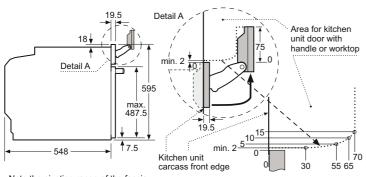


Note the pivoting range of the fascia.

## Oven technical diagrams


#### Compact ovens CM778GNB1B, CM776G1B1B, CM736G1B1B and CM724G1B1B

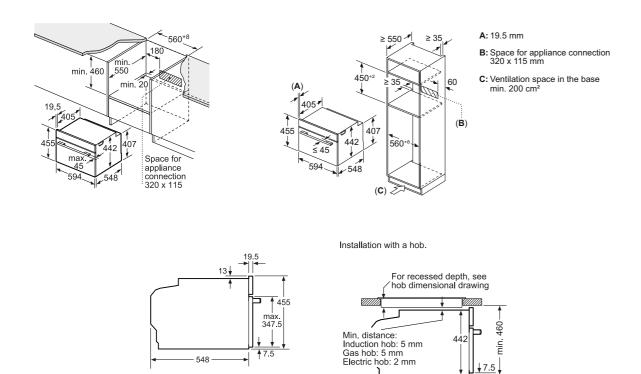


#### Compact oven CS736G1B1

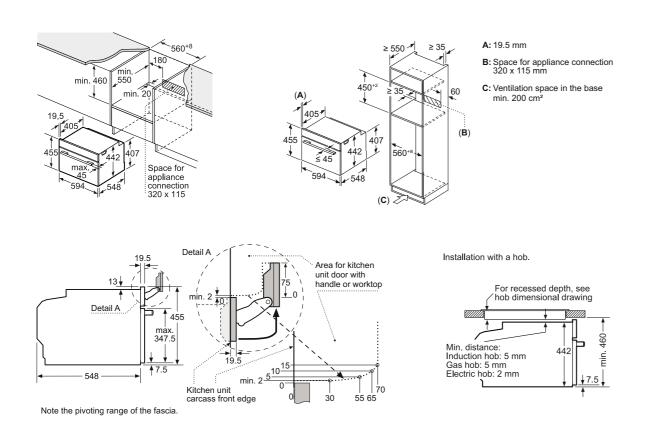

#### Compact microwave combination CM585AGS0B

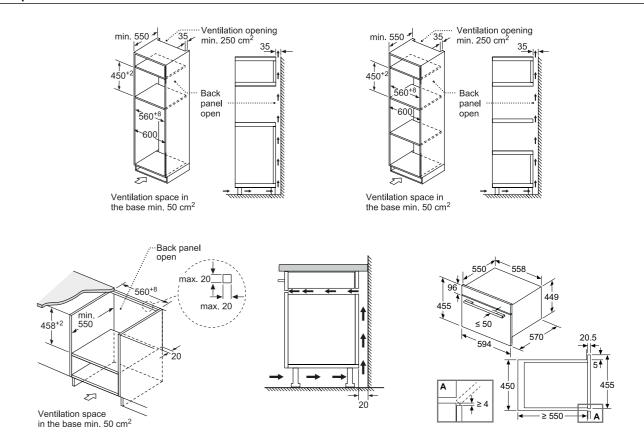


#### Compact microwave oven CE732GXB1B

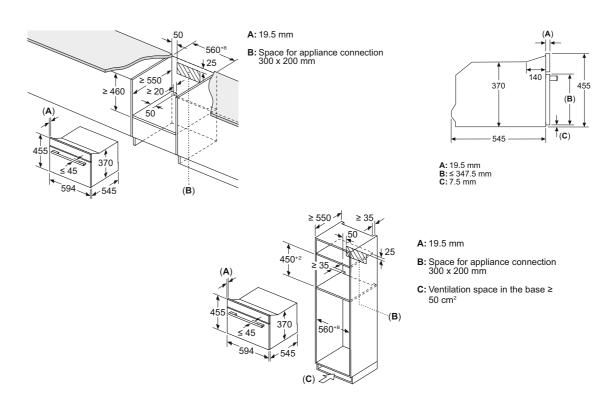


### Microwave oven technical diagrams


#### Microwave BF722L1B1B

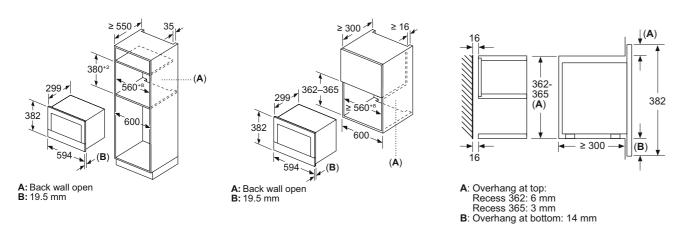

#### Microwave BF555LMS0B

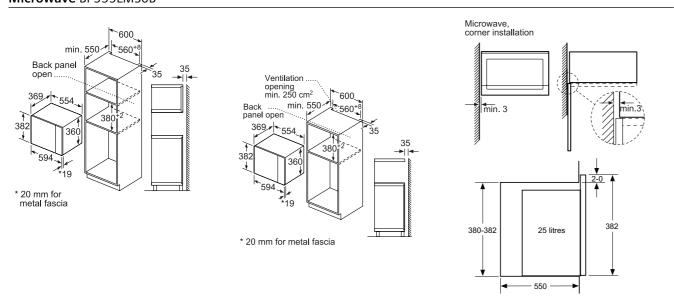


#### Microwave BF525LMS0B

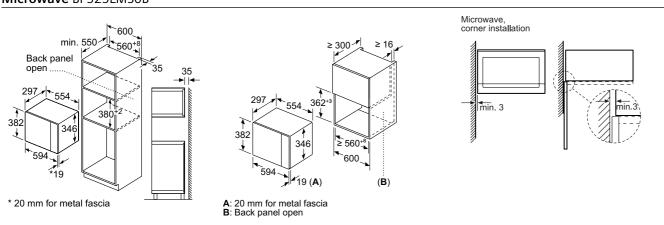


## Warming drawer technical diagrams

#### Warming drawer BI710D1B1B

#### Warming drawers BI710C1B1B and BI710E1B1









A: 287.5 mm

Ovens with appliance height of 595 mm can be installed above the warming drawer without an intermediate floor.







**A:** 7.5 mm

Compact ovens with appliance height of 455 mm can be installed above the warming drawer without an intermediate floor

#### Warming drawer BI510CNR0B







Compact ovens with an appliance height of 455 mm can be installed above a warming drawer.
An intermediate floor is not required.

## Coffee centre technical diagrams


#### Coffee centre CT718L1B0



Bean and water containers are removed fror the front
Recommended installation height



Bean and water containers are removed from the front Recommended installation height 950–1450 mm



# Induction, ceramic and gas hobs. Designed to impress

The Siemens hob range combines stunning design with innovative technology and ergonomic design.

The advanced technology available on Siemens hobs ensures the cooking experience is as enjoyable as possible, while time-saving features help prepare dishes quickly and effortlessly. With a wide range of styles, sizes and cooking types to suit any needs and kitchen design.




#### Siemens hob warranties:



#### 2 year warranty

A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.

To find out more about warranty and for registration, please visit: UK: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: siemens-home.bsh-group.com/ie/customer-service/warranty

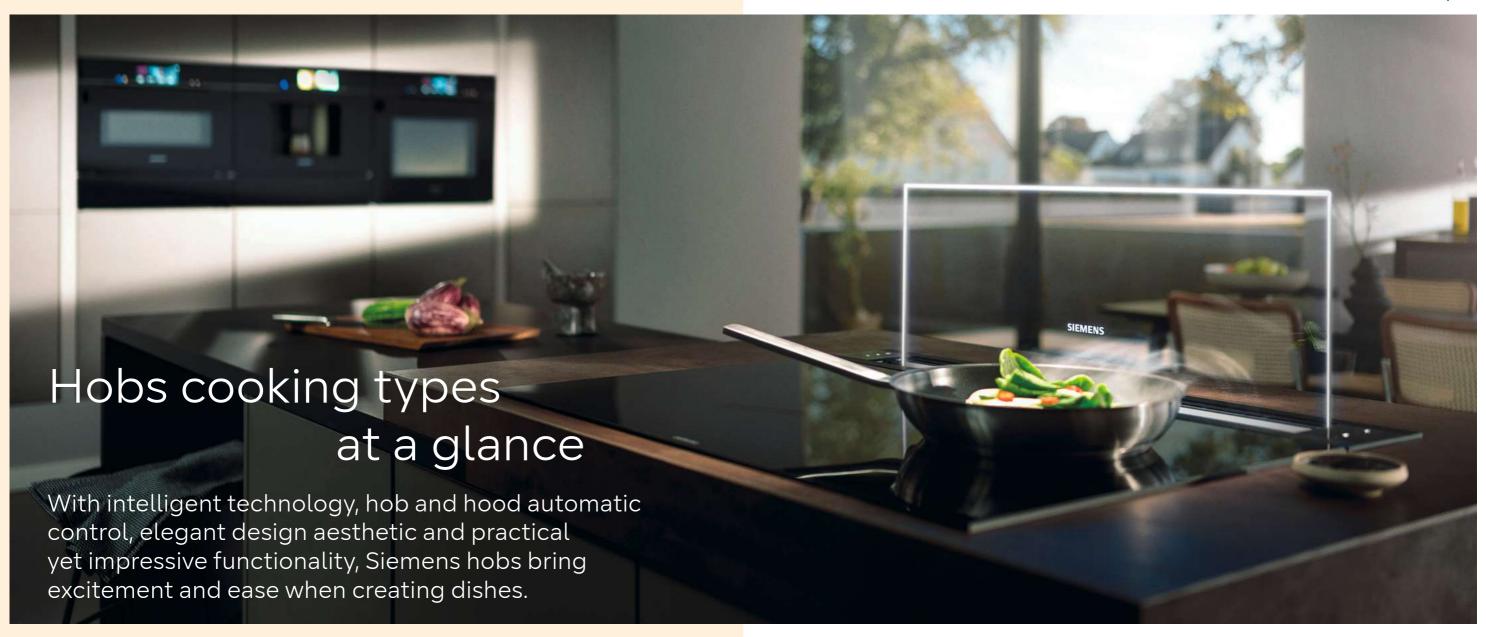

#### Induction cooking



#### inductionAir Plus venting hobs

The inductionAir Plus venting hobs provide the freedom to design the kitchen flexibly, with the added benefit of hassle-free cleaning. The innovative design means that the grease filters fit into an entirely detachable liquid tray unit which is designed to completely protect against spillages and over-boiled liquids.

Model shown: ED851HQ26E (page 72)



#### flexInduction hobs

Siemens flexInduction hobs are a must for diverse cooking. The cooking area can be tailored to the user's cooking needs: from using as a traditional induction hob with four or five separate zones – for boiling rice, for example - to linking the zones together to form one zone for larger cooking pans.

With flexInduction Plus, the hob automatically knows how large the cookware is. This provides even heat with the use of an additional central zone if the hob detects that the pan is too large.

Model shown: EX975LVV1E (page 78)



#### Induction hobs

Induction cooking is recognised as being one of the quickest, safest and most efficient methods of cooking available. When a pan with a ferrous or magnetic metal base is placed on the hob, the coil situated below the ceramic surface uses an electromagnetic field to create heat, almost instantly heating the pan. With only the base of the pan heated the cooking zone stays cooler.

Model shown: ED851HWB1E (page 81)

#### Ceramic cooking



#### quickLite hobs

The surface of a glass ceramic hob heats up quickly and conveniently, while also being easy to clean due to the smooth and even surface. The cooking zones glow red when they are on and the temperature can be adjusted precisely, with up to 17 power levels. Siemens highSpeed cooking zones are also optimised for fast cooking and heat up almost instantly.

Model shown: ET81RBHA1D (page 86)

#### Gas cooking



#### Gas hobs

Tradition meets innovation – with their modern functions, Siemens gas hobs provide enjoyment in cooking like a pro. Low profile, single piece burners on glass completes the sleek appearance.

Model shown: ER9A6SH40 (page 96)

#### Domino cooking







#### Domino hob

Domino hobs can be be installed alone or side by side with other types of compatible hobs. Domino cooking gives you more cooking options, for example the 40cm wide Teppan Yaki is ideal for combining with other domino or faceted design cooktops to create a bespoke cooking area.

Models shown: EX375FXB1E, ER3A6AI10, and ER3A6BI40 (pages 100-101)

Hobs | Key features - Hob options Key features - Control panel options | Hobs

## The perfect hob for any kitchen design

#### A perfect finish suitable for any modern kitchen.

Siemens provides a wide selection of quality hob choices to ensure there is enough variety to choose from to match any kitchen style.





Black ceramic glass


Black tempered glass


#### Perfectly framed.

Siemens offers a variety of finishes to the hob frame to give the freedom to create a specific look or even match the hob to other Siemens products; from stand out premium steel trims to sleek flushline trims that fit neatly in line with the worktop surface.



Front bevel and side trims





3 sided bevelled frameless finish





Front bevel Frameless



#### The perfect width.



Our hob range is available in a range of widths to suit specific kitchen design and needs. Our choice of induction hobs come in 60, 80 and 90cm options, gas is available in 60, 75 and 90cm options and venting hobs come in 60, 70 and 80cm options. Our domino induction and domino gas hobs come in 30cm to allow for more freedom with kitchen design.

#### Fingers on the pulse of innovation.





#### TFT touchDisplay

The innovative TFT touchDisplay allows the user to get the most out of the Siemens induction hob. The full colour touch screen is intuitive and easy to use with clear information about the hob's status at all times as well as additional settings that open up new possibilities. The settings for each individual cooking zones can be selected intuitively for easy control. The zones can even be combined when needed for added flexibility - for example, for different sizes of cookware and various accessories. The display screen gives access to a new world of recipes which can help cook the perfect dish in just a few simple steps, complete with images and clear text.





#### **Dual lightSlider**

The dual lightSlider offers easy operation and selection of the cooking zones of the iO700 induction hobs via one neatly arranged interface that illuminates when the hob is turned on. The power level of the cooking zones can be simply adjusted by sliding a finger along the lit scale or selecting the desired power level directly with precise control. When the hob is switched off, the controls are completely invisible for a sleek finish to the kitchen. As there are no protruding parts, cleaning is made even





#### **TFT Control**


The TFT Control makes the access and operation of the hob functions easy and ensures good readability from any perspective.





#### touchSlider


The ergonomic touchSlider sits flush to the appliance, the power level scale can be adjusted to the desired setting at the slide of a finger, with control advances in half-levels from 1 to 9. Alternatively, the desired level can be selected directly for faster adjustments to the cooking zone temperature.





#### touchControl

Thanks to advanced touchControl technology, Siemens hobs can be operated by simply touching the surface. This means the controls are seamlessly integrated into the surface, which makes cleaning even easier.





#### frontControl

Gas hobs with the frontControl feature have all controls at the front of the appliance for ease of

Hobs | Key features – Home Connect

Key features – Induction | Hobs

## Designed to make life easier

The Siemens Home Appliances App offers more flexibility by allowing the user to monitor appliances settings, including on/off status, active cooking zones, child lock implentation and cooking time status from anywhere. A wide range of recipes are available via the app and the cooking and temperature settings can be sent directly to the hob, perfect for busy evenings.

Take your cooking experience to the next level by connecting together a Siemens Home Connect hood with a Siemens Home Connect hob and access additional benefits. The integration of these two appliances allows more convenience with smart and synchronised functionalities. For instance, when the hob is started, the hood is automatically activated and adjust to the ideal settings, ensuring proper ventilation and eliminating the need for manual operation. This synchronisation enhances energy efficiency and optimises the effectiveness of both appliances.



#### **Smart features**

Available on selected models



#### Intelligent hood automatic

The hood matches the fan level to the temperature and power of the hob, allowing to cook from start to finish without ever touching the hood by simply pairing both appliances with the Siemens Home Appliances App.



#### cookConnect system

Control the hood's power levels and lighting directly from the hob after pairing both appliances via the Siemens Home Appliances App. On top of this, once the hob is switched on, the hood will start automatically.



#### **Favourite button**

When connected to the Siemens Home Appliances App, the favourite button can be programmed to perform a chosen action. Whether it is activating a specific heat and timer setting, switching on hood lighting, or turning on other connected appliances and devices using IFTTT.



#### climateControl sensor

The climateControl sensor automatically adjusts the power level of the hood depending on the level of steam and odours in the air – keeping the kitchen fresher without having to manually adjust the power. The climateControl Sensor is activated by selecting the 'auto' button.

For more smart hood features see pages 148-149.

#### Have it your way with Siemens Home Connect



Intelligent connectivity gives more control, support and freedom. Whether it is getting a notification when dinner is ready, lowering the heat on the hob via a smartphone or tablet, or asking the smart assistant speaker (Amazon Alexa or Google Home) to turn off the hob while the table is being set, Siemens Home Connect gives access to more flexibility and more ways to personalise the kitchen.

Some of the features displayed can be accessed only if the device is connected to a Home Connect Account and a SingleKey ID account via the Internet. Home Connect is a service of Home Connect GmbH. For more information on Home Connect, visit www.home-connect.com/gb/en

Discover more exciting possibilities for a seamless life with Siemens and Siemens Home Connect. For more information visit siemens-home.bsh-group.com/uk/inspiration/innovation/connected/hobs-and-hoods



#### Discover the powerful responsiveness of Siemens induction cooking.



#### powerInduction

Instantly hot. Instantly cooler. With Siemens powerInduction the heat is conducted directly to the pans and their contents via induction coils, without heating the hob. Heat-up times are short, safety is increased, energy is saved and the hob is much easier to clean.



#### cookingSensor Plus ready\*

Once attached to the pot, the cookingSensor Plus interacts with the cooktop, giving a signal when a certain temperature has been reached and keeping it exactly at that level to prevent overboiling.

\*requires optional accessory HZ39050 cookingSensor Plus



#### powerMove

Enables intuitive control by splitting the hob into various zones with different set temperatures (low to high). Depending on the hob it has 2, 3 or 5 different zones.



#### fryingSensor Plus

Makes frying easier by automatically maintaining the ideal temperature to ensure the food is cooked just right. Once the preferred programme is selected depending on the type of food to be cooked, a signal will notify when to add oil to the pan and add the food – fryingSensor Plus then takes control. The sensor delivers full precision when frying by keeping the dish at the defined temperature level as soon as this has been reached.



#### powerBoos

Increases power by up to 50% which can save on the time it takes to heat up pots or cook large quantities depending on the chosen dish.



#### panBoos

This feature heats cookware faster than when using heat setting 9. After 30 seconds, this function automatically switches itself off and reverts back to power level 9.



#### Combi-Zone

When using larger pots and pans, the Combi-Zone connects two induction zones together to ensure better heat coverage.







Please note: these features are on selected models. For information on model specification, please check pages 81-83.



## Our best induction hob, evolved: inductionAir Plus



The Siemens inductionAir Plus system combines cutting-edge induction technology, such as Combi-Zones and powerMove Plus, with sleek, integrated ventilation. Favoured in open plan and compact kitchens, inductionAir Plus hobs give a sense of free-flowing space and light for a more social experience within the kitchen.

#### inductionAir Plus hob

The inductionAir Plus hob gives more design flexibility when planning a kitchen, with the added benefit of hassle-free cleaning. The innovative design means that the grease filters fit into an entirely detachable liquid tray unit which is made to completely protect against spillages and over-boiled liquids.

#### How does it work?

All parts of the inductionAir Plus hob are neatly arranged in a liquid tray unit, accessed from the top of the hob. Each part is dishwasher-proof, including the black glass air inlet grid, the 2-in-1 grease filter and the liquid tray. Each part is also separate to save space in the dishwasher.

#### Protects from spills

As a first layer of protection, the black glass air inlet grid is designed to limit the flow of liquids into the ventilation module. As a second layer of protection, the liquid tray captures up to 200ml from day-to-day cooking and can be easily discarded. In addition, up to 700ml of additional liquid can be held in the liquid safety tank accessed from beneath the appliance, and safe-guarding the appliance from damage.





#### The perfect fit.

#### Size flexibility

The inductionAir Plus hob comes in 3 variants of size: 60cm, 70cm and 80cm. This means that, whatever space is available, there is an inductionAir Plus hob that will fit in perfectly.

#### Installation options

There are 4 different ways to install the inductionAir Plus hob, giving you plenty of options as to how and where to install it.

See page 64-65 for an outline of installation options and accessory requirements.




Scan to view installation options

 $\epsilon$ 

# Venting hobs – installation options

Depending on your chosen extraction route we have created a selection of ducting kits to simplify the installation process.

Select your chosen extraction mode from the options below.

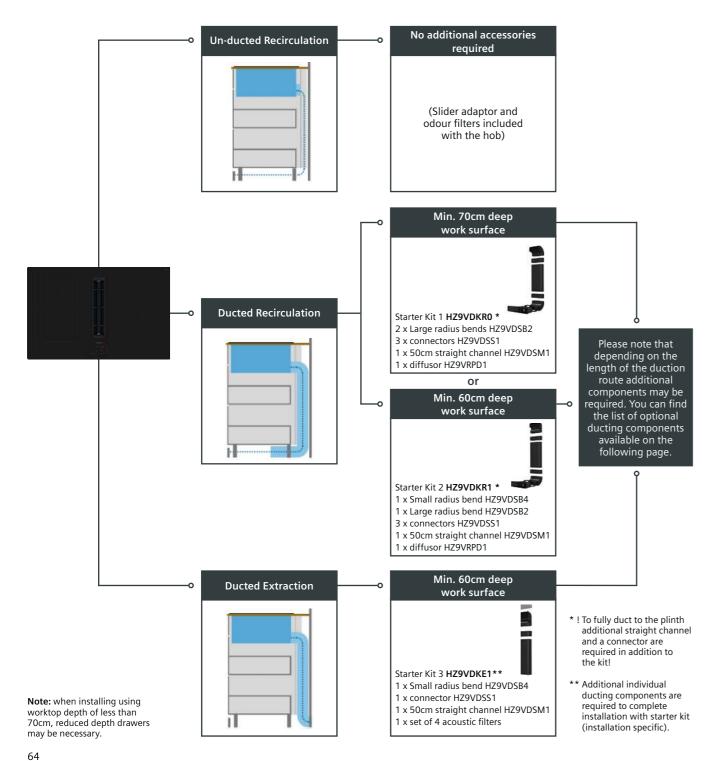

#### Optional additional individual ducting components 500mm long flat channel ducting section -HZ9VDSM1 outlet size 222mm x 89mm 1000mm long flat channel ducting section -HZ9VDSM2 outlet size 222mm x 89mm Flat channel 90° horizontal bend, for worktop depth minimum 65cm – HZ9VDSB1 outlet size: 222mm x 89mm Flat channel 90° vertical bend (large radius), for worktop depth minimum 70cm – HZ9VDSB2 outlet size 222mm x 89mm Flat channel 90° vertical bend (medium radius), for worktop depth minimum 65cm – HZ9VDSB3 outlet size: 222mm x 89mm Flat channel 90° vertical bend (short radius), for worktop depth minimum 60cm -**HZ9VDSB4** outlet size 222mm x 89mm Connection piece for use between straight channel ducting components and bends – HZ9VDSS1 outlet size: 222mm x 89mm Flexible Connection piece for use between straight channel ducting components and bends – HZ9VDSS2 outlet size: 222mm x 89mm Straight Adaptor / Converter flat to round (Ø 150mm) -HZ9VDSI0 outlet size: 222mm x 89mm 90° Adaptor / Converter flat to round (Ø 150mm) -HZ9VDSI1 outlet size: 222mm x 89mm Diffusor for ducted recirculation -11-HZ9VRPD1 outlet size: 222mm x 89mm HZ9VRCR1 1 x set of cleanAir Plus recirculation filters

#### Additional planning notes for vented hob installation Ducted recirculation using starter Ducted recirculation using starter Ducted exhaust extraction using kit HZ9VDKR0 for min. 70cm kit HZ9VDKR1 for min. 60cm Starter kit HZ9VDKE1 for min. 60cm worktop depth worktop depth worktop depth (B) (C) • Install the filters into the hob • Install the filters into the hob (included with venting hob) (included with venting hob) • Use the adhesive to seal the first Use the adhesive to seal the first bend into the back of the hob bend into the back of the hob • Discard the telescopic slider piece • Discard the telescopic slider piece included with venting hob included with venting hob



#### flexInduction, no-compromise cooking at its best.



Siemens flexInduction hobs are a must for diverse cooking. The cooking area can be tailored to individual needs, so it can either be used as a traditional induction hob with separate zones, or by linking the zones together for larger cooking pans. flexInduction also includes boost settings, automatic pan recognition and touchSlider controls.



Each flexInduction zone houses four innovative elongated inductors beneath the glass, which act independently to detect the presence of cookware on the hob. The individual inductors only work when cookware is detected, whether that is a 10cm flex pan placed in one corner, or a large griddle plate covering the whole zone. With only specific areas active at any particular time, no energy is wasted. And for an even more versatile cooking, the triple flexInduction hob provides maximum versatility with three flexInduction zones. flexInduction is no-compromise cooking at its best.





With flexInduction Plus, the cooking zones automatically adapt to the sizes of pots and pans of up to 30cm in diameter. If one cooking zone is not sufficient, additional inductors are automatically activated to ensure the heat is evenly applied at all times. flexInduction Plus offers additional flex zones for even larger pans. In 90cm variants an additional flex zone is possible with additional inductors below the hob surface situated in the centre of the hob. For 80cm flexInduction Plus hobs, the left and right zones can be extended further to allow for a larger cooking space. For 60cm flexInduction Plus hobs, no matter which side of the pan goes over, a central zone is automatically added.





#### Induction cooking

Induction cooking is recognised as being one of the quickest, safest and most efficient methods of cooking available.

When a pan with a ferrous or magnetic metal base is placed on the hob, the coil situated below the ceramic surface uses an electromagnetic field to create heat, almost instantly heating the pan. With only the base of the pan heated the cooking zone stays cooler.

Easier to clean and safer to use, because the ceramic cooking surface is warmed only by the heat transferred back from the cookware and its contents, spillages are less likely to burn on. So there is normally no need to wait for the glass to cool down before simply wiping it over with a cloth, there is some residual heat from the cooking process but there is a reduced risk of burning on high temperatures from the hob surface. And if the induction hob is turned on without a pot or pan being placed on it, the hob itself will not heat up which reduces the risk of getting burnt.



#### Black glass finish

Our stunning induction hobs feature a black glass finish and bold displays. Our stylish collection mimicks the aesthetics of our built-in ovens and microwaves, so our kitchen appliances can truly complement one another.



## Hob accessories

For additional cooking flexibility Siemens provide a range of accessories for our flexInduction, gas and domino hobs.

#### flexInduction hob Accessories

#### Pan sets

This range of induction pans are designed to work perfectly with induction and flexInduction hobs. The rectangular shape fits perfectly to the induction zones and the pans are all oven-proof up to 220°C with a non-stick coating so that food cooks perfectly while also being easy to clean. They are also easy to stack to maximise



(Consists of 1 x Flex Pan large, 1 x Flex Pan medium and 2 x Flex Pan small with lids)



(Consists of 1 x Flex Pan large, 1 x Flex Pan medium and 1 x Flex Pan small with lid)





#### Wireless roastingSensor meat probe

By accurately tracking the core temperature of your dish, whether it is meat or fish, the wireless roastingSensor meat probe alerts you when the target temperature is reached and can even automatically switch off your oven.

For more information on the wireless meat probe, see page 40.





#### Griddle pan

Converts our induction cooktop into a grill, specially designed for use across four flexInductors. The griddle pan maintains an even heat, perfect for frying steak or for roasting meat, fish, and vegetables.



HZ390522



Heating extremely quickly the Teppan Yaki is great for fast Japanese cooking. Perfect for a cooked breakfast or a healthy stir-fry, the pan will fit across either three or four flexInductors.



34x20cm HZ9TY010



#### Roasting dish

Perfect for use with flexInduction hobs this multipurpose dish is a must when cooking



Roasting dish HZ390011

#### Gas Accessories



Cooking oriental meals in a wok, requires a high temperature. This wok ring helps to regulate heat and concentrate the open flame to one area.



#### Domino Hob Accessories



temperature sensor

HZ39050






Cast iron non-stick frying pan HZ9FE280

OPTIONAL ACCESSORIES FOR HOBS	
CookingSensor Plus Wireless temperature sensor for cookingSensor Plus ready models	HZ39050
Connecting strip for use with side trim hobs	HZ394301
Flex Pan Set 4 pcs. Perfect universal pans for the FlexZone. Consists of 1 x Flex Pan large, 1 x Flex Pan medium and 2 x Flex Pan small with lids	HZ9FF040
Flex Pan Set 3 pcs. Perfect universal pans for the FlexZone.  Consists of 1 x Flex Pan large, 1 x Flex Pan medium and 1 x Flex Pan small with lid	HZ9FF030
Flex Pan large approx. 35 x 22cm. Perfect universal pan for the FlexZone	HZ9FF010
Teppan Yaki approx. 34 x 20cm. Perfect for the FlexZone	HZ9TY010
Four piece pan set, suited for induction, radiant ceramic and gas.  Consists of 1 x sauté pan, 2 x pots with lids and 1 x milk pan	HZ9SE040
Six piece pan set, suited for induction, radiant ceramic and gas. Consists of 2 x sauté pan, 3 x pots with lids and 1 x milk pan	HZ9SE060
Cast iron non-stick frying pan, suited for induction, base diameter 185mm	HZ9FE280
BergHOFF three piece induction pan set	HZ9SE030
Griddle plate, approx. 40x20 cm for use with flexInduction	HZ390522
Teppan Yaki, approx. 40x20 cm for use with flexInduction	HZ390512
Oval roasting dish with lid for use with induction hobs	HZ390011

For more details on the range of accessories available please visit siemens-home.bsh-group.com/uk/shop

# inductionAir Plus hobs product overview

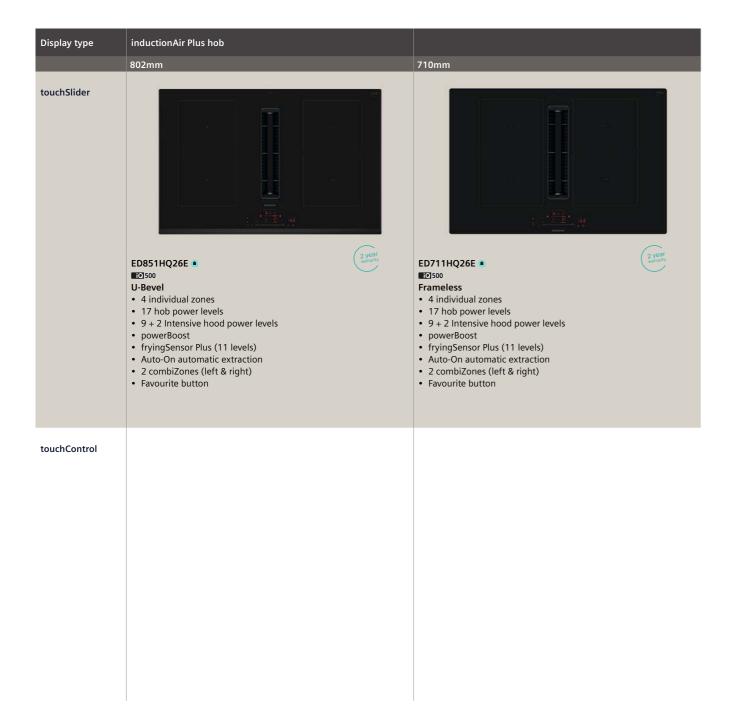






### 2 year warranty

A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.

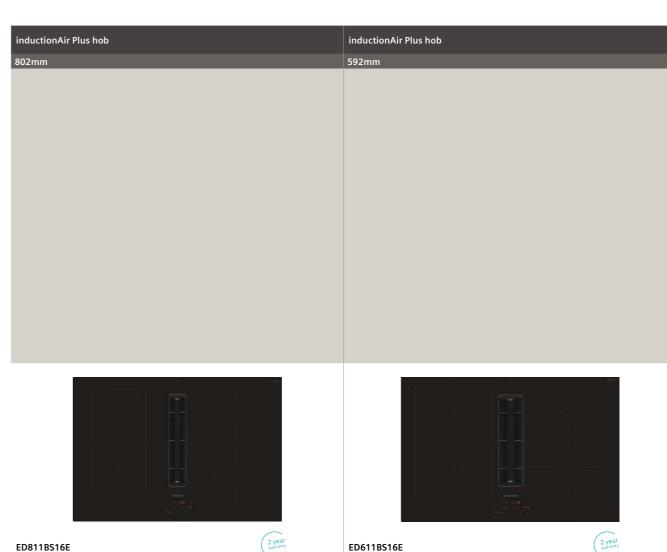

### Frameless

- 4 individual zones
- 17 hob power levels
- 3 + 1 Intensive hood power levels
- powerBoost
- Auto-On automatic extraction
- 1 combiZone



### iQ 300

### Frameless

- 4 individual zones
- 17 hob power levels
- 3 + 1 Intensive hood power levels
- powerBoost
- Auto-On automatic extraction
- 1 combiZone

# inductionAir Plus hobs





### **iQ** 500 ED851HQ26E

inductionAir Plus hob Black glass

80cm















### inductionAir Plus hob specifications

Appliance type	inductionAir plus hob			
Design family	iQ 500			
Model number	ED85	1HQ26E		
Design				
Width (mm)		802		
Control position / Control type	Front / t	touchSlider		
diamondProtect Surface				
Style	3 sided bevelle	ed frameless finish		
Key features				
Home Connect		<u>-</u>		
Integrated extractor				
cookingSensor Plus ready1				
fryingSensor Plus settings for hob  Favourite Button	- ''	levels		
Automatic extraction	Λ.	ıto-on		
Number of flexInduction zones	AL	10-011		
Number of combiZones	7·10f	ft & Right		
Hob features	2. Lei	it & Nigiit		
Number of individual zones / Power levels	4	117		
powerBoost / powerMove Plus		1/-		
panBoost		e Button a. sw upd.		
Adaptable volume / Energy consumption display		-		
Keep warm function		e Button a. sw upd.		
quickStart / Quick stop (Quick switch-off)		1-		
flexMotion / reStart	-	-1		
Demo mode				
Dish categories/setting recommendations	via HC ap	pp a. sw upd.		
Wipe protection function (Control panel pause)				
Safety features				
Residual heat indicator / Pan recognition		1		
Childproof lock / Favourite button	■/■			
Countdown timer / Count up timer	<b>■</b> 1-			
Safety time switch off / Main on/off switch		1		
Hood features				
climateControl sensor / Metal grease filter	-	-1		
Power levels		- / ■ Intensive		
Power levels Automatic intensive revert setting	9 + 2	Intensive ninutes		
Power levels Automatic intensive revert setting Automatic or manual control	9 + 2 6 m	Intensive ninutes		
Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation	9 + 2 6 m	Intensive ninutes		
Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation	9 + 2 6 m 12 / 3/	Intensive ninutes 0 minutes		
Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection	9 + 2 6 n 12 / 3( Yes - 200	Intensive ininutes on minutes unders unders unders unders under capacity		
Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector	9 + 2 6 n 12 / 30 Yes - 200 700m	Intensive ninutes ninutes minutes minutes minutes oml capacity Il capacity		
Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators	9 + 2 6 n 12 / 30 Yes - 200 700m	Intensive ininutes on minutes unders unders unders unders under capacity		
Power levels  Automatic intensive revert setting  Automatic or manual control  Automatic after running: Extraction / Recirculation  Interval operation  Dishwasher safe grease filter cassette with spillage collection  Dishwasher safe spillage overflow collector  Electronic grease filter/cleanAir filter saturation indicators  Performance / Technical information – Hob	9 + 2 6 π 12 / 3ι Yes - 200 700m	Intensive ininutes  O minutes  mont capacity I capacity  I capacity		
Power levels  Automatic intensive revert setting  Automatic or manual control  Automatic after running: Extraction / Recirculation  Interval operation  Dishwasher safe grease filter cassette with spillage collection  Dishwasher safe spillage overflow collector  Electronic grease filter/cleanAir filter saturation indicators  Performance / Technical information – Hob  Maximum power output (W)	9 + 2 6 n 12 / 3( Yes - 200 700m	Intensive ininutes ominutes ominutes ominutes lacapacity lacapacity - / -		
Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators Performance / Technical information – Hob Maximum power output (W) Nominal voltage (V)	9 + 2 6 m 12 / 30 Yes - 200 700m 7	Intensive ninutes  0 minutes  mond capacity Il capacity - ///,400		
Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators Performance / Technical information – Hob Maximum power output (W) Nominal voltage (V) Electrical cable length (cm)	9+2 6 m 12 / 3i Yes - 200 700 m	Intensive ininutes  ominutes  months and capacity I capacity - I -  ,400 0-240 110		
Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators Performance / Technical information – Hob Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm)	9+2 6 n 12 / 3 Yes - 20( 700m 7	Intensive ininutes  multiple ini		
Power levels  Automatic intensive revert setting  Automatic or manual control  Automatic after running: Extraction / Recirculation  Interval operation  Dishwasher safe grease filter cassette with spillage collection  Dishwasher safe spillage overflow collector  Electronic grease filter/cleanAir filter saturation indicators  Performance/ Technical information – Hob  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  Rear left zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / dimensions (mm)	9 + 2 6 n 12 / 3i Yes - 200 700m 7 22 2.50	Intensive ainutes amount of the property of capacity o		
Power levels  Automatic intensive revert setting  Automatic or manual control  Automatic after running: Extraction / Recirculation  Interval operation  Dishwasher safe grease filter cassette with spillage collection  Dishwasher safe spillage overflow collector  Electronic grease filter/cleanAir filter saturation indicators  Performance / Technical information – Hob  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  Rear left zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / dimensions (mm)	9 + 2 6 n 12 / 3i Yes - 200 700m 7 22 2.50 2.50	Intensive ninutes  O minutes  O minutes  I apacity I apacity I apacity I 100 I		
Power levels  Automatic intensive revert setting  Automatic or manual control  Automatic after running: Extraction / Recirculation  Interval operation  Dishwasher safe grease filter cassette with spillage collection  Dishwasher safe spillage overflow collector  Electronic grease filter/cleanAir filter saturation indicators  Performance / Technical information – Hob  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  Rear left zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / dimensions (mm)	9 + 2 6 n 12 / 3i Yes - 200 700m 7 22 2.50	Intensive ainutes amount of the property of capacity o		
Power levels Automatic intensive revert setting Automatic or manual control Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators Performance / Technical information – Hob Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone – power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm)	9 + 2 6 n 12 / 3i Yes - 200 700m 7 22 2.50 2.50	Intensive ninutes  O minutes  O minutes  I apacity I apacity I apacity I 100 I		
Power levels Automatic intensive revert setting Automatic or manual control Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators Performance / Technical information – Hob Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm)	9+2 6 m 12 / 3i Yes - 200 700m 7 22 2.50 2.50 2.50 2.50 2.50	Intensive initiates  ominutes  ominutes  ominutes  ominutes  ominutes  il capacity  - / -  ,400  0-240  110  190 × 210  190 × 210  190 × 210  -  -  -  -  -  -  -  -  -  -  -  -  -		
Power levels Automatic intensive revert setting Automatic or manual control Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators Performance / Technical information – Hob Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone – power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm)	9 + 2 6 n 12 / 3i Yes - 200 700m 7 22 2.50 2.50	Intensive ninutes  O minutes  O minutes  I apacity I apacity - I		
Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators Performance / Technical information – Hob Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm)	9 + 2 6 n 12 / 3 Yes - 200 700m 7 22 2.50 2.50 2.50 2.50 3.60 3.60	Intensive ininutes  multiplication  multiplica		
Power levels  Automatic intensive revert setting  Automatic or manual control  Automatic after running: Extraction / Recirculation  Interval operation  Dishwasher safe grease filter cassette with spillage collection  Dishwasher safe spillage overflow collector  Electronic grease filter/cleanAir filter saturation indicators  Performance/ Technical information – Hob  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  Rear left zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / dimensions (mm)  flexInduction zone left - power (kW) / dimensions (mm)  flexInduction zone left - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)	9 + 2 6 n 12 / 3i  Yes - 200 700m 7 22 2.50 2.50 2.50 2.50 3.60 3.60 3.70	Intensive aninutes  multiple m		
Power levels  Automatic intensive revert setting  Automatic or manual control  Automatic after running: Extraction / Recirculation  Interval operation  Dishwasher safe grease filter cassette with spillage collection  Dishwasher safe spillage overflow collector  Electronic grease filter/cleanAir filter saturation indicators  Performance / Technical information – Hob  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  Rear left zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / dimensions (mm)  flexInduction zone left - power (kW) / dimensions (mm)  flexInduction zone right - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)  combiZone right - power (kW) / dimensions (mm)  Rear left zone / Rear right zone - with powerBoost (max. kW)	9 + 2 6 n 12 / 3i  Yes - 200 700m 7 22 2.50 2.50 2.50 2.50 3.60 3.60 3.70	Intensive ninutes  Intensive ninutes Intensive ninutes Intensive ninutes Intensive ninutes Intensive ninutes Intensive ninutes Intensive Intensi		
Power levels Automatic intensive revert setting Automatic or manual control Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators Performance / Technical information – Hob Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Rear right zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) Rear left zone / Rear right zone - with powerBoost (max. kW) Front left zone / Front right zone - with powerBoost (max. kW)	9 + 2 6 n 12 / 3i  Yes - 200 700m 7 22 2.50 2.50 2.50 2.50 3.60 3.60 3.70	Intensive ninutes  Intensive ninutes Intensive ninutes Intensive ninutes Intensive ninutes Intensive ninutes Intensive ninutes Intensive Intensi		
Power levels Automatic intensive revert setting Automatic or manual control Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators Performance / Technical information – Hob Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) Rear left zone / Rear right zone - with powerBoost (max. kW) Performance / Technical information – Extractor	9 + 2 6 n 12 / 3i  Yes - 200 700m 7 22 2.50 2.50 2.50 2.50 3.60 3.60 3.70	Intensive initiates  i		
Power levels Automatic intensive revert setting Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators Performance / Technical information – Hob Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone - power (kW) / dimensions (mm) Front left zone - power (kW) / dimensions (mm) Front right zone - power (kW) / dimensions (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) Rear left zone / Rear right zone - with powerBoost (max. kW) Performance / Technical information – Extractor Extractor energy efficiency rating	9+2 6 m 12 / 31 Yes - 200 700m 7 22 2.50 2.50 2.50 2.50 2.50 2.50 3.60 3.60	Intensive initiates  i		
Power levels  Automatic intensive revert setting  Automatic or manual control  Automatic after running: Extraction / Recirculation  Interval operation  Dishwasher safe grease filter cassette with spillage collection  Dishwasher safe spillage overflow collector  Electronic grease filter/cleanAir filter saturation indicators  Performance/ Technical information – Hob  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  Rear left zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / dimensions (mm)  flexInduction zone left - power (kW) / dimensions (mm)  flexInduction zone left - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)  Rear left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Performance / Technical information - Extractor  Extractor energy efficiency rating  Extraction rate in m*/h* fi.20	9+2 6 n 12/31 Yes - 200 700m 7 22 2.50 2.50 2.50 2.50 - - 3.60 3.60 3.71	Intensive ininutes  ininut		
Power levels Automatic intensive revert setting Automatic or manual control Automatic or manual control Automatic after running: Extraction / Recirculation Interval operation Dishwasher safe grease filter cassette with spillage collection Dishwasher safe spillage overflow collector Electronic grease filter/cleanAir filter saturation indicators Performance / Technical information – Hob Maximum power output (W) Nominal voltage (V) Electrical cable length (cm) Rear left zone – power (kW) / dimensions (mm) Rear right zone – power (kW) / dimensions (mm) Front left zone – power (kW) / dimensions (mm) Front right zone – power (kW) / dimensions (mm) flexInduction zone left – power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) combiZone left - power (kW) / dimensions (mm) combiZone right - power (kW) / dimensions (mm) Rear left zone / Front right zone – with powerBoost (max. kW) Front left zone / Front right zone – with powerBoost (max. kW) Performance / Technical information – Extractor Extractor energy efficiency rating Extraction rate in m*/h C+2 – ducted / recirculating power level maximum	9+2 6 n 12/31 Yes - 200 700m 7 22 2.50 2.50 2.50 2.50 - - 3.60 3.60 3.71	Intensive aninutes  On minutes  Image: Comparison of the compariso		
Power levels  Automatic intensive revert setting  Automatic or manual control  Automatic or manual control  Automatic after running: Extraction / Recirculation  Interval operation  Dishwasher safe grease filter cassette with spillage collection  Dishwasher safe spillage overflow collector  Electronic grease filter/cleanAir filter saturation indicators  Performance / Technical information – Hob  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  Rear left zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / dimensions (mm)  flexInduction zone left - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)  Rear left zone / Rear right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Performance / Technical information – Extractor  Extractor energy efficiency rating  Extraction rate in m³/h (1-2)  — ducted / recirculating power level maximum  — ducted / recirculating power level intensive	9+2 6 m 12 / 3i Yes - 200 7000m 7 22 2.50 2.50 2.50 2.50 2.50 3.60 3.70 3.71	Intensive aninutes  On minutes  Image: Comparison of the compariso		
Power levels  Automatic intensive revert setting  Automatic or manual control  Automatic or manual control  Automatic operation  Dishwasher safe grease filter cassette with spillage collection  Dishwasher safe spillage overflow collector  Electronic grease filter/cleanAir filter saturation indicators  Performance / Technical information – Hob  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  Rear left zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / dimensions (mm)  Front left zone or power (kW) / dimensions (mm)  flexInduction zone left - power (kW) / dimensions (mm)  flexInduction zone left - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)  Front left zone / Rear right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)  Front left zone / Front right zone - with powerBoost (max. kW)	9+2 6 m 12 / 3i  Yes - 20( 700m 7 22 2.50 2.50 2.50 2.50 3.60 3.60 3.7( 3.7( 50( 62:	Intensive initiates  i		
Power levels  Automatic intensive revert setting  Automatic or manual control  Automatic or manual control  Automatic after running: Extraction / Recirculation  Interval operation  Dishwasher safe grease filter cassette with spillage collection  Dishwasher safe spillage overflow collector  Electronic grease filter/cleanAir filter saturation indicators  Performance / Technical information – Hob  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  Rear left zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / dimensions (mm)  flexInduction zone left - power (kW) / dimensions (mm)  flexInduction zone left - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)  Rear left zone / Rear right zone - with powerBoost (max. kW)  Performance / Technical information – Extractor  Extractor energy efficiency rating  Extraction rate in m³/h <sup>0, 0, 0</sup> - ducted / recirculating power level maximum  - ducted / recirculating power level minimum	9+2 6 n 12 / 31  Yes - 20( 700m  7 22 2.50 2.50 2.50 2.50 3.60 3.60 3.7( 3.7( 62)	Intensive ininutes  monitoring		

■ Yes, model has this feature. - Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

1Max 3 sensors at any time; one WSP provided. 2 Air flow and noise declarations made in line with CECED Code Of Conduct. 2 Sound power measured according to EN60704–3 on largest pipe diameter. a. sw upd. = (a software update)

Data valid in this table as of April 2025. Subject to modification without prior notice.









### inductionAir Plus hob specifications

Decision plane    Decision   De	specifications						
Model number   E071190266   E081191046   E	Appliance type			induction	Air plus hobs		
Market   M							
710   802   592   592	Model number	ED71	1HQ26E	ED811BS16E		ED611BS16E	
Front local Control gues   Front local Control   Front local Con	-						
				802			
Framelors   Fram		Front / t		Front / to			
Temperature							
	Style	Frameless		Fra	meless	Fran	neless
Image   Imag							
This personne flutton							
Paper   Pape							_
Authon on Martin Company Author on Com							
Number of Interductions causes				_			
Number of commissions		Au		Au			
Number of Individual zones   New Prese		2: Lef	t & Right		1		1
Application							
Adaptable volume   Fenergy consumption display							1/-
A separate function							<u>-</u>
			·	-	-1-		1-
	-			_	-	_	
□   □   □   □   □   □   □   □   □   □							
Dish categopicalcetring recommendations   Via HC app a. sw upd.				-			
Activation function (Control panel pause)   -							
Safety features  Residual heat indicator / Pan recognition		via HC ap			-		_
	1 1		-		-		_
		_				<u> </u>	
	-						
	-			·		-	
Mode features	-	='		· ·			
Climate Control sensor / Metal grease filter			/	■/■		-/	
Power levels			·-				
Automatic intensive revert setting 6 minutes 6 minutes 6 minutes 6 minutes 12/30 minu							
Automatic or manual control  Automatic after running: Extraction / Recirculation  12 / 30 minutes  12 / 30 minutes 12 / 30 minutes 12 / 30 minutes 12 / 30 minutes 12 / 30 minutes 12 / 30 minut							
Automatic after running: Extraction / Recirculation  12 / 30 minutes  14 / 40		6 m					
Interval operation							
Dishwasher safe grease filter cassette with spillage collection  Yes - 200ml capacity  700ml capacity  7400				12/30			
Dishwasher safe spillage overflow collector   700ml capacity   700ml cap				.,			
Electronic grease filter/cleanAir filter saturation indicators							
Performance / Technical information - Hob							
Maximum power output (W)	-		-1-	-	-/-		1-
Nominal voltage (V)   220-240   22							
Sear left zone - power (kW) / dimensions (mm)   2.50   190 x 210   2.20   2.20   210   2.20   2.20   2.20   2.20   2.20   2.20   2.20   2.20   2.20   2.							
Rear left zone - power (kW) / dimensions (mm)  2.50 190 x 210 2.20 2.2							
Rear right zone - power (kW) / dimensions (mm)   2.50   190 x 210   1.80   180   1.40   145	3						
Front left zone - power (kW) / dimensions (mm)  2.50  190 x 210  2.20  190 x 210  2.20  2.20  210  2.2							
Front right zone - power (kW) / dimensions (mm)  2.50  190 x 210  2.20  210  3.60  380 x 210  3.60  3.70 /3.10  3.70 /3.70  3.70 /3.7							
flexInduction zone left - power (kW) / dimensions (mm)							
FlexInduction zone right - power (kW) / dimensions (mm)							
3.60   380 x 210   3.70	·		-	-	-	-	-
AccombiZone right - power (kW) / dimensions (mm)   3.60   380 x 210   -   -   -   -   -   -   -   -   -		-	-	-	-	-	-
Rear left zone / Rear right zone - with powerBoost (max. kW)         3.70 / 3.70         3.70 / 3.10         3.70 / 3.20           Front left zone / Front right zone - with powerBoost (max. kW)         3.70 / 3.70         3.70 / 3.70         3.70 / 3.70           Performance / Technical information – Extractor           Extractor energy efficiency rating         B         B         B           Extraction rate in m³/h (1.2)           - ducted i recirculating power level maximum         500 / 487         500 / 441         500 / 441           - ducted / recirculating power level intensive         622 / 595         622 / 595           Noise level (sound power) based on dB[A] re 1pW (1.6)           - ducted / recirculating power level minimum         42 / 41         61 / 55         61 / 55           - ducted / recirculating power level maximum         69 / 68         69 / 66         69 / 66           - ducted / recirculating power level minersive         74 / 72         74 / 72         74 / 72							380 x 210
Front left zone / Front right zone - with powerBoost (max. kW) 3.70 / 3.							-
Performance / Technical information – Extractor							
B   B   B   B   B   B   B   B   B   B		3.70	013.70	3.70	013.70	3.70	13.70
Extraction rate in m³/h (1.2)  - ducted / recirculating power level maximum 500 / 487 500 / 441 500 / 441  - ducted / recirculating power level intensive 622 / 595 622 / 595  Noise level (sound power) based on dB[A] re 1pW (1.4)  - ducted / recirculating power level minimum 42 / 41 61 / 55 61 / 55  - ducted / recirculating power level maximum 69 / 68 69 / 66 69 / 66  - ducted / recirculating power level intensive 74 / 72 74 / 72 74 / 72							
- ducted / recirculating power level maximum 500 / 487 500 / 441 500 / 441 - ducted / recirculating power level intensive 622 / 595 622 / 595 622 / 595 800 / 441 500			В		R		В
- ducted / recirculating power level intensive     622 / 595     622 / 595       Noise level (sound power) based on dB[A] re 1pW (***)     - ducted / recirculating power level minimum     42 / 41     61 / 55     61 / 55       - ducted / recirculating power level maximum     69 / 68     69 / 66     69 / 66       - ducted / recirculating power level intensive     74 / 72     74 / 72     74 / 72							
Noise level (sound power) based on dB[A] re 1pW (**.0)         42 / 41         61 / 55         61 / 55           - ducted / recirculating power level minimum         42 / 41         61 / 55         61 / 55           - ducted / recirculating power level maximum         69 / 68         69 / 66         69 / 66           - ducted / recirculating power level intensive         74 / 72         74 / 72         74 / 72							
- ducted / recirculating power level minimum     42 / 41     61 / 55     61 / 55       - ducted / recirculating power level maximum     69 / 68     69 / 66     69 / 66       - ducted / recirculating power level intensive     74 / 72     74 / 72     74 / 72		622	2 / 595	622	2 / 595	622	/ 595
- ducted / recirculating power level maximum         69 / 68         69 / 66         69 / 66           - ducted / recirculating power level intensive         74 / 72         74 / 72         74 / 72							
- ducted / recirculating power level intensive         74 / 72         74 / 72         74 / 72							
		69	9 / 68	69	9 / 66	69	1 66
Motor power (W) 170 170 170	– ducted / recirculating power level intensive						
	Motor power (W)	•	170		170	1	70


■ Yes, model has this feature. - Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup> Max 3 sensors at any time; one WSP provided. <sup>2</sup> Air flow and noise declarations made in line with CECED Code Of Conduct. <sup>3</sup> Sound power measured according to EN60704–3 on largest pipe diameter.

a. sw upd. = (a software update)

# flexInduction hob product overview

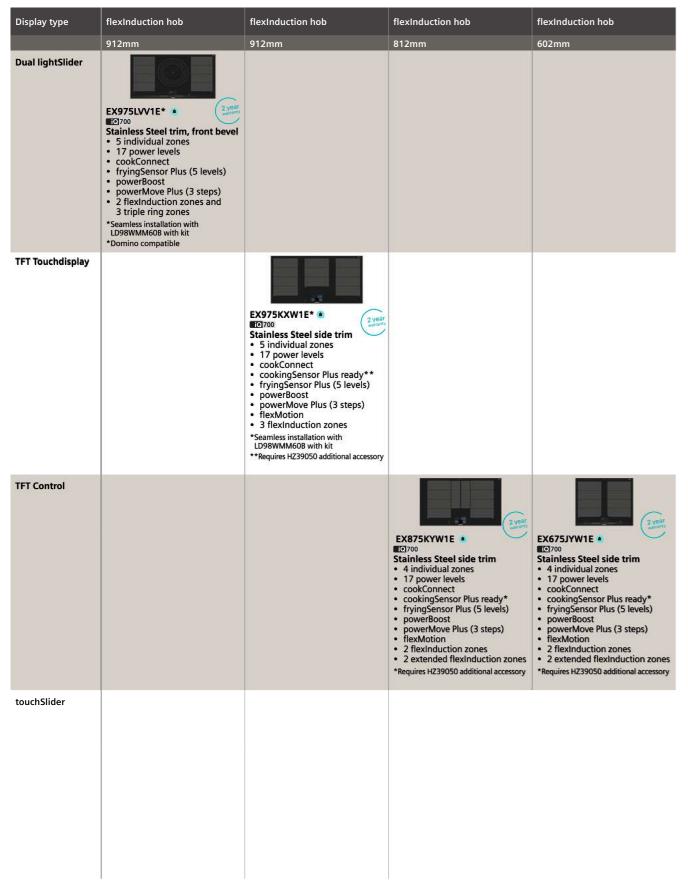






### 2 year warranty

A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.

Home Connect		warranty period.			
flexInduction hob	flexInduction hob	flexInduction hob	flexInduction hob		
912mm	802mm	602mm	592mm		
2 year warranty	2 year warranty	2 year warranty	2 year warranty		
EX275HXC1E • T0700 912mm	EX851HVC1E    ©700 802mm	EX675HXC1E <b>●</b> ■ 10700 602mm	EX651HEC1E (a)		
• 4 individual zones	U-Bevel  Individual zones	Front bevel and stainless steel side trim (Available May 2025)	U-Bevel I dindividual zones  17 appropriately  18 appropriately  18 appropriately  19 appropriately  19 appropriately  19 appropriately  19 appropriately  19 appropriately  10 appropriately  10 appropriately  10 appropriately  11 appropriately  12 appropriately  13 appropriately  15 appropriately  16 appropriately  17 appropriately  17 appropriately  17 appropriately  18 appropriately  19 appropriately  19 appropriately  10 appropriately  11 appropriately  12 appropriately  13 appropriately  14 appropriately  15 appropriately  16 appropriately  16 appropriately  17 appropriately  17 appropriately  17 appropriately  18 appropriately		
<ul><li>17 power levels</li><li>cookConnect</li><li>fryingSensor Plus (11 levels)</li></ul>	17 power levels     cookConnect     fryingSensor Plus (11 levels)	<ul><li>4 individual zones</li><li>17 power levels</li></ul>	<ul><li>17 power levels</li><li>cookConnect</li><li>fryingSensor Plus (11 levels)</li></ul>		
powerBoost     flexMotion	powerBoost     flexMotion	cookConnect     fryingSensor Plus (11 levels)	powerBoost     flexMotion		
Favourite button	1 flexInduction zone     Favourite button	<ul><li>powerBoost</li><li>flexMotion</li><li>2 flexInduction zones</li></ul>	1 flexInduction zone     Favourite button		
		Favourite button			

# Induction hob product overview

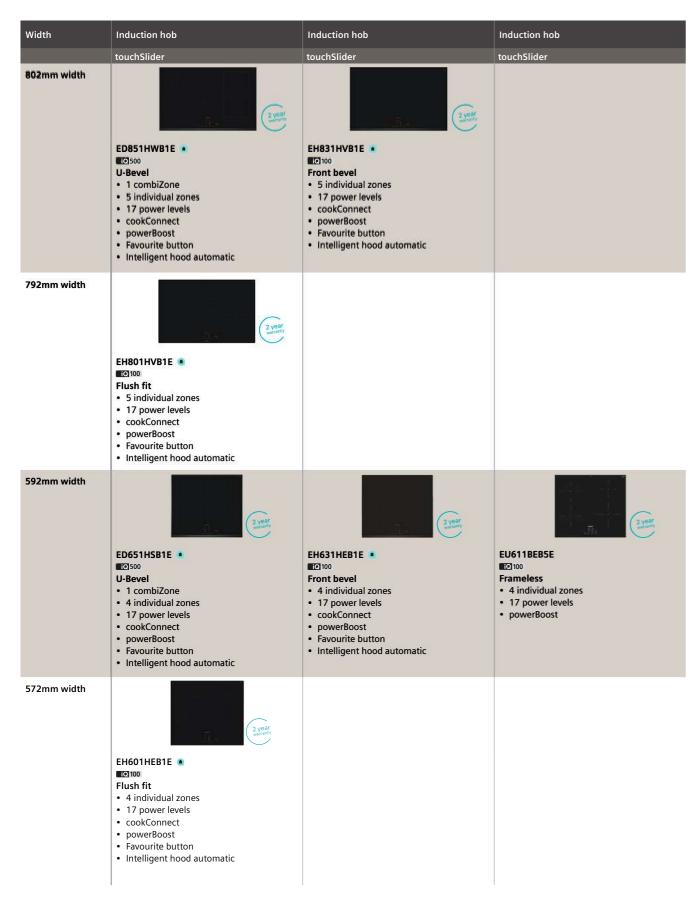





### 2 year warranty

A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.

Width	Domino induction hob
	touchSlider
302mm width	EX375FXB1E TO700 Stainless steel side trim with front bevel • 2 individual zones • 17 power levels • powerBoost





# flexInduction hobs







### iQ 700 EX975LVV1E

flexInduction hob Black glass

90cm













### flexInduction hob specifications

Appliance type		ction nob
Design family	iQ	700
Model number	EX975	SLVV1E
Design		
Width (mm)	0	12
Control position / Control type		l lightSlider
Style	Stainless steel side t	rims with front bevel
Domino compatible		
Key features		
Home Connect		
cookConnect		
cookingSensor Plus ready <sup>1</sup>		
fryingSensor Plus settings for hob	5 le	vels
Intelligent hood automatic		
Favourite button		
Number of freeInduction zones		
Extended flexInduction zone <sup>2</sup>		
Number of flexInduction zones	2 2	
	Z+3 triple	ring zone
Number of combiZones		
activeLight		
Hob features		
Number of individual zones / Power levels	5.	
powerBoost / powerMove Plus		steps
panBoost		
Adaptable volume / Energy consumption display	-	
Keep warm function		
quickStart / Quick stop (Quick switch-off)		
flexMotion		
reStart		_
Demo mode		
Dish categories/setting recommendations	l	
Wipe protection function (Control panel pause)	1	
"Plug&Play" with GB plug		
Safety features		
Residual heat indicator / Pan recognition	_	1
Childproof lock / Safety time switch off		1
Pause function		
Countdown timer (Timer with automatic switch off for each zone)		
Count up timer		
Main on/off switch		
Performance / Technical information		
Maximum power output (W)		100
Nominal voltage (V)	220	-240
Electrical cable length (cm)	1	
freeInduction zone - power (kW) / dimensions (mm)	_	
Rear left flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 230
	-	
Rear left zone - power (kW) / diameter (mm)		200
Rear right flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 230
Rear right zone - power (kW) / diameter (mm)	-	
Rear centre zone - power (kW) / diameter (mm)	2.20	200 x 230
Front centre zone - power (kW) / diameter (mm)	-	
Front left flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 230
Front left zone - power (kW) / diameter (mm)	2.20	200 X 230
	-	
Front right flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 230
Front right zone - power (kW) / diameter (mm)	-	
flexInduction zone left - power (kW) / dimensions (mm)	3.30	400 x 230
flexInduction zone right - power (kW) / dimensions (mm)	3.30	400 x 230
Extended flexInduction rear left - power (kW) / dimensions (mm)		
	-	
Extended flexInduction rear right - power (kW) / dimensions (mm)	-	
combiZone left - power (kW) / dimensions (mm)	-	
combiZone right - power (kW) / dimensions (mm)		
combiZone right - power (kW) / dimensions (mm) freeInduction zone right - powerBoost (max. kW)		
freeInduction zone right - powerBoost (max. kW)	3.70	- 13.70
freeInduction zone right - powerBoost (max. kW)  Rear left zone / Rear right zone - with powerBoost (max. kW)		- / 3.70 70
freeInduction zone right - powerBoost (max. kW)	3.	-   3.70   70   3.70

■ Yes, model has this feature. — Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

'Max 3 Sensors at any time. 'Ready' identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

'On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

Data valid in this table as of April 2025. Subject to modification without prior notice.













### flexInduction hob specifications

Appliance type			flexindu	iction hobs			
Design family	iQ	700	i	700	ic	700	
Model number	EX975KXW1E		EX87	5KYW1E	EX675JYW1E		
Design							
Nidth (mm)	9	12	812		602		
Control position / Control type	Front / TFT touchDisplay		Front / T	FT Control	Front / T	FT Control	
Style	Stainless steel side trim		Stainless s	teel side trim	Stainless st	teel side trim	
Domino compatible		-		-		_	
Key features							
Home Connect							
cookConnect							
cookingSensor Plus ready <sup>1</sup>		0 required		60 required	HZ3905	0 required	
fryingSensor Plus settings for hob		evels		levels		evels	
Intelligent hood automatic		_		_		_	
Favourite button		_		_		_	
Number of freeInduction zones		_		_		_	
Extended flexInduction zone <sup>2</sup>		_		2		2	
Number of flexInduction zones		3		2		2	
Number of combiZones		_		_		_	
activeLight		_		_		_	
Hob features							
Number of individual zones / Power levels	5	117	Δ	/ 17	4	/ 17	
powerBoost / powerMove Plus		3 steps		3 steps		3 steps	
panBoost		s steps ■		5 steps ■		s steps	
Adaptable volume / Energy consumption display				-/ <b>=</b>		<u> </u>	
Keep warm function		/ <b>=</b>		-/= =		/ =. =	
quickStart / Quick stop (Quick switch-off)							
		I <i>I</i> −	<u> </u>			I <i>1</i> −	
flexMotion		_	_				
reStart		-	<u> </u>			_	
Demo mode	•		<u> </u>		<u> </u>		
Dish categories/setting recommendations		_	_		_		
Wipe protection function (Control panel pause)			•		•		
"Plug&Play" with GB plug		-		-		_	
Safety features							
Residual heat indicator / Pan recognition	■/■			1		1	
Childproof lock / Safety time switch off	■/■			I / ■		/ ■	
Pause function		-		-			
Countdown timer (Timer with automatic switch off for each zone)	•						
Count up timer		_	_				
						-	
	i			•			
Main on/off switch Performance / Technical information							
Main on/off switch							
Main on/off switch Performance / Technical information	11,		7,	•	7,	- -	
Main on/off switch Performance / Technical information Maximum power output (W)	11,	,100	7,	,400	7, 220	400	
Main on/off switch Performance / Technical information Maximum power output (W) Nominal voltage (V) Electrical cable length (cm)	11,	,100 0-240	7,	,400 0-240	7, 220	400 0-240	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)	11, 220 1	,100 9-240	7, 22i	,400 0-240	7, 220 1	400 0-240 10	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)	11, 220 1	,100 -2-240 10 –	7, 22:	,400 0-240 110	7, 220 1	400 0-240 10	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left zone - power (kW) / diameter (mm)	11, 220 1 - 2.20	100 0-240 10 - 200 x 240	7, 22i - 2.20	,400 0-240 110 - 200 x 230	7, 220 1 - 2.20	400 0-240 10 – 190 x 230	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left zone - power (kW) / dimensions (mm)  Rear right flexInduction zone - power (kW) / dimensions (mm)	11, 220 1 - 2.20	,100 0-240 10 - 200 x 240	7, 221 - 2.20 -	,400 0-240 110 - 200 x 230	7, 220 1 - 2.20 -	400 0-240 10 - 190 x 230	
Main on/off switch Performance / Technical information Maximum power output (W) Nominal voltage (V)	11, 220 1 - 2.20 - 2.20	,100 0-240 10 - 200 x 240	7, 22; - 2,20 - 2,20	,400 0-240 110	7, 22( 1 - 2.20 - 2.20	400 0-240 10 - 190 x 230	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left zone - power (kW) / dimensions (mm)  Rear right flexInduction zone - power (kW) / dimensions (mm)  Rear right flexInduction zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / diameter (mm)	11, 220 1 - 2.20 - 2.20	,100 -240 10 - 200 x 240 - 200 x 240 200 x 240	2.20 - 2.20 - 2.20	.400 0-240 110	7, 220 1 - 2.20 - 2.20	400 	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left zone - power (kW) / diameter (mm)  Rear right flexInduction zone - power (kW) / dimensions (mm)  Rear right flexInduction zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / diameter (mm)	11, 220 1 - 2.20 - 2.20 - 2.20	100 100 10 -240 10 -200 x 240 -200 x 240 -200 x 240 -300 x 240	7, 22l - 2.20 - 2.20 -	.400 0-240 110	7, 220 1 - 2.20 - 2.20 -	400	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear right flexInduction zone - power (kW) / dimensions (mm)  Rear right flexInduction zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / diameter (mm)  Rear centre zone - power (kW) / diameter (mm)  Front centre zone - power (kW) / diameter (mm)  Front left flexInduction zone - power (kW) / diameter (mm)	11, 220 1 - 2.20 - 2.20 - 2.20 - 2.60	100 10 10 -220 × 240 -200 × 240 -200 × 240 -300 × 240 -	- 2.20 - 2.20 - 2.20 - -		7, 220 1 - 2.20 - 2.20 - - 2.20	400	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left zone - power (kW) / diameter (mm)  Rear right zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / diameter (mm)  Fear right zone - power (kW) / diameter (mm)  Front centre zone - power (kW) / diameter (mm)  Front left flexInduction zone - power (kW) / diameter (mm)  Front left flexInduction zone - power (kW) / diameter (mm)  Front left flexInduction zone - power (kW) / diameter (mm)	11, 220 1 - 2.20 - 2.20 - 2.60 - 2.20	,100 -240 10 -200 x 240 -200 x 240 -300 x 240 -200 x 240	2.20 - 2.20 - 2.20 - - - 2.20		7, 220 1 - 2.20 - 2.20 - - - 2.20	400 10 	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left zone - power (kW) / diameter (mm)  Rear right flexInduction zone - power (kW) / dimensions (mm)  Rear right flexInduction zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / diameter (mm)  Front centre zone - power (kW) / diameter (mm)  Front left flexInduction zone - power (kW) / dimensions (mm)  Front left flexInduction zone - power (kW) / dimensions (mm)  Front left flexInduction zone - power (kW) / dimensions (mm)  Front right flexInduction zone - power (kW) / dimensions (mm)	11, 220 1 - 2.20 - 2.20 - 2.60 - 2.20 - 2.20		7, 22i - 2.20 - 2.20 - 2.20 - 2.20 - 2.20 - 2.20 - 2.20	,400 10-240 110	7, 22(2) 1 - 2.20 - 2.20 - - - 2.20 - 2.20	400 -240 10 -190 x 230	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freelnduction zone - power (kW) / dimensions (mm)  Rear left flexinduction zone - power (kW) / dimensions (mm)  Rear right flexinduction zone - power (kW) / dimensions (mm)  Rear right flexinduction zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / diameter (mm)  Rear centre zone - power (kW) / diameter (mm)  Front centre zone - power (kW) / diameter (mm)  Front left flexinduction zone - power (kW) / dimensions (mm)  Front right flexinduction zone - power (kW) / dimensions (mm)  Front right flexinduction zone - power (kW) / dimensions (mm)  Front right flexinduction zone - power (kW) / dimensions (mm)  Front right flexinduction zone - power (kW) / dimensions (mm)	11, 220 1 - 2.20 - 2.20 - 2.60 - 2.20 - 2.20		7, 221 - 2,20 - 2,20 2,20 2,20 2,20 2,20 2,20 2,20 -	.400 0-240 110	7, 220 1 - 2.20 - 2.20 - 2.20 - 2.20 - 2.20 2.20 2.20 -	400 -240 10	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left flexone - power (kW) / diameter (mm)  Rear right zone - power (kW) / diameter (mm)  Rear right zone - power (kW) / diameter (mm)  Rear centre zone - power (kW) / diameter (mm)  Front Left flexInduction zone - power (kW) / dimensions (mm)  Front left flexInduction zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / diameter (mm)  Front right zone - power (kW) / diameter (mm)  Front right zone - power (kW) / diameter (mm)  Front right zone - power (kW) / diameter (mm)  flexInduction zone left - power (kW) / dimensions (mm)	11, 220 1 - 2.20 - 2.20 - 2.60 - 2.20 - 2.60 - 3.30		7, 220 - 2,20 2,20 2,20 2,20 - 3,30		7, 220 1 - 2.20 - 2.20 2.20 2.20 - 3.30	400	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freelnduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left tzone - power (kW) / diameter (mm)  Rear right flexInduction zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / diameter (mm)  Rear centre zone - power (kW) / diameter (mm)  Front Left flexInduction zone - power (kW) / dimensions (mm)  Front left flexInduction zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / diameter (mm)  Front right zone - power (kW) / diameter (mm)  front left flexInduction zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / dimensions (mm)  flexInduction zone left - power (kW) / dimensions (mm)	11, 220 1 - 2.20 - 2.20 - 2.60 - 2.20 - 2.20 - 3.30 3.30	200 x 240  400 x 240	7, 22:		7, 220 - 2.20 - 2.20 2.20 2.20 3.30 3.30	400  0-240  10	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear right flexinduction zone - power (kW) / dimensions (mm)  Rear right flexinduction zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / diameter (mm)  Rear centre zone - power (kW) / diameter (mm)  Front centre zone - power (kW) / diameter (mm)  Front left flexinduction zone - power (kW) / dimensions (mm)  Front right flexinduction zone - power (kW) / dimensions (mm)  Front right flexinduction zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / diameter (mm)  flexinduction zone left - power (kW) / dimensions (mm)  flexinduction zone right - power (kW) / dimensions (mm)  Extended flexinduction rear left - power (kW) / dimensions (mm)	11, 220 1 - 2.20 - 2.20 - 2.20 - 2.20 - 3.30 3.30	- 200 x 240 - 200	7, 220 - 2,20 - 2,20 2,20 2,20 3,30 3,30 3,30 3,30		7, 220 - 2.20 - 2.20 - 2.20 - 2.20 - 3.30 3.30 3.30	400  0-240  10	
Main on/off switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left zone - power (kW) / diameter (mm)  Rear right zone - power (kW) / diameter (mm)  Rear right zone - power (kW) / diameter (mm)  Frear right zone - power (kW) / diameter (mm)  Front tentre zone - power (kW) / diameter (mm)  Front left flexInduction zone - power (kW) / dimensions (mm)  Front left sone - power (kW) / diameter (mm)  Front right flexInduction zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / diameter (mm)  Front right zone - power (kW) / diameter (mm)  Front right zone - power (kW) / diameter (mm)  Frent zone - power (kW) / diameter (mm)	11, 220 1 - 2.20 - 2.20 - 2.20 - 2.20 - 2.20 - 3.30 3.30		2.20 - 2.20 - - 2.20 - - 2.20 - 2.20 - 3.30 3.30 3.30 3.30		7, 220 1 - 2.20 - 2.20 - 2.20 - 2.20 - 3.30 3.30 3.30 3.30 3.30	400  10	
Main onloff switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left zone - power (kW) / diameter (mm)  Rear right zone - power (kW) / diameter (mm)  Rear right zone - power (kW) / diameter (mm)  Rear right zone - power (kW) / diameter (mm)  Front centre zone - power (kW) / diameter (mm)  Front left flexInduction zone - power (kW) / dimensions (mm)  Front left flexinduction zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / diameter (mm)  Front right flexInduction zone - power (kW) / dimensions (mm)  Frest right zone - power (kW) / dimensions (mm)  Extended flexInduction raer left - power (kW) / dimensions (mm)  Extended flexInduction rear right - power (kW) / dimensions (mm)  Extended flexInduction rear right - power (kW) / dimensions (mm)	11, 220 1 - 2.20 - 2.20 - 2.20 - 2.20 - 2.20 - 3.30 3.30		7, 221  - 2,20  - 2,20  - 2,20  - 2,20  - 3,30 3,30 3,30 -	200 x 230 200 x 230 200 x 230 400 x 230 400 x 230 400 x 230 300 x 300 300 x 300	7, 220 - 2.20 - 2.20 - 2.20 - 2.20 - 3.30 3.30 3.30	400 10	
Main onloff switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / diameter (mm)  Rear right zone - power (kW) / diameter (mm)  Rear centre zone - power (kW) / diameter (mm)  Front Left flexInduction zone - power (kW) / dimensions (mm)  Front left flexInduction zone - power (kW) / dimensions (mm)  Front left zone - power (kW) / diameter (mm)  Front left zone - power (kW) / diameter (mm)  Front left zone - power (kW) / diameter (mm)  Front left zone - power (kW) / dimensions (mm)  Extended flexInduction zone left - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)	11, 220 1 - 2.20 - 2.20 - 2.60 - 2.20 - 2.20 - 3.30 3.30		2.20 - 2.20 - - 2.20 - - 2.20 - 2.20 - 3.30 3.30 3.30 3.30		7, 220  - 2.20  - 2.20  - 2.20  - 2.20  - 3.30 3.30 3.30 3.30	400	
Main onloff switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freelnduction zone - power (kW) / dimensions (mm)  Rear left flexinduction zone - power (kW) / dimensions (mm)  Rear right flexinduction zone - power (kW) / dimensions (mm)  Rear right flexinduction zone - power (kW) / dimensions (mm)  Rear right zone - power (kW) / diameter (mm)  Rear centre zone - power (kW) / diameter (mm)  Front centre zone - power (kW) / diameter (mm)  Front left flexinduction zone - power (kW) / dimensions (mm)  Front light zone - power (kW) / diameter (mm)  Front right zone - power (kW) / diameter (mm)  flexinduction zone left - power (kW) / dimensions (mm)  flexinduction zone right - power (kW) / dimensions (mm)  Extended flexinduction rear left - power (kW) / dimensions (mm)  Extended flexinduction rear right - power (kW) / dimensions (mm)  Extended flexinduction rear right - power (kW) / dimensions (mm)  Extended flexinduction rear right - power (kW) / dimensions (mm)  Extended flexinduction rear right - power (kW) / dimensions (mm)  Extended flexinduction rear right - power (kW) / dimensions (mm)  Extended flexinduction zone right - power (kW) / dimensions (mm)	11, 220 1 - 2.20 - 2.20 - 2.60 - 2.20 - 2.20 - 3.30 3.30		7, 222		7, 220  - 2.20  - 2.20  - 2.20  - 2.20  - 3.30  3.30  3.30  3.30	400 10 10 190 x 230 - 380 x 230 380 x 230 300 x 300	
Main onloff switch  Performance / Technical information  Maximum power output (W)  Nominal voltage (V)  Electrical cable length (cm)  freeInduction zone - power (kW) / dimensions (mm)  Rear left flexInduction zone - power (kW) / dimensions (mm)  Rear left zone - power (kW) / diameter (mm)  Rear right zone - power (kW) / diameter (mm)  Rear right zone - power (kW) / diameter (mm)  Rear right zone - power (kW) / diameter (mm)  Front centre zone - power (kW) / diameter (mm)  Front left flexInduction zone - power (kW) / dimensions (mm)  Front left flexinduction zone - power (kW) / dimensions (mm)  Front right zone - power (kW) / diameter (mm)  Front right flexInduction zone - power (kW) / dimensions (mm)  Frest right zone - power (kW) / dimensions (mm)  Extended flexInduction raer left - power (kW) / dimensions (mm)  Extended flexInduction rear right - power (kW) / dimensions (mm)  Extended flexInduction rear right - power (kW) / dimensions (mm)	11, 220 1 - 2.20 - 2.20 - 2.20 - 2.60 - 2.20 - 3.30 3.30 3.70		7, 222		7, 220 - 2.20 - 2.20 2.20 2.20 - 3.30 3.30 3.30 3.30 3.30 3.30 3.30	400	

■ Yes, model has this feature. - Feature not available for this model.

■ Yes, model has this feature. - Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

¹Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

²On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

Hobs | flexInduction hobs Induction hobs | Hobs

# Induction hobs











flexInduction hob specifications

Appliance type				Inducti	on hobs			
Design family	io	700	ic	700		700	i i	700
Model number		5HXC1E		1HVC1E	EX675HXC1E		EX651HEC1E	
Design	LX27	STIACIE	LX83	TITVETE	EX073HXC1E		EXBSTHECTE	
Width (mm)		112		302		602		592
Control position / Control type		ouchSlider	Front / touchSlider		Front / touchSlider		Front / touchSlider	
		trim with front bevel	3 sided bevelled frameless finish			trim with front bevel		ed frameless finish
Style	Starriess steer side	trim with front bever	3 sided beveile	u Irameiess Iinisii	Starriess steer side	trim with front bever	3 Sided Develle	eu trameiess iinisti
Domino compatible		_		_		_		_
Key features		_		_		_		_
Home Connect		_		_		_		_
cookConnect						•		
cookingSensor Plus ready <sup>1</sup>		-		-		-		-
fryingSensor Plus settings for hob		levels		levels	11	levels	11	levels
Intelligent hood automatic								
Favourite button				•				
Number of freeInduction zones		-		-		-		-
Extended flexInduction zone <sup>2</sup>		2		-		-		-
Number of flexInduction zones		-		1		2		1
Number of combiZones		-		-		-		-
activeLight		-		-		-		-
Hob features								
Number of individual zones / Power levels	4	/ 17	5	/ 17	4	/ 17	4	/ 17
powerBoost / powerMove Plus		1/-		1-		1-		1-
panBoost	via HC/Favourite	Button a. sw upd.	via HC/Favourite	Button a. sw upd.	via HC/Favourite	Button a. sw upd.	via HC/Favourite	Button a. sw upd
Adaptable volume / Energy consumption display		1/-		1/-		1/-		1/-
Keep warm function		Button a. sw upd.		Button a. sw upd.		Button a. sw upd.		Button a. sw upd
quickStart / Quick stop (Quick switch-off)		/ -		1 / -		1 / -		1 / -
flexMotion				■/-	-	■ / -	-	■/-
				<u>-                                      </u>				
reStart	-	<b>-</b>					•	
Demo mode			•		•			
Dish categories/setting recommendations	Via HC ap	p a. sw upd.	Via HC ap	p a. sw upd.	Via HC app a. sw upd.		Via HC app a. sw upd.	
Wipe protection function (Control panel pause)		-		-	_			-
"Plug&Play" with GB plug		-		-		-		-
Safety features								
Residual heat indicator / Pan recognition		/ ■		I / ■	■/■			/ =
Childproof lock / Safety time switch off		/ ■		/	■/■			/
Pause function								
Countdown timer (Timer with automatic switch off for each zone)								
Count up timer		-		-	-			-
Main on/off switch								
Performance / Technical information								
Maximum power output (W)	7.	400	7.	,400	7	,400	7	,400
Nominal voltage (V)		0-240		0-240		0-240		0-240
Electrical cable length (cm)		10		110		110		110
freeInduction zone - power (kW) / dimensions (mm)	_	_		_	_	_	_	
Rear left flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 210		_	2.20	190 x 230	2.20	190 x 230
Rear left zone - power (kW) / diameter (mm)		200 X 2 10			2.20	190 x 230		
	- 2.20		1.60	145			_	-
Rear right flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 210	2.20	200 x 210	2.20	190 x 230	1.00	-
Rear right zone - power (kW) / diameter (mm)	-	-	-	-	-	-	1.60	145
Rear centre zone - power (kW) / diameter (mm)	-	-	2.50	240	-	-	_	-
Front centre zone - power (kW) / diameter (mm)	-	-		-	-	-	_	-
Front left flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 210	-	-	2.20	190 x 230	2.20	190 x 230
Front left zone - power (kW) / diameter (mm)	-	-	2.00	180	-	-	-	-
Front right flexInduction zone - power (kW) / dimensions (mm)	2.20	200 x 210	2.20	200 x 210	2.20	190 x 230	-	-
Front right zone - power (kW) / diameter (mm)	-	-	-	-	-	-	2.50	210
6 . I . I . I	3.30	400 x 210	-	-	3.30	380 x 230	3.30	380 x 230
flexInduction zone left - power (kW) / dimensions (mm)	2.20	400 x 210	3.30	400 x 210	3.30	380 x 230	-	_
	3.30							_
flexInduction zone right - power (kW) / dimensions (mm)	3.30	_	_	_	3.30	380 x 230	-	
flexInduction zone right - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)		-	-	-	3.30	380 x 230 380 x 230	-	_
flexinduction zone right - power (kW) / dimensions (mm)  Extended flexinduction rear left - power (kW) / dimensions (mm)  Extended flexinduction rear right - power (kW) / dimensions (mm)	-				3.30	380 x 230		-
flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)  Extended flexInduction rear right - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)  combiZone right - power (kW) / dimensions (mm)	-	-	-	-			-	
flexInduction zone right - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)  Extended flexInduction rear right - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)  combiZone right - power (kW) / dimensions (mm)		-	-	-	3.30	380 x 230	-	-
flexInduction zone right - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)  Extended flexInduction rear right - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)  combiZone right - power (kW) / dimensions (mm)  freeInduction zone right - powerBoost (max. kW)	- - -	- - -	- - -	- - -	3.30	380 x 230 - -	- - -	-
flexinduction zone right - power (kW) / dimensions (mm)  Extended flexinduction rear left - power (kW) / dimensions (mm)  Extended flexinduction rear right - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)  combiZone right - power (kW) / dimensions (mm)  freeinduction zone right - powerBoost (max. kW)  Rear left zone / Rear right zone - with powerBoost (max. kW)	- - -	- - - - 13.70	- - - 2.20	- - - 0/3.70	3.30	380 x 230 - - - 0/3.70	- - -	0/2.20
flexInduction zone right - power (kW) / dimensions (mm)  Extended flexInduction rear left - power (kW) / dimensions (mm)  Extended flexInduction rear right - power (kW) / dimensions (mm)  combiZone left - power (kW) / dimensions (mm)  combiZone right - power (kW) / dimensions (mm)  freeInduction zone right - powerBoost (max. kW)	- - - - 3.70	- - -		- - -	3.30	380 x 230 - -	- - - 3.70	- -

### ■ Yes, model has this feature. - Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

"Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

20n 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones.

No bridge is possible to use 2 aux zones together.

a. sw upd. - a software update

Data valid in this table as of April 2025. Subject to modification without prior notice.

### **iQ 500** ED851HWB1E

Induction hob Black glass 80cm













Induction hob specifications

Appliance type	Induct	ion hob		
Design family	iQ 500			
Model number	ED851HWB1E			
Design				
Width (mm)	8	02		
Control position / Control type	Front / to	uchSlider		
Style	3 sided bevelled	l frameless finish		
Domino compatible		-		
Key features				
Home Connect	ı			
cookConnect	ı			
cookingSensor Plus ready <sup>1</sup>				
fryingSensor Plus settings for hob				
Intelligent hood automatic	ı			
Favourite button	ı			
Number of freeInduction zones				
Extended flexInduction zone <sup>2</sup>				
Number of flexInduction zones				
Number of combiZones		1		
activeLight				
Hob features				
Number of individual zones / Power levels	5 /			
powerBoost / powerMove Plus	<b>■</b> <i>I</i> –			
panBoost	via HC/Favourite Button a. sw upd.			
Adaptable volume / Energy consumption display	■1-			
Keep warm function	Via HC/Favourite Button a. sw upd			
quickStart / Quick stop (Quick switch-off)				
flexMotion				
reStart	ı			
Demo mode	ı			
Dish categories/setting recommendations				
Wipe protection function (Control panel pause)				
"Plug&Play" with GB plug				
Safety features				
Residual heat indicator / Pan recognition		I 🗀		
Childproof lock / Safety time switch off	■/■			
Pause function				
Countdown timer (Timer with automatic switch off for each zone)				
Count up timer				
Main on/off switch				
Performance / Technical information				
Maximum power output (W)	7,4	100		
Nominal voltage (V)	220	-240		
Electrical cable length (cm)	1	10		
freeInduction zone - power (kW) / dimensions (mm)	-			
Rear left flexInduction zone - power (kW) / dimensions (mm)	-			
Rear left zone - power (kW) / diameter (mm)	1.60	145		
Rear right flexInduction zone - power (kW) / dimensions (mm)	-			
Rear right zone - power (kW) / diameter (mm)	2.50	190 x 210		
Rear centre zone - power (kW) / diameter (mm)	2.50	240		

### ■ Yes, model has this feature. - Feature not available for this model

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

\*Max 3 sensors at any time. \*Ready' identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

\*On 60cm model, the single centre aux inductor can work only with either the left or right zones.

On the 80cm models, there are two aux inductors, one allocated each to the left and right zones.

No bridge is possible to use 2 aux zones together. a. sw upd. - a software update

Front centre zone - power (kW) / diameter (mm) Front left flexInduction zone - power (kW) / dimensions (mm) Front left zone - power (kW) / diameter (mm)

combiZone left - power (kW) / dimensions (mm) combiZone right - power (kW) / dimensions (mm) freeInduction zone right - powerBoost (max. kW) Rear left zone / Rear right zone - with powerBoost (max. kW) Rear centre zone - with powerBoost (max. kW) Front left zone / Front right zone - with powerBoost (max. kW)

Front right flexInduction zone - power (kW) / dimensions (mm) Front right zone - power (kW) / diameter (mm) flexInduction zone left - power (kW) / dimensions (mm) flexInduction zone right - power (kW) / dimensions (mm) Extended flexInduction rear left - power (kW) / dimensions (mm) Extended flexInduction rear right - power (kW) / dimensions (mm)























Induction hob specifications

Appliance type Induction hobs								
Design family	iQ	1500	iQ		iQ	100	iQ	100
Model number		HSB1E	EH801			HEB1E	EH831	
Design								
Width (mm)	5'	92	79	92	5	72	80	02
Control position / Control type	Front / to	uchSlider	Front / to	uchSlider	Front / to	uchSlider	Front / to	uchSlider
Style	3 sided bevelled frameless finish		Flus	h fit	Flus	h fit	Front	bevel
Domino compatible		_	-	-		-	-	-
Key features								
Home Connect	Г				ı			1
cookConnect	Г				ı			
cookingSensor Plus ready <sup>1</sup>	-	_	-	-		-	-	-
fryingSensor Plus settings for hob			-	-			-	-
Intelligent hood automatic	ı				ı			
Favourite button					ı			
Number of freeInduction zones	-	-	-	-		-	-	-
Extended flexInduction zone <sup>2</sup>	-	-	-	-		-	-	-
Number of flexInduction zones	-		-	-			-	-
Number of combiZones		1	-	-			-	-
activeLight			-			_	-	
Hob features								
Number of individual zones / Power levels	41		5/			17	5/	
powerBoost / powerMove Plus						1-		-
panBoost		Button a. sw upd.	via HC/Favourite I			Button a. sw upd.	via HC/Favourite	
Adaptable volume / Energy consumption display						1-		
Keep warm function		Button a. sw upd.	via HC/Favourite I			Button a. sw upd.	via HC/Favourite	
quickStart / Quick stop (Quick switch-off) flexMotion	•	1-	•	1-	_	1-	-	1-
reStart				<u> </u>				<u> </u>
Demo mode		<u> </u>		<u> </u>				
Dish categories/setting recommendations								
Wipe protection function (Control panel pause)			-					
"Plug&Play" with GB plug							_	
Safety features								
Residual heat indicator / Pan recognition		/ <b>=</b>		/ ■		/■		/ <b>=</b>
Childproof lock / Safety time switch off						/■		/ <b>=</b>
Pause function	ı			•				1
Countdown timer (Timer with automatic switch off for each zone)	ı				ı			
Count up timer		_	-	-		-	-	-
Main on/off switch	ı				ı			
Performance / Technical information								
Maximum power output (W)	6,9	900	7,4	100	7,4	100	7,4	100
Nominal voltage (V)	220	-240	220-	-240	220	220-240		-240
Electrical cable length (cm)	1	10	11	10	1	10	11	10
freeInduction zone - power (kW) / dimensions (mm)	-	_	-	-		-	-	-
Rear left flexInduction zone - power (kW) / dimensions (mm)	-	-	-	-		-	-	-
Rear left zone - power (kW) / diameter (mm)	2.50	190 x 210	1.60	145	2.00	180	1.60	145
Rear right flexInduction zone - power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-
Rear right zone - power (kW) / diameter (mm)	1.60	145	1.60	145	1.60	145	1.60	145
Rear centre zone - power (kW) / diameter (mm)	-	-	2.50	240	-	-	2.20	240
Front centre zone - power (kW) / diameter (mm)	_	-	-	-	_	_	-	_
Front left flexInduction zone - power (kW) / dimensions (mm)	_	_	-	-	_	_	-	
Front left zone - power (kW) / diameter (mm)	2.50	190 x 210	2.00	180	2.00	180	2.00	180
Front right flexInduction zone - power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-
Front right zone - power (kW) / diameter (mm)	2.00	180	2.50	210	2.50	210	2.50	210
flexInduction zone left - power (kW) / dimensions (mm)	_	_	-	-	_	_	-	-
flexInduction zone right - power (kW) / dimensions (mm)	-	_	-	-	_	_	-	-
Extended flexInduction rear left - power (kW) / dimensions (mm)	-	-	-	-	-	_	-	_
Extended flexInduction rear right - power (kW) / dimensions (mm)	-	- 200 - 210	-	-	_	<u> </u>	-	_
combiZone left - power (kW) / dimensions (mm)	3.60	380 x 210	-	_	<u>-</u>	_	-	_
combiZone right - power (kW) / dimensions (mm)	-	-	-	_	<del>-</del>	_	-	_
freeInduction zone right - powerBoost (max. kW)	3.70	12.20	3.30	12.20	3.10	12.20	3.20	12.20
Rear left zone / Rear right zone - with powerBoost (max. kW)  Rear centre zone - with powerBoost (max. kW)	3.70	12.20	2.20		3.10	12.20		70
Front left zone / Front right zone - with powerBoost (max. kW)	2 70	- / 3.10	3.10		2 10	- / 3.70	3.10	
rront ien zone / rront right zone - with powerBoost (max. kW)	5./0	١٠.١٥	3.107	3.70	3.10	/0	3.10	3.70

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

'Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

<sup>2</sup>On 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.

a. sw upd. - a software update

Data valid in this table as of April 2025. Subject to modification without prior notice.

















Induction hob
specifications


Design family	iQ	100	iG	100	iQ	100	iQ	100
Model number	EH631	IHEB1E	EU61	1BEB5E	EU611	IBEB5B	EU61RA	AGA5B
Design								
Width (mm)	5	92	5	592	5	92	59	92
Control position / Control type	Front / to	ouchSlider	Front / to	ouchSlider	Front / to	ouchSlider	Front / tou	uchSlider
Style		bevel		neless		neless	Frame	eless
Domino compatible		_		_		_	_	
Key features								
Home Connect				_		_	_	
cookConnect				_		_	_	
cookingSensor Plus ready <sup>1</sup>		_		_		_	_	
fryingSensor Plus settings for hob		_				_	_	
Intelligent hood automatic				_		_	_	
Favourite button						_		
Number of freeInduction zones		_					_	
		-				_	_	
Extended flexInduction zone <sup>2</sup>		-		_		-	-	
Number of flexInduction zones		-		_		-	-	-
Number of combiZones		-		_		-	_	-
activeLight		-		_		_	_	-
Hob features								
Number of individual zones / Power levels		17		/ 17		17	4/	
powerBoost / powerMove Plus		1-		1/-		1 –	Rear left	only / –
panBoost		Button a. sw upd.		_		_		-
Adaptable volume / Energy consumption display		1-		1-	-	I–	-1	! —
Keep warm function	via HC/Favourite	Button a. sw upd.		_		-	-	-
quickStart / Quick stop (Quick switch-off)	•	1-	■/■			/ ■	■ / ■	
flexMotion		-	-		-		-	
reStart							-	-
Demo mode	ı		-			_	-	
Dish categories/setting recommendations	-		-		-		-	
Wipe protection function (Control panel pause)		-	-		-		-	
"Plug&Play" with GB plug		_	-					
Safety features					ĺ			
Residual heat indicator / Pan recognition		/ ■	■/■		■/■		■/■	
Childproof lock / Safety time switch off		/ ■	■/■		■/■		■/■	
Pause function	1		-			_	_	
Countdown timer (Timer with automatic switch off for each zone)				•		1	_	
Count up timer		_	-			_	_	
Main on/off switch						1		
Performance / Technical information				_		_	_	_
Maximum power output (W)	7.	400	4	600	3.	700	3,7	700
Nominal voltage (V)		-240		0-240		-240	220-	
Electrical cable length (cm)		10	110			10	110	
freeInduction zone - power (kW) / dimensions (mm)		-		-		-	-	
		_				_	_	
Rear left flexInduction zone - power (kW) / dimensions (mm)	2.00	180	1.80	180		180	1.80	180
Rear left zone - power (kW) / diameter (mm)					1.80			
Rear right flexInduction zone - power (kW) / dimensions (mm)	1.00	- 145	1.40	- 145	1.40	- 145	- 1.40	- 145
Rear right zone - power (kW) / diameter (mm)	1.60	145	1.40	145	1.40	145	1.40	145
Rear centre zone - power (kW) / diameter (mm)	-	-	-	-	-	-	-	-
Front centre zone - power (kW) / diameter (mm)	-	-	-	-	-	-	-	-
Front left flexInduction zone - power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-
Front left zone - power (kW) / diameter (mm)	2.00	180	1.80	180	1.80	180	1.40	145
Front right flexInduction zone - power (kW) / dimensions (mm)	_	-	_	-	-	-	-	-
Front right zone - power (kW) / diameter (mm)	2.50	210	2.20	210	2.20	210	1.80	180
flexInduction zone left - power (kW) / dimensions (mm)		-	-	-	-	-	-	-
flexInduction zone right - power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-
Extended flexInduction rear left - power (kW) / dimensions (mm)	_	-	-	-	-	-	-	_
Extended flexInduction rear right - power (kW) / dimensions (mm)		-	-	-	-	_	-	-
combiZone left - power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-
combiZone right - power (kW) / dimensions (mm)	-	-	-	-	-	-	-	-
freeInduction zone right - powerBoost (max. kW)		_		_		-	_	_
Rear left zone / Rear right zone - with powerBoost (max. kW)	3.10	12.20	3.10	12.20	3.10	12.20	3.10	0/-
		_		-		_	_	
Rear centre zone - with powerBoost (max. kW)								

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

¹Max 3 sensors at any time. "Ready" identifies products with feature enabled, sensor available as additional purchase. If sensor is supplied, number supplied is detailed.

20n 60cm model, the single centre aux inductor can work only with either the left or right zones. On the 80cm models, there are two aux inductors, one allocated each to the left and right zones. No bridge is possible to use 2 aux zones together.


# quickLite ceramic hob product overview

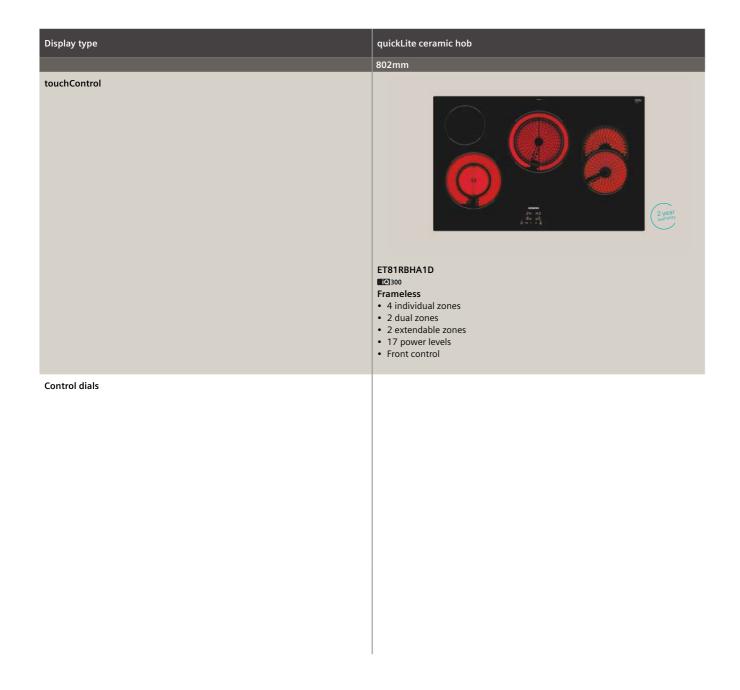




### 2 year warranty

A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this warranty period.

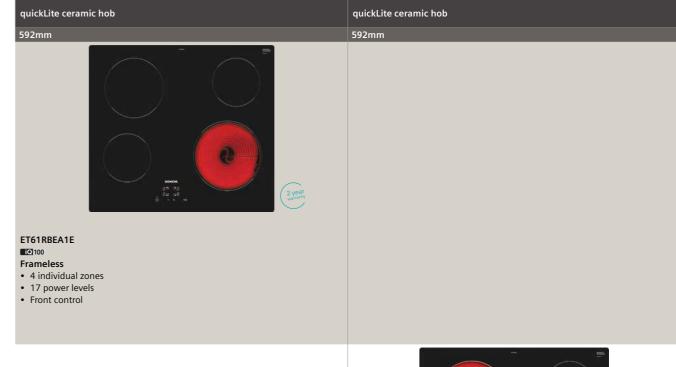



### 2 year warranty

### ET61RCEA1E

### Frameless

- 4 individual zones
- 9 power levels
- Side control

# quickLite ceramic hobs






### iQ300 ET81RBHA1D

Ceramic hob Black glass

80cm









### quickLite ceramic hob specifications

Appliance type	quickLite ceramic hob			
Design family		300		
Model number	ET81RBHA1D			
Design				
Width (mm)		02		
Control position		ont		
Control type		Control		
Style	Fran	neless		
Key features				
Number of individual zones		4		
Number of dual zones		2		
Number of extendable zones		2		
powerBoost				
Power levels	1			
Digital display	1			
Quick Stop (Quick switch-off)	1			
Restart function	ı			
Energy consumption display				
Demo Mode	1			
Keep warm function	_			
"Plug&Play" with GB Plug	-			
Wipe protection function	_			
Safety features				
Residual heat indicator	1			
Childproof lock				
Timed safety switch off	1			
Countdown timer				
Count up timer				
Main on/off switch				
Performance / Technical information				
Maximum power output (W)	7.4	400		
Nominal voltage (V)	220	-240		
Electrical cable length (cm)				
Rear left zone – power (kW) / diameter (mm)	1.20	145		
Rear right zone – power (kW) / diameter (mm)	_			
Rear centre zone – power (kW) / diameter (mm)	1.50	180 (230)		
Front left zone – power (kW) / diameter (mm)	0.75	120 (210)		
Front right zone – power (kW) / diameter (mm)	1.80	170 (265)		
Rear left zone dual-power – power (kW) / diameter (mm)	-	-		
Rear right zone dual-power – power (kW) / diameter (mm)				
Rear centre zone dual-power – power (kW) / diameter (mm)	2.40	230		
Front left zone dual-power – power (kW) / diameter (mm)	2.20	210		
Front right zone dual-power – power (kW) / diameter (mm)	2.60	265		
Optional accessories				
Wireless Meatprobe		WA00		
Cast iron non-stick frying pan		E280		
Set of three pans	HZ99	SE030		

Yes, model has this feature. – Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption. Data valid in this table as of April 2025. Subject to modification without prior notice.







## quickLite ceramic hob


ppliance type		·	ceramic hob		
Design family	iQ		iQ		
Model number	ET61R	BEA1E	ET61R	CEA1E	
esign					
Vidth (mm)		92		592	
Control position		ont	Sie		
Control type		Control	Contro		
Style	Fram	neless	Fram	eless	
Key features					
Number of individual zones		4	4		
Number of dual zones		-	-		
Number of extendable zones		-	-		
powerBoost		-	-		
Power levels		7	9		
Digital display		• •	-		
Quick Stop (Quick switch-off)		_	-		
Restart function			-		
Energy consumption display	·		-		
Demo Mode					
Keep warm function		-	-		
'Plug&Play" with GB Plug			-		
Wipe protection function		-	-		
Safety features		_	_		
Residual heat indicator					
Childproof lock			-		
Timed safety switch off		-	-		
Countdown timer	-		-		
Count up timer	•		-		
Main on/off switch		•	-		
Performance / Technical information				••	
Maximum power output (W)		500	6,600		
Nominal voltage (V)	220	-240	220-240		
Electrical cable length (cm)		-	-		
Rear left zone – power (kW) / diameter (mm)	2.00	180	2.20	210	
Rear right zone – power (kW) / diameter (mm)	1.20	145	1.20	145	
Rear centre zone – power (kW) / diameter (mm)	-	-	- 4.20	-	
Front left zone – power (kW) / diameter (mm)	1.20	145	1.20	145	
Front right zone – power (kW) / diameter (mm)	2.20	210	2.00	180	
Rear left zone dual-power – power (kW) / diameter (mm)	-	-	-		
Rear right zone dual-power – power (kW) / diameter (mm)	-	-	-	-	
Rear centre zone dual-power – power (kW) / diameter (mm)	-	-	-		
Front left zone dual-power – power (kW) / diameter (mm)	-	-	-		
Front right zone dual-power – power (kW) / diameter (mm)	-	-	-	-	
Optional accessories		14400		****	
Wireless Meatprobe		WA00	HZ32WA00		
Cast iron non-stick frying pan	HZ9FE280 HZ9SE030		- HZ9SE030		


■ Yes, model has this feature. - Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption. Data valid in this table as of April 2025. Subject to modification without prior notice.

# Hob technical diagrams

### inductionAir Plus venting hobs ED851HQ26E and ED811BS16E




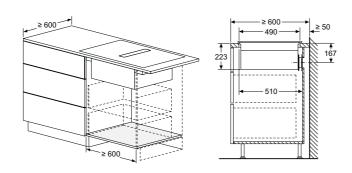


Ducted and unducted ventiliation technical diagrams can be found online

- must withstand loads of approx. 60kg; suitable substructures must be used if required.
- D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.

### inductionAir Plus venting hob ED711HQ26E




- A: Minimum distance from
- the hob cut-out to the wall. B: Recessing depth.
- C: The worktop into which the hob is installed must withstand loads of approx. 60kg; suitable substructures must be used if required.
- D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.

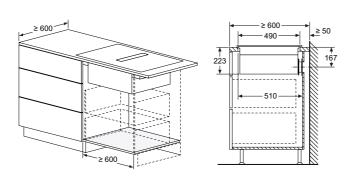


Ducted and unducted ventiliation technical diagrams can be found online

### inductionAir Plus venting hob ED611BS16E




- A: Minimum distance from the hob cut-out to the wall. B: Recessing depth
- C: The worktop into which the hob is installed
- must withstand loads of approx. 60kg; suitable substructures must be used if required.

  D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.

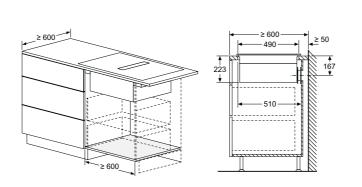

Ducted and unducted ventiliation technical diagrams can be found online

### flexInduction hobs EX975LVV1E and EX975KXW1E




- A: Minimum distance from the hob cut-out to the wall.
   B: Recessed depth
   C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

### flexInduction hob EX875KYW1E




- A: Minimum distance from the hob cut-out to the wall.
   B: Recessed depth
   C: The clearance between the surface of the control of t
- worktop and the top of the front of the oven must be 30 mm. See space

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if

D	Е	F	
ט	_	Г	
585-600	50	≥ 35	
. 000		- 50	

### flexInduction hobs EX675JYW1E and EX675HXC1E



- A: Minimum distance from the hob cut-out to the wall.
- to the Wall.


  B: Recessed depth

  C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used

D	Е	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50


### flexInduction hob EX275HXC1E




- B: Min. distance from the hob cut-out to
- C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm
- See space requirements for the oven

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if

### flexInduction hob EX851HVC1E



### flexInduction hobs EX651HEC1E



- A: Recessed depth
- B: Min. distance from the hob cut-out to
- C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm

See space requirements for the oven

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if

D	E	F	
85-600	50	≥ 35	
> 600	> 50	> 50	

# Hob technical diagrams


See space requirements for the over

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if


### Induction hobs ED851HWB1E and EH831HVB1E

# A: Recessed depth B: Min. distance from the hob cut-out to ≥ 16 (**C**)

### Induction hob EH801HVB1E




### quickLite ceramic hob ET81RBHA1D




- A: Minimum distance from the hob cut-out to the wall.
- B: Recessed depth
  C: With fitted oven underneath min. 20. possibly more; see space requirements for the oven.

### quickLite hob ET61RBEA1E




- A: Minimum distance from the hob cut-out to the wall.
- B: Recessed depth C: With fitted oven underneath min. 20, possibly more; see space requirements for the oven.


### Induction hob EH601HEB1E



### Induction hobs ED651HSB1E and EH631HEB1E




### quickLite ceramic hob ET61RCEA1E



- A: Minimum distance from the hob cut-out
- to the wall.
- B: Recessed depth
  C: With fitted oven underneath min. 20, possibly more; see space requirements for the oven.

### **Induction hobs** EU611BEB5E and EU611BEB5B




- A: Minimum distance from the hob cut-out to the wall.
   B: Recessed depth
   C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

### **Induction hob** EU61RAGA5B



- A: Minimum distance from the hob cut-out to the wall.
   B: Recessed depth
- C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.


The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used


D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50


### For all flexInduction, induction and quickLite ceramic hobs

Below are diagrams for installation applicable to all flexInduction, induction and quickLite ceramic hobs

\*dimension varies according to model example show for a 90cm hob. Please refer to the line drawing of the particular model for exact specification.









### Easy clean up

Cleaning up is also quick and easy thanks to the tempered glass surface and detachable metallic sword dials, which can simply be removed to wipe the hob surface. The semicontinuous cast iron pan supports are also dishwasher suitable and sized to fit comfortably in the dishwasher loading zone.







Detachable sword dials for ultimate convenience For quick and easy clean up with no hard to reach areas.



Dishwasher safe pan supports Our light and durable

semi-continuous cast iron pan supports, combine excellent pan stability with easy cleaning as they can be placed in the dishwasher.



### Designed for modern living

The iQ700 gas hob expertly balances flame cooking with modern precision, the hallmark of every Siemens home appliance. The digital display, together with the soft blue glow of the LED-illuminated dials, provides a stylish and functional accent to the sleek black tempered glass surface.

### High performance, high speed.

Say hello to the next generation of gas hobs – designed for this generation of flame-cooking perfectionists. With nine precise heat levels, intelligent connectivity features (iQ700 ER9A6SH40 only), and a sleek, modern design, the new Siemens intelligent gas hobs represents the perfect fusion of tradition and innovation.

### Unrivalled precision, from simmer to sizzle

Whether simmering a delicate sauce or searing a steak, our intelligent gas hobs deliver the precision needed to achieve excellent results, every single time. The patented stepFlame Technology ensures a consistent flame size adaption across nine distinct levels to perfectly tailor the heat to any cooking task. Illuminated dials and a digital display clearly indicates the selected heat level as well as residual heat – no more guessing or bending down to check the flame size.



### stepFlame Technology: gas cooking without the guessing

Nine incremental and precise flame settings to choose from for outstanding precision.



### Intelligently connected

The iQ700 gas hob includes hob-hood connectivity features that make cooking more seamless and intuitive. For example, the hood turns on automatically when the hob is activated, and the hood's light and power level can easily be adjusted.

For added peace of mind, the status of the hob can be check on from anywhere via the Siemens Home Appliance App.



## Intelligent hood automatic: intelligently connected for ultimate control

The hood adjusts its fan level to match the size of the flames.



### cookConnect system: control your hood from your hob

The power and lighting levels of the hood can be adjusted on the hob or via Siemens Home Appliances App.



### Siemens Home Connect: app-enabled convenience

The hob can be monitored remotely via a smartphone or tablet.



# Gas hobs product overview

Gas hob


915mm

EP9A6MI40

Control dial: Front, Black

(Available April 2025)

• 5 cooking zones

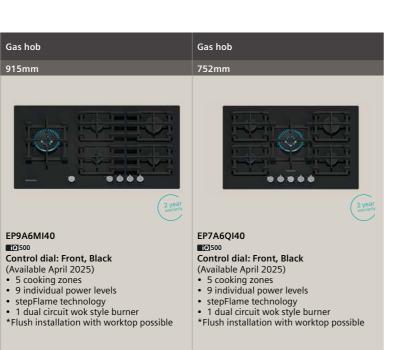



### 2 year warranty

A two year warranty is available on all Siemens hobs listed in this brochure to protect against manufacturing and material faults during this

	w w	varranty period.
Gas hob	Domino gas hob	Domino gas hob
590mm	302mm	302mm
EP6A6HI10 10 500 Control dial: Front, Black (Available April 2025) 4 cooking zones 9 individual power levels stepFlame technology *Flush installation with worktop possible		
	2 year	2 year 2 years





## iQ 700 ER3A6BI40 Control dial: Front, Black (Available May 2025) • 2 cooking zones

- 9 individual power levels stepFlame technology

- Control dial: Front, Black (Available May 2025) 1 cooking zone
- 9 individual power levels stepFlame technology
- Dual control wok burner

Design

Tempered glass

Ceramic glass

Gas hob

915mm

ER9A6SH40

Control dial: Front, Black

9 individual power levels

stepFlame technology 1 dual circuit wok style burner

\*Flush installation with worktop possible

(Available June 2025)

• 5 cooking zones

# Gas hobs








Available May 2025

### 700 ER9A6SH40

### Gas hob

Tempered glass









90cm

Appliance type	Gas hob
Design family	iQ 700
Model number	ER9A6SH40
Black	
Design	
Hob surface type	Tempered glass
Width (mm)	915
Control dial position	Front
Dial type	Illuminated detachable metallic
Control type	Touch Control (7-segment display)
Installation flush with work top possible	
Key features	
stepFlame Technology controls	
Digital power level display	
Number of dual circuit wok style burners <sup>1</sup>	1
High power (5.0kW+) wok burner <sup>2</sup>	
Dual control wok burner <sup>3</sup>	
Features	
Number of cooking zones	5
Individual power levels	 9
Cast iron pan supports (number)	3
Dishwasher safe pan supports <sup>4</sup>	-
Two piece burners	
Home Connect	
cookConnect system	
Intelligent Hood Automatic	_
Count-down Timer	
Safety features	
Ignition via control dials	
Flame failure safety device	_
Performance / Technical information	
Maximum gas power output load (A)	13,700
Nominal voltage (V)	220-240
Total connected electrical load (max. W)	2.0
Cable length (cm)	100
<del>-</del>	100
GB plug	5.00
Left burner power (kW) Front left burner power (kW)	-
· · · · · · · · · · · · · · · · · · ·	
Rear left burner power (kW)	1.75
Centre/Centre front burner power (kW)	
Centre back burner power (kW)	1.75 3.00
Rear right burner power (kW)	
Front right burner power (kW)	1.00
Right burner power (kW)	
Pre-set for natural gas	
CE Marked	

■ Yes, model has this feature. - Feature not available for this model. All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.

<sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying.

<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently.

<sup>4</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.

Data valid in this table as of April 2025. Subject to modification without prior notice.











### Gas hob specifications

Appliance type		Gas hobs	
Design family	iQ 500	iQ500	iQ 500
Model number	EP9A6MI40	EP7A6QI40	EP6A6HI10
Black		■	
Design			
Hob surface type	Tempered glass	Tempered glass	Tempered glass
Width (mm)	915	752	590
Control dial position	Front	Front	Front
Dial type	Detachable metallic	Detachable metallic	Detachable metallic
Control type	-	-	-
Installation flush with work top possible	•	•	•
Key features			
stepFlame Technology controls	<b>=</b>	•	•
Digital power level display	-	-	-
Number of dual circuit wok style burners <sup>1</sup>	1	1	-
High power (5.0kW+) wok burner <sup>2</sup>	-	-	-
Dual control wok burner <sup>3</sup>		•	•
Features			
Number of cooking zones	5	5	4
Individual power levels	9	9	9
Cast iron pan supports (number)	5	5	4
Dishwasher safe pan supports <sup>4</sup>	<b>=</b>	•	•
Two piece burners	•		•
Home Connect	-	-	-
cookConnect system	-	-	-
Intelligent Hood Automatic	-	-	-
Count-down Timer	-	-	-
Safety features			
Ignition via control dials			
Flame failure safety device		•	•
Performance / Technical information			
Maximum gas power output load (A)	11,500	11,500	8,000
Nominal voltage (V)	220-240	220-240	220-240
Total connected electrical load (max. W)	1.1	1.1	1.1
Cable length (cm)	100	100	100
GB plug	-	-	-
Left burner power (kW)	4.00	-	-
Front left burner power (kW)	-	1.00	1.75
Rear left burner power (kW)	-	1.75	1.75
Centre/Centre front burner power (kW)	1.00	4.00	-
Centre back burner power (kW)	1.75	-	-
Rear right burner power (kW)	3.00	3.00	3.50
Front right burner power (kW)	1.75	1.75	1.00
Right burner power (kW)	-	-	-
Pre-set for natural gas		•	
CE Marked	•	•	
Standard accessory			
LPG jets	28-30 / 37mbar	28-30 / 37mbar	28-30 / 37mbar
Optional accessory			
Wireless Meatprobe	HZ32WA00	HZ32WA00	HZ32WA00

■ Yes, model has this feature. - Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup>Dual circuit means standard outer flame ring plus 2nd inner flame ring.


<sup>2</sup>High power output for rapid heating – especially valuable for flash and wok frying.

<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently.


<sup>4</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.

# Hob technical diagrams


### Gas hob ER9A6SH40




### Gas hob EP9A6MI40




### flexInduction domino hob EX375FXB1E




### Gas hob EP7A6QI40




### Gas hob EP6A6HI10



### Wok domino gas hob ER3A6AI10



### Domino gas hob ER3A6BI40



# Domino hobs

### 1Q 700 EX375FXB1E

flexInduction domino hob Ceramic glass

40cm





### Domino flexInduction hob specifications

Appliance type	flexInduction d	omino hob
Design family	iQ 770	0
Model number	EX375FX	B1E
Design		
Hob surface type	Ceramic	glass
Width (mm)	302	
Control position	Front	
Control type	touchSli	der
Style	S/steel side trim wi	
Key features		
Home Connect	-	
Hob hood control	_	
perfectCook temperature sensor ready	_	
perfectFry Sensor settings		
Extended flexInduction zone		
Number of flexInduction zones	1	
Number of combiZones		
Hob features		
Number of individual zones	2	
Power Levels	17	
powerBoost		
panBoost		
MoveMode  Engreus consumption displays		
Energy consumption display		
Keep warm function		
Quick start function	-	
Restart function		
Automatic setting transfer		
Dish categories		
"Plug&Play" with GB Plug		
Wipe protection function		
Safety features		
Residual heat indicator		
Childproof lock	•	
Switch off timer		
Safety time switch off		
Countdown timer		
Count up timer		
Pan recognition		
Main on/off switch		
Performance / Technical information		
Maximum power output (W)	3,700	
Nominal voltage (V)	220-24	10
Electrical cable length (cm )	110	
Rear centre zone – power (kW) / diameter (mm)	2.20	210x200
Front centre zone – power (kW) / diameter (mm)	2.20	210x200
Middle centre zone – power (kW) / diameter (mm)	-	
Rear centre zone – with powerBoost (max. kW)	3.70	
Front centre zone – with powerBoost (max. kW)	3.70	
Middle centre zone - with powerBoost (max. kW)	-	
Optional accessories		
Wireless Meatprobe	HZ32WA00	
Connecting link for use with side trim hobs	HEZ394301	
Set of three pans	HZ9SE030	
Four piece pan set	HZ9SE040	
Six piece pan set	HZ9SE060	
Cast Iron non-stick frying pan, base diameter 185mm	HZ9FE281	
Griddle plate, approx. 40x20 cm for use with Flex Induction	HZ3905	
Teppan yaki, approx. 40x20 cm for use with Flex Induction	HZ3905	
Oval roasting dish with lid for use with induction hobs	HZ3900	
Steamer insert for use with HZ390011 roasting dish	HZ3900	
■ Vos. model has this feature. — Feature not available for thi		

■ Yes, model has this feature. – Feature not available for this model

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Dual circuit means standard outer flame ring plus 2nd inner flame ring.

High power output for rapid heating – especially valuable for flash and wok frying.

<sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently.

<sup>4</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.

<sup>5</sup>For round based pans.

Data valid in this table as of April 2025. Subject to modification without prior notice.







Domino gas hob specifications

Available	May 2025
-----------	----------

Appliance type	Wok domino gas hob	Domino gas hob
Design family	iQ 700	iQ 700
Model number	ER3A6AI10	ER3A6BI40
Stainless steel	-	_
Black		
White	-	_
Design		
Width (mm)	302	302
Control position	Front	Front
Dial type	Detachable metallic	Detachable metallic
Key features		
stepFlame Technology controls	•	•
Digital power level display	-	-
Number of dual circuit wok style burners <sup>1</sup>	1	-
High power (5.0kW+) wok burner <sup>2</sup>		-
Dual control wok burner <sup>3</sup>	•	-
Hob surface type	Ceramic glass	Ceramic glass
Features		
Number of cooking zones	1	2
Individual power levels	9	9
Cast iron pan supports (number)	1 x dishwasher safe	1 x dishwasher safe
Low profile single piece burners	•	-
Two piece burners	_	
Comfort Profile	•	
Can be combined with other models with Comfort Profile	•	
Installation flush with work top possible	_	_
Safety features		
Ignition via control dials		-
Flame failure saefty device	•	
		-
Flame failure saefty device	6,100	<b>-</b> ■ 4,750
Flame failure saefty device Performance / Technical information		_
Flame failure saefty device Performance / Technical information Maximum gas power output load (W)	6,100	4,750
Flame failure saefty device Performance / Technical information Maximum gas power output load (W) Nominal voltage (V) Total connected electrical load (max. W)	6,100 220-240	4,750 220-240
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)	6,100 220-240 1.1	4,750 220-240 1.1
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  GB plug	6,100 220-240 1.1 100	4,750 220-240 1.1 100
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  GB plug  Left burner power (kW)	6,100 220-240 1.1 100	4,750 220-240 1.1 100
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  GB plug	6,100 220-240 1.1 100 -	4,750 220-240 1.1 100 –
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  GB plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)	6,100 220-240 1.1 100 - -	4,750 220-240 1.1 100 - -
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  Be plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)  Centre/Centre front burner power (kW)	6,100 220-240 1.1 100 - - -	4,750 220-240 1.1 100 - - -
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  Be plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)  Centre/Centre front burner power (kW)  Centre back burner power (kW)	6,100 220-240 1.1 100 - - - - - - 6.00	4,750 220-240 1.1 100 - - - - - 1.75
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  Be plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)  Centre/Centre front burner power (kW)	6,100 220-240 1.1 100 - - - - - - 6.00	4,750 220-240 1.1 100 1.75 3.00
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  GB plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)  Centre/Centre front burner power (kW)  Front right burner power (kW)  Back right burner power (kW)	6,100 220-240 1.1 100 6.00 -	4,750 220-240 1.1 100 1.75 3.00
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  GB plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)  Centre/Centre front burner power (kW)  Front right burner power (kW)  Back right burner power (kW)  Back right burner power (kW)	6,100 220-240 1.1 100 6.00	4,750 220-240 1.1 100 1.75 3.00
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  GB plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)  Centre/Centre front burner power (kW)  Front right burner power (kW)  Back right burner power (kW)	6,100 220-240 1.1 100 6.00	4,750 220-240 1.1 100 1.75 3.00
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  GB plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)  Centre back burner power (kW)  Front right burner power (kW)  Front right burner power (kW)  Front right burner power (kW)  Right burner power (kW)  Pre-set for natural gas  CE Marked	6,100 220-240 1.1 100 6,00	4,750 220-240 1.1 100 1.75 3.00
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  GB plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)  Centre/Centre front burner power (kW)  Front right burner power (kW)  Front right burner power (kW)  Back right burner power (kW)  Pre-set for natural gas  CE Marked  standard accessories	6,100 220-240 1.1 100 6,00	4,750 220-240 1.1 100 1.75 3.00
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  Be plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)  Centre/Centre front burner power (kW)  Front right burner power (kW)  Back right burner power (kW)  Preset for natural gas  CE Marked  standard accessories  Wok stands	6,100 220-240 1.1 100 6.00	4,750 220-240 1.1 100 1.75 3.00 1.75
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  GB plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)  Centre/Centre front burner power (kW)  Front right burner power (kW)  Back right burner power (kW)  Pront right burner power (kW)  Pront right durner power (kW)  Back right durner power (kW)  Back right durner power (kW)  Right burner power (kW)  Pre-set for natural gas  CE Marked  standard accessories  Wok stand <sup>3</sup> LPG jets	6,100 220-240 1.1 100 6.00	4,750 220-240 1.1 100 1.75 3.00
Flame failure saefty device  Performance / Technical information  Maximum gas power output load (W)  Nominal voltage (V)  Total connected electrical load (max. W)  Cable length (cm)  Be plug  Left burner power (kW)  Front left burner power (kW)  Back left burner power (kW)  Centre/Centre front burner power (kW)  Front right burner power (kW)  Back right burner power (kW)  Preset for natural gas  CE Marked  standard accessories  Wok stands	6,100 220-240 1.1 100 6.00	4,750 220-240 1.1 100 1.75 3.00 1.75

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.

<sup>5</sup>For round based pans.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Dual circuit means standard outer flame ring plus 2nd inner flame ring.


2High power output for rapid heating – especially valuable for flash and wok frying.


<sup>&</sup>lt;sup>3</sup>Dual control means the inner and outer rings of a dual circuit burner can be controlled independently. <sup>4</sup>Pan supports can be cleaned in the dishwasher. Supports have special additional coating and hand finishing of enamel.


# Hob technical diagrams

### Domino hob combination installation


Below are diagrams showing the possible combinations for installing your Domino hob








required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc).






If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.).

Cutout dimension (X) depending on the combination see table:

Domino combination possibilities with corresponding device and cutout dimensions

Width type: 30 40 60 70 80 90 Device width: 302 392 602 710 812 912 | A B C D L X

201100 11101							
			CD	LX			
2x30		302	302	-	-	604	572
1x30, 1x40		302	392	-	-	694	662
1x30, 1x60		302	602	-	-	904	872
1x30, 1x70		302	710	-	-	1012	980
1x30, 1x80		302	812	-	-	1114	1082
1x30, 1x90		302	912	-	-	1214	1182
2x40		392	392	-	-	784	752
1x40, 1x60		392	602	-	-	994	962
1x40, 1x70		392	710	-	-	1102	1070
1x40, 1x80		392	812	-	-	1204	1172
1x40, 1x90		392	912	-	-	1304	1272
3x30		302	302	302	-	906	874
2x30, 1x40		302	302	392	-	996	964
2x30, 1x60		302	302	602	-	1206	1174
2x30, 1x70		302	302	710	-	1314	1282
2x30, 1x80		302	302	812	-	1416	1384
2x30, 1x90		302	302	912	-	1516	1484
1x30, 2x40		302	392	392	-	1086	1054
1x30, 1x40,	1x60	302	392	602	-	1296	1264
1x30, 1x40,	1x70	302	392	710	-	1404	1372
1x30, 1x40,	1x80	302	392	812	-	1506	1474
1x30, 1x40,	1x90	302	392	912	-	1606	1574
3x40		392	392	392	-	1176	1144
2x40, 1x60		392	392	602	-	1386	1354
4x30		302	302	302	302	1208	1176
3x30, 1x40		302	302	302	392	1298	1266
2x30, 2x40		302	302	392	392	1388	1356
1x30, 3x40		302	392	392	392	1478	1446



# Outstanding performance, intelligently designed

The kitchen is the heart of the home. Not only is it a place to cook, it is also a place to entertain, relax after a hard day's work, or spend time with friends and family.

Our range of hoods offer sleek designs and innovative features to elevate the kitchen. From ceiling hoods to glassdraftAir hoods, we have stylish options to suit any taste. The quiet and energy efficient motors, available on some Siemens hoods create a comfortable cooking environment.

Siemens hoods keep the kitchen space fresh, and air cleaner whilst also providing ambient lighting. Browse through intelligent ventilation solutions for all kitchen designs. Our venting hobs with inductionAir Plus combines an advanced induction hob with a high-performance extractor for even clearer views in the kitchen. See the hobs section for details on the inductionAir Plus (pages 62-63).



### Siemens hood warranties:



### 2 year warranty

A two year warranty is available on all Siemens hoods listed in this brochure to protect against manufacturing and material faults during this warranty period.

To find out more about warranty and for registration, please visit: UK: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: siemens-home.bsh-group.com/ie/customer-service/warranty

# Installation solutions for every kitchen

Worktop installation.

glassdraftAir and inductionAir Plus ventilation.



The perfect solution for keeping kitchen designs clear and with unhindered sightlines. The stylish glassdraftAir premium glass panel retracts fully into the unit when not in use. When in operation, its unique transparent design adds a subtle highlight to the kitchen, while its innovative Guided Air technology guarantees excellent performance from all cooking zones.

For seamless installation combine the LD98WMM60B glassDraft Air with the EX975KXW1E or EX975LVV1E flexInduction hobs using the LZ29WWY12 seamless installation kit.



The perfect combination of innovation and functionality. These appliances offer double the efficiency and convenience by integrating a cooktop and ventilation system into one product. Ideal for kitchens with limited space or for customers seeking a clean and unique look.



### Wall installation.

Decorative angled glass and chimney hoods.



Experience the beauty and effectiveness of Siemens' wall-mounted ventilation solutions. Our designs are not only stylish but also highly effective with a host of intelligent features. Want a ventilation solution that combines classic and contemporary elements? Explore our traditional chimney hoods.



### Integrated furniture installation.

Integrated, telescopic and canopy hoods.

Need to seamlessly integrate the hood into wall-mounted kitchen units? We offer a variety of options specifically designed for mounting inside a cupboard space. These concealed hoods are the perfect choice for achieving a sleek and modern kitchen design.











# Hood installation options

### Hood positioning.

When considering the height positioning of the cooker hood, safety and efficiency are paramount factors to consider. Setting the hood at the appropriate height ensures optimal performance and safeguards the kitchen. Clearance distances vary dependent on two things:

The type of hood – different styles of hoods can have different clearance distances – for example, some of our Siemens hoods only need a clearance of 430mm above an induction hob, whilst others require a clearance of 550mm.

The type of hob – clearance distances for installation above gas hobs are generally larger than for electric hobs due to more heat being created, thus increasing safety risks.

We always recommend that you refer to the installation manual of your specific model to make sure the correct clearance distance is being adhered to.

### Ducted or recirculated?

For optimum performance, the extractor hood should be ducted to the outside of the house, so that the extracted air is vented outside. But sometimes this is not practical, so most Siemens hoods can also operate in recirculating mode; where the air is passed through a metal filter to remove grease, and then through a carbon filter to remove odours before being directed back into the kitchen.


Although the extraction rate is usually slightly lower when using this method than ducted extraction and the carbon odour filter will need to be replaced, recirculating the air offers an energy efficient benefit; cool air is retained in the home in the summer and warm air does not vent out during winter months.

### **Ducted Ventilation**

- Extracts steam and odours
- Effective planning of ducting system required

### **Recirculated Ventilation**

- Removes over 90% of odours with cleanAir filters
- Easy to install no ducting required
- Separate recirculation kit required

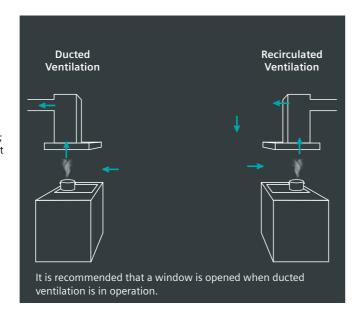

Ducting plays a crucial role in the installation of a cooker hood as it

Efficient airflow: proper ducting allows for efficient airflow, maximising the hood's performance. It ensures that the contaminated air is effectively removed from the kitchen, maintaining a fresh and clean environment.

Odour control: ducting is vital in removing cooking odours from the kitchen and venting them outside. This prevents lingering smells and helps maintain a pleasant atmosphere in the living space.

Smoke and grease removal: effective ducting helps eliminate smoke and grease particles generated during cooking. Venting these pollutants outdoors prevents them from settling on kitchen surfaces and potentially causing damage or health hazards.


Taking the following considerations into account when installing a hood and ducting system ensures optimal performance, improved air quality, and a comfortable kitchen environment:

**a. Size and length:** the duct size should match the hood's specifications to ensure proper airflow. In order to ensure optimal performance, we recommend a maximum of 5 metres of ducting, with this being reduced by a metre for each bend in the ducting

b. Material: use high-quality, non-combustible materials for ducting to ensure safety. Aluminium and galvanised steel are commonly used materials that are durable and resistant to grease build-up.

c. Routing and placement: plan the route of the ductwork carefully to minimise bends and restrictions that can impede airflow. Avoid routing ducts through insulation, ceiling joists, or other obstructive areas that may cause energy loss.

d. Exhaust outlet location: the duct should terminate outdoors, away from windows and entrances, to prevent re-entry of expelled air. Consider local building codes and regulations regarding exhaust outlet placement.

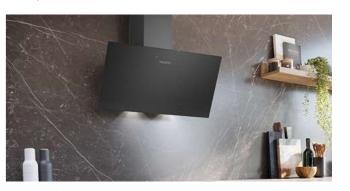


### Recirculation filters.

Standard high









performance or regenerative	FILTER	FILTER*	FILTER*
Lifetime	6-12 months	6-12 months	12 months
Benefits	Simple installation, anti-fish treatment	Increased surface area, Up to 3dB (A) sound reduction, improved extraction and performance, anti-fish treatment	Anti-pollen functionality: The filter retains 99% of airborne pollen and deactivates allergens which are retained by the filter. Increased surface area, Up to 3dB (A) sound

### LONG LIFE REGENERATIVE FILTER\*

	10

years High odour reduction, Up to 3dB (A) sound reduction, Regenerated in the oven every 4 months recommended (2 hours, 200°C), Improved extraction performance xtraction and performance

### State-of-the-art efficiency with the iQ drive motor.



Siemens hoods feature innovative technology that saves energy. This is thanks to the highly efficient, durable brushless iQdrive motor which is powerful, but requires very little energy to run. Capable of handling odours and grease in the most challenging cooking situations, and specially designed to last longer. The brushless iQdrive motor at the heart of our selected hoods is capable of extracting a measured value of up to 1007m<sup>3</sup>/h in our most powerful hood\*. \*LC91KLT60B



<sup>\*</sup>CleanAir and Regenerative filters are not available for all styles of hood. Additional module may be required to house the filter. Images for example only, different filters may come in a different size and style.

# Intelligent angled hoods, clean air and quiet moments

Our new range of iQ300 and iQ700 angled hoods and touchSlider hobs work tirelessly in the background to remove distractions, eliminate errors and enhance the cooking experience.

Designed for maximum flexibility and control, and true to the distinctive Siemens design – our intelligent hobs and hoods make cooking more intuitive by automatically adjusting to the cookware, adapting to user preferences, and automating tasks. When cooking, greasy fumes and loud noises can make it difficult to concentrate or have a conversation. The powerful, guiet and energy-efficient angled hoods allow delicious meals to be prepared, free from disturbance.



### intelligent hood automatic

The hood matches the fan level to the temperature and power of the hob, empowering consumers to cook from start to finish without ever touching the hood. Simply pairing both appliances with Siemens Home Connect allows users to benefit from this automated cooking feature. Intelligent hood automatic is available on all touchSlider induction hobs in combination with our iQ300 angled hoods.



### cookConnect system

Control the hood's power levels and lighting directly from the hob after pairing both appliances via the Siemens Home Appliances App. On top of this, once the hob is switched on, the hood will start automatically.



### **Favourite button**

The favourite button personalises the cooking experience, with just one tap. When connected via the Siemens Home Appliances App, the favourite button can be programmed to perform a chosen action. Whether it is activating a specific heat and timer setting, switching on hood lighting, or turning on other connected appliances and devices using IFTTT.



### climateControl sensor

The climateControl sensor automatically adjusts the power level of the hood depending on the level of steam and odours in the air – keeping the kitchen fresher without having to manually adjust the power. The climateControl Sensor is activated by selecting the 'auto' button.



The cooking area can be personalised depending on mood or preference with the LED Lighting Temperature. The hoods lights can be adjusted to the desirable warmth or coolness without having to sacrifice on lighting quality. An array of colour temperatures between warm white (2700k) and cool white (500k) can be selected via the hoods settings via the Siemens Home Appliances App.





### Have it your way with Siemens Home Connect.

Intelligent connectivity gives more control, support and freedom. Whether it is getting a notification when dinner is ready, lowering the heat on the hob via a smartphone or tablet, or asking the smart assistant speaker (Amazon Alexa or Google Home) to turn off the hob while the table is being set, Siemens Home Connect gives access to more flexibility and more ways to personalise the kitchen.

Some of the features displayed can be accessed only if the device is connected to a Siemens Home Connect Account and a SingleKey ID account via the Internet. Siemens Home Connect is a service of Home Connect GmbH For more information on Siemens Home Connect, visit www.home-connect.com/qb/en



### Decibel output.

60dB










\* Decibel output of iQ700 hoods on level 3.

### Accessories for recirculation.

Compatible Recirculation Kits: 10300 LC67KFN60B – 60cm			
	Accessory		
LZ11BKI16	cleanAir Plus Recirculation Kit		
LZ11BKV16	cleanAir Plus Recirculation Kit – Chimless		
Replacement Filters			
LZ11BKB16	Z11BKB16 cleanAir Plus Replacement Filter		

Compatible Recirculation Kits: 300 LC87KFN60B – 80cm			
	Accessory		
LZ11BKI16	cleanAir Plus Recirculation Kit		
LZ11BKV16	cleanAir Plus Recirculation Kit – Chimless		
Replacement Filters			
LZ11BKB16 cleanAir Plus Replacement Filter			

Compatible Recirculation Kits: TQ700 LC91KLT60B – 90cm			
	Accessory		
LZ11BKI16	cleanAir Plus Recirculation Kit		
LZ11BKV16	cleanAir Plus Recirculation Kit – Chimless		
LZ11BKS11	Long Life Recirculation Kit		
LZ11BKR11	Long Life Recirculation Kit – Chimless		
Replacement Filters			
LZ11BKB16	cleanAir Plus Replacement Filter		
LZ11BKP11	Long Life Replacement Filter		

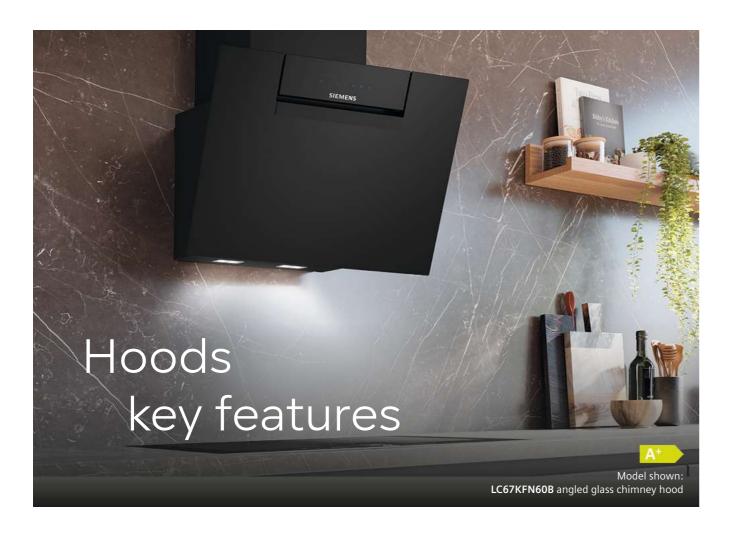

### Smart hoods make cooking a breeze.

### Siemens Home Connect


Experience a more versatile way of cooking with the Siemens Home Appliances App. Easily control the lighting, power level, and run time of the hood via a smartphone, tablet or voice assistant.

Take connected cooking a step further to control hood settings with Amazon Alexa voice control. For example, ask Alexa how to clean the filter, set the ambient lights or start extraction. All these features also work with Google Home, making it simple to control appliances in every kitchen. With the Siemens Home Appliances App, the

climateControl sensor can be activated so that the hood's extraction rate automatically adjusts depending on the level of steam and odours in the kitchen.

The cookConnect system enables connection of the hob and the hood through the Siemens Home Appliances App for more convenient control. This feature allows hood settings to be changed from the hob, so there is complete control from just one appliance.







### Lighting the way.



### LED Illumination

All Siemens hoods are equipped with state-of-the-art LED lighting, ensuring the hob is illuminated evenly and clearly.

### Controlling your hood.



### Siemens Home Connect and voice control

Activate and control connected hoods by using the Siemens Home Appliances App or via voice control with Amazon Alexa or Google Home to take the connected cooking experience to the next level.



### touchControl

The design of touchControl is integrated into the black glass panel for easy control at the touch of a button. Its sleek design is not only aesthetically pleasing but also enables easy cleaning.



### cookConnect system

Control the hood's power levels and lighting directly from the hob after pairing both appliances via the Siemens Home Appliances App. On top of this, once the hob is switched on, the hood will start automatically.



### touchSlider

Stunning design meets sleek control with touchSlider. Control Siemens hoods with ease by simply sliding a finger along the touchSlider to select the power level.



### Other product features.



### **Hood width**

Siemens offers a wide range of hoods to fit different sized spaces. For optimal results, the cooker hood should be at least as wide as the hob. Our hood widths range from 520-900mm.



The intensive setting creates a powerful boost of extraction, perfect for tackling demanding dishes such as stir fry or steamed vegetables. This ensures moisture is properly eradicated without misting windows and the kitchen air is kept fresh.

### Interval operation

With interval ventilation, the hood switches on automatically at the lowest level for 10 minutes every hour, to keep the air in the kitchen refreshed. The interval ventilation switches off after 24 hours.



### Energy efficient hoods\*

Siemens hoods feature innovations that make them incredibly energy efficient to run, from our durable and quiet brushless iQdrive motor to LED lighting.

\*For individual product energy efficiency ratings please check individual product specifications.

### Automatic after running time

This convenient feature reduces cooking odours by allowing the extractor to carry on running automatically after cooking has finished. It will run at a low speed for 3-30 minutes – the duration the extractor carries on for depends on the model.

### Filter saturation indicator system

The filter saturation indicators use an illuminated symbol on the hood to show when the hood's grease filters need to be cleaned. For hoods installed with a recirculation filter, the saturation indicator will also signal when the recirculation filter should be replaced or regenerated (depending on type of filter installed).

and install so Home App.


Partners brought to you by Siemens on alexa Home Connect.


Partners brought to you by Siemens on alexa Home Connect.

Partners brought to you by Siemens on alexa Home Connect.

Google Play Store

# Core Hoods and Venting Hobs product overview

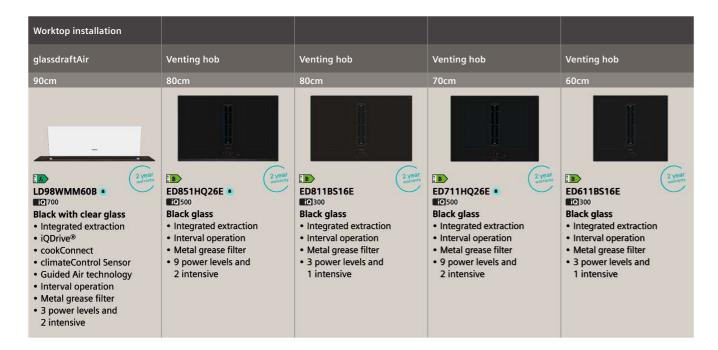

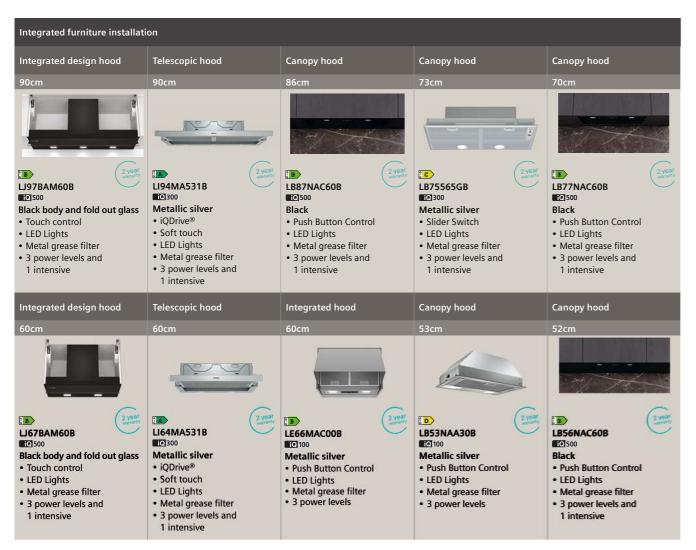






### 2 year warranty

A two year warranty is available on all Siemens hood appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.

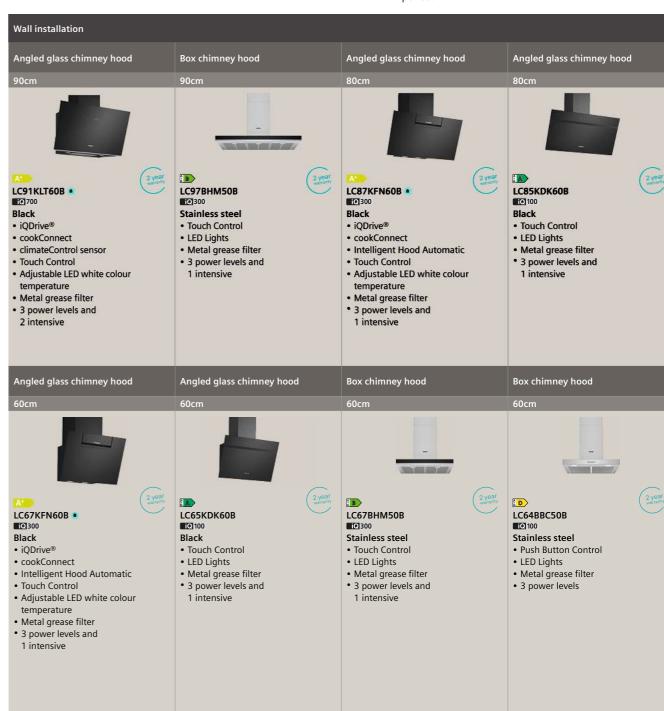



### The finishing touch for your kitchen. Now with flexible installation.

Extract cooking smells at source with the iQ700 glassdraftAir hood, ideal for keeping the sightlines of open plan kitchens. Conveniently placed within the worktop, this elegant hood can be automatically raised when needed, then disappears at the touch of a button. There is no need to worry about losing storage space beneath as the motor can be placed somewhere more convenient with the remote installation kit.

The Siemens Remote Motor Installation Mounting Kit (LZ21WWM11) frees up space under the worktop and provides the option to mount the motor up to 3 metres away from the appliance. Image for illustrative purposes only. Ducting not supplied.



Model shown: LD98WMM60B glassdraftAir hood

116

# Worktop ventilation

### iQ 700 LD98WMM60B

glassdraftAir Hood Black with clear glass















Appliance type	glassdraftAir hood
Width	90cm
Design family	iQ 700
Model number	LD98WMM60B
Colour	Black with clear glass
Key features	
Seamless installation to hob available (check compatibility)	
Home Connect	-
Guided Air	
climateControl sensor	•
cookConnect hob based hood control	
iQdrive®	•
Intensive setting / Automatic intensive revert <sup>1</sup>	■/■
Filter saturation indicator	•
Filter service position	
Features	
Suitable for ducted / recirculating operation	■/■
Power levels	3 + 2 intensive
Interval operation	•
Automatic after running (minutes)	10
Type of control	Touch control
Performance / technical information	
Energy rating	A
Appliance width (mm)	912
Extraction rate in m³/h ³.4	
- ducted / recirculating at power level 3	519 / 472
- ducted / recirculating at power level 4 or intensive setting 1	656 / 543
- ducted / recirculating, intensive setting or intensive setting 2	833 / 620
Noise level (sound power) based on dB [A] re 1pW 3,5	
- ducted / recirculating at power level 3	62 / 65
- ducted / recirculating at power level 4 or intensive setting 1	67 / 68
- ducted / recirculating, intensive setting or intensive setting 2	71 / 71
Pipe outlet diameter (mm)	150
Minimum distance above an electric / gas hob 5 (mm)	Not compatible
GB plug	•

Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>A type of recirculating kit is required if recirculating

<sup>3</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.
<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions. Data valid in this table as of April 2025. Subject to modification without prior notice.



installation options

Siemens glassdraftAir hood and hob compatibility guide			
Hood	Hob compatibilty	Seamless Installation Kit	
10700 LD98WMM60B 90cm glassdraftAir hood	700 EX975KXW1E flexInduction hob	LZ29WWY12	
10 700 LD98WMM60B 90cm glassdraftAir hood	iQ700 EX975LVV1E flexInduction hob	LZ29WWY12	

# inductionAir Plus hobs





### **iQ** 500 ED851HQ26E

inductionAir Plus hob Black glass

80cm















### inductionAir Plus hob specifications

Appliance type	induction	nAir plus hob		
Design family	iQ 500			
Model number	ED85	51HQ26E		
Design				
Width (mm)		802		
Control position / Control type	Front / touchSlider			
diamondProtect Surface				
Style	3 sided bevelle	ed frameless finish		
Key features				
Home Connect				
Integrated extractor				
cookingSensor Plus ready <sup>1</sup>				
fryingSensor Plus settings for hob	11	levels		
Favourite Button				
Automatic extraction	At	uto-on		
Number of flexInduction zones		-		
Number of combiZones	2: Le	ft & Right		
Hob features				
Number of individual zones / Power levels		‡/17 ■/-		
powerBoost / powerMove Plus panBoost		e Button a. sw upd.		
Adaptable volume / Energy consumption display		= button a. sw upu. ■ / –		
Keep warm function		e Button a. sw upd.		
quickStart / Quick stop (Quick switch-off)		I / –		
flexMotion / reStart		_, -1□		
Demo mode		<del></del>		
Dish categories/setting recommendations	via HC at	pp a. sw upd.		
Wipe protection function (Control panel pause)		-		
Safety features				
Residual heat indicator / Pan recognition		1		
Childproof lock / Favourite button				
Countdown timer / Count up timer	<b>■</b> 1-			
Safety time switch off / Main on/off switch	_/_			
Hood features				
climateControl sensor / Metal grease filter	- / <b>■</b>			
Power levels	9 + 2 Intensive			
Automatic intensive revert setting	6 minutes			
Automatic or manual control				
Automatic after running: Extraction / Recirculation	12/3	0 minutes		
Interval operation				
Dishwasher safe grease filter cassette with spillage collection		Oml capacity		
Dishwasher safe spillage overflow collector		nl capacity		
	Electronic grease filter/cleanAir filter saturation indicators -/-			
Performance / Technical information – Hob		7.400		
Maximum power output (W)		7,400 20-240		
Nominal voltage (V)	22	110		
Electrical cable length (cm)  Rear left zone - power (kW) / dimensions (mm)	2.50	190 x 210		
Rear right zone - power (kW) / dimensions (mm)	2.50 190 x 210 2.50 190 x 210			
Front left zone - power (kW) / dimensions (mm)	2.50	190 x 210		
Front right zone - power (kW) / dimensions (mm)	2.50 190 x 210			
flexInduction zone left - power (kW) / dimensions (mm)	- 190 X 210			
flexInduction zone right - power (kW) / dimensions (mm)	_			
combiZone left - power (kW) / dimensions (mm)	3.60	380 x 210		
combiZone right - power (kW) / dimensions (mm)	3.60 380 x 210			
Rear left zone / Rear right zone - with powerBoost (max. kW)		0 / 3.70		
Front left zone / Front right zone - with powerBoost (max. kW)	3.70 / 3.70			
Performance / Technical information – Extractor				
Extractor energy efficiency rating		В		
Extraction rate in m³/h (1,2)				
– ducted / recirculating power level maximum		0 / 487		
– ducted / recirculating power level intensive	62	2 / 595		
Noise level (sound power) based on dB[A] re 1pW (1,4)				
– ducted / recirculating power level minimum		2 / 41		
– ducted / recirculating power level maximum	6	9 / 68		
- ducted / recirculating power level intensive	7	4   72		
Motor power (W)	170			

■ Yes, model has this feature. - Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

1Max 3 sensors at any time; one WSP provided. 2 Air flow and noise declarations made in line with CECED Code Of Conduct. 2 Sound power measured according to EN60704–3 on largest pipe diameter. a. sw upd. = (a software update)

Data valid in this table as of April 2025. Subject to modification without prior notice.









### inductionAir Plus hob specifications

specifications	,	100				92.0
Appliance type			inductionA	ir plus hobs		
esign family	iQ	500	[Q300		[Q]300	
fodel number	ED711	HQ26E	ED811	BS16E	ED611BS16E	
esign						
fidth (mm)	71	10	8	02	592	
Control position / Control type	Front / to	uchSlider	Front / tou	ıchControl	Front / to	uchControl
liamondProtect Surface	-	-		_		
ityle	Fram	eless	Fram	eless	Fran	neless
Cey features						
lome Connect						_
ntegrated extractor			l			
ookingSensor Plus ready <sup>1</sup>	-	-		-	-	
yingSensor Plus settings for hob	11 le			-		_
avourite Button		<u> </u>		-		<u>-                                      </u>
utomatic extraction	Auto	o-on		o-On	Aut	to-On
lumber of flexInduction zones	-	-		-		-
lumber of combiZones	2: Left	& Right		1		1
ob features						
umber of individual zones / Power levels	41			17		/ 17
owerBoost / powerMove Plus			_	1 –		1/-
anBoost	via HC/Favourite I			,		
daptable volume / Energy consumption display				I -		· I –
eep warm function	via HC/Favourite I			-		
uickStart / Quick stop (Quick switch-off)	-/			<b>!</b> ■		<b>   </b>
exMotion / reStart						/ <b>=</b>
Demo mode				-		_
Dish categories/setting recommendations	via HC app	a. sw upd.		-		_
Vipe protection function (Control panel pause)	-					
afety features esidual heat indicator / Pan recognition			_	· <b>-</b>	_	
childproof lock / Favourite button			■/■		■/■	
countdown timer / Count up timer	■/■ ■/-		■ / - ■ / -		■ <i>l</i> =	
afety time switch off / Main on/off switch	■ / - ■ / ■		= / - = / =			
Hood features	_	_	_		=/	
limateControl sensor / Metal grease filter	-1		_	•	_	/ <b>=</b>
ower levels	9 + 2 intensive		3 + 1 ir			ntensive
utomatic intensive revert setting	6 minutes			nutes		inutes
automatic or manual control	6 minutes			Tutes .		<b></b>
utomatic after running: Extraction / Recirculation	12 / 30			minutes		minutes
nterval operation		I		•		•
Dishwasher safe grease filter cassette with spillage collection	Yes - 200n		Yes - 200r			ml capacity
ishwasher safe spillage overflow collector	700ml o		700ml			capacity
lectronic grease filter/cleanAir filter saturation indicators				1-		-1-
erformance / Technical information – Hob						
Maximum power output (W)	7,4	00	7,4	100	7,	400
lominal voltage (V)	220-	-240	220-240		220-240	
ectrical cable length (cm)	11			10		10
ear left zone - power (kW) / dimensions (mm)	2.50	190 x 210	2.20	190 x 210	2.20	190 x 210
ear right zone - power (kW) / dimensions (mm)	2.50	190 x 210	1.80	180	1.40	145
ont left zone - power (kW) / dimensions (mm)	2.50	190 x 210	2.20	190 x 210	2.20	190 x 210
ront right zone - power (kW) / dimensions (mm)	2.50	190 x 210	2.20	210	2.20	210
exInduction zone left - power (kW) / dimensions (mm)	-	-	-	-	-	-
exInduction zone right - power (kW) / dimensions (mm)	-	-	-	-	-	_
ombiZone left - power (kW) / dimensions (mm)	3.60	380 x 210	3.60	380 x 210	3.60	380 x 210
ombiZone right - power (kW) / dimensions (mm)	3.60	380 x 210	-	-	-	-
ear left zone / Rear right zone - with powerBoost (max. kW)	3.70	3.70	3.70	/ 3.10	3.70	1/3.20
ont left zone / Front right zone - with powerBoost (max. kW)	3.70			13.70		1/3.70
erformance / Technical information – Extractor						
tractor energy efficiency rating	E	3		В		В
ctraction rate in m³/h (1,2)						
ducted / recirculating power level maximum	500	487	500	/ 441	500	/ 441
ducted / recirculating power level intensive	622	595	622	1 595	622	1 595
oise level (sound power) based on dB[A] re 1pW (1,4)						
ducted / recirculating power level minimum	42	41	61	155	61	155
ducted / recirculating power level maximum	69	68	69	166	69	1 66
ducted / recirculating power level intensive	74	172	74	172	74	172
Motor power (W)	170		1	70	1	70

■ Yes, model has this feature. - Feature not available for this model.

All models comply with COMMISSION (EC) No. 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

<sup>1</sup> Max 3 sensors at any time; one WSP provided. <sup>2</sup> Air flow and noise declarations made in line with CECED Code Of Conduct. <sup>3</sup> Sound power measured according to EN60704–3 on largest pipe diameter.

a. sw upd. = (a software update)

# Decorative hoods







### iQ 700 LC91KLT60B

Angled glass chimney hood Black glass















Appliance type	Angled glass chimney hood
Width	90cm
Design family	iQ 700
Model number	LC91KLT60B
Colour	Black glass
Key features	
Home Connect	
Adjustable LED white colour temperature	•
climateControl sensor	•
Intelligent Hood Automatic	-
cookConnect hob based hood control	•
iQdrive	
Intensive setting / Automatic intensive revert <sup>1</sup>	■/■
Filter Saturation Indicator	
Features	
Suitable for ducted / recirculating operation	■/■
Electronic power level display	
Power levels	3 + 2 intensive
Automatic after running (minutes)	10
Lighting	2 x LED lights
Type of control	Touch control
Performance / technical information	
Energy rating	A+
Appliance width (mm)	890
Extraction rate in m³/h 3,4	
- ducted / recirculating at power level 3	441 / 435
- ducted / recirculating at power level 4 or intensive setting 1	753   752
- ducted / recirculating, intensive setting or intensive setting 2	1007 / 964
Noise level (sound power) based on dB [A] re 1pW 3,5	
- ducted / recirculating at power level 3	51 / 59
- ducted / recirculating at power level 4 or intensive setting 1	65172
- ducted / recirculating, intensive setting or intensive setting 2	70178
Pipe outlet diameter (mm)	150
Minimum distance above an electric / gas hob 6 (mm)	450 / 650
GB plug	

■ Yes, model has this feature. – Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

Angled hood

specifications

90cm

<sup>4</sup>Measured according to EN61591 on largest pipe diameter. <sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions. Data valid in this table as of April 2025. Subject to modification without prior notice.















### Angled hood specifications

Appliance type	Angled glass chimney hoods				
Width	80cm	80cm	60cm	60cm	
Design family	iQ 300	iQ 100	iQ 300	iQ 100	
Model number	LC87KFN60B	LC85KDK60B	LC67KFN60B	LC65KDK60B	
Colour	Black glass	Black glass	Black glass	Black glass	
Key features					
Home Connect	•	-		-	
Adjustable LED white colour temperature	•	_	<b>=</b>	-	
climateControl sensor	-	-	-	-	
Intelligent Hood Automatic	•	_		-	
cookConnect hob based hood control	•	-	•	-	
iQdrive	•	-	•	-	
Intensive setting / Automatic intensive revert <sup>1</sup>	■/■	■/■	■/■	■/■	
Filter Saturation Indicator	via Home Connect	-	via Home Connect	-	
Features					
Suitable for ducted / recirculating operation	■/■	■./.■	■/■	■/■	
Electronic power level display	•	•	•		
Power levels	3 + 1 intensive	3 + 1 intensive	3 + 1 intensive	3 + 1 intensive	
Automatic after running (minutes)	10	-	10	-	
Lighting	2 x LED lights	2 x LED lights	2 x LED lights	2 x LED lights	
Type of control	Touch control	Touch control	Touch control	Touch control	
Performance / technical information					
Energy rating	A+	A	A+	Α	
Appliance width (mm)	790	790	590	590	
- ducted / recirculating at power level 3	431 / 429	430 / 445	431 / 429	430 / 445	
- ducted / recirculating at power level 4 or intensive setting 1	768 / 724	550 / 550	768 / 724	550 / 550	
- ducted / recirculating, intensive setting or intensive setting 2	-1-	-1-	-1-	-1-	
Noise level (sound power) based on dB [A] re 1pW 3,5					
- ducted / recirculating at power level 3	56 / 62	60 / 69	56 / 62	60 / 69	
- ducted / recirculating at power level 4 or intensive setting 1	68 / 74	65 / 72	68 / 74	65 / 72	
- ducted / recirculating, intensive setting or intensive setting 2	-1-	-1-	-1-	-1-	
Pipe outlet diameter (mm)	150	150	150	150	
Minimum distance above an electric / gas hob <sup>6</sup> (mm)	450 / 650	450 / 650	450 / 650	450 / 650	
GB plug					

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter. <sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.


<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

# Box chimney hoods

### **iQ** 300 LC97BHM50B

Box chimney hood Stainless steel






Box chimney hood

specifications

90cm



<sup>&</sup>lt;sup>2</sup>A type of recirculating kit is required if recirculating. <sup>3</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

 ducted / recirculating at power level 4 or intensive setting 1 Pipe outlet diameter (mm) Minimum distance above an electric / gas hob <sup>6</sup> (mm)

GB plug Energy rating



Appliance type	imney hoods	
Width	60cm	60cm
Design family	iQ 300	TQ 100
Model number	LC67BHM50B	LC64BBC50B
Colour	Stainless steel	Stainless steel
Key features		
Intensive setting / Automatic intensive revert 1	■/■	-1-
Features		
Suitable for ducted / recirculating operation	■/■	■/■
Type of control	Touch control	Push button control
Power levels	3 + 1 intensive	3
Electronic power level display	•	-
Automatic after running (minutes)	-	-
Lighting	2 x LED lights	2 x LED lights
Performance / technical information		
Appliance width (mm)	600	600
Extraction rate in m³/h 3,4		
– ducted / recirculating at power level 3	459 / 404	365 / 197
ducted / recirculating at power level 4     or intensive setting 1	752 / 499	-1-
Noise level (sound power) based on dB [A] re 1pW <sup>3,5</sup>		
- ducted / recirculating at power level 3	64 / 72	63 / 66
ducted / recirculating at power level 4     or intensive setting 1	73 / 76	-1-
Pipe outlet diameter (mm)	150 / 120	150 / 120
Minimum distance above an electric / gas hob <sup>6</sup> (mm)	550 / 650	550 / 650
GB plug		
Energy rating	В	D

<sup>■</sup> Yes, model has this feature. - Feature not available for this model.

Box chimney hood

specifications

<sup>&</sup>lt;sup>4</sup>Measured according to EN61591 on largest pipe diameter.

 $<sup>{}^{\</sup>rm s}\text{Sound}$  power measured according to EN60704-3 on largest pipe diameter.

From top of pan supports. Depending on the model, a "Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

Data valid in this table as of April 2025. Subject to modification without prior notice.

<sup>&</sup>lt;sup>1</sup>Power automatically reverts back to normal setting after intensive.

<sup>&</sup>lt;sup>2</sup>A type of recirculating kit is required if recirculating. <sup>3</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>&</sup>lt;sup>4</sup>Measured according to EN61591 on largest pipe diameter.

 $<sup>^{\</sup>rm 5}\text{Sound}$  power measured according to EN60704-3 on largest pipe diameter. <sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.



# Integrated design hoods

### iQ 500 LJ97BAM60B

Integrated extractor hood Black body & fold out glass

specifications 90cm


















Appliance type	Integrated design hoods	
Width	90cm	60cm
Design family	iQ 500	iQ 500
Model number	LJ97BAM60B	∐67BAM60B
Colour	Black	Black
Special features		
Storage space	10kg each side	10kg each side
Intensive setting / Automatic intensive revert 1	■/■	■/■
Features		
Suitable for ducted / recirculating operation	<b>■</b> /■	■/■
Power levels	3 + 1 intensive	3 + 1 intensive
Lighting	2 x LED lights	2 x LED lights
Type of control	Touch control	Touch control
Performance / technical information		
Energy rating		В
Appliance width (mm)	897	597
Extraction rate in m <sup>3</sup> /h <sup>3,4</sup>		
- ducted / recirculating at power level 3	460 / 451	460 / 451
– ducted / recirculating, intensive setting 1	749 / 652	749 / 652
Noise level (sound power) based on dB [A] re 1p\		
- ducted / recirculating at power level 3	63 / 67	63 / 67
- ducted / recirculating, intensive setting 1	73 / 74	73 / 74
Pipe outlet diameter (mm)	150 / 120	150 / 120
Minimum distance above an electric / gas hob <sup>6</sup> (mm)		430 / 650
GB plug		•

 $\blacksquare$  Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

Data valid in this table as of April 2025. Subject to modification without prior notice.

Hoods | Telescopic hoods Integrated hood | Hoods

# Telescopic hoods

# Integrated hood



	2 year warranty	2 year warranty	
Telescopic hood specifications	NO.		
Appliance type		pic hoods	
Width	90cm	60cm	
Design family	iQB00	[Q]300	
Model number	LI94MA531B	LI64MA531B	
Colour	Silver metallic lacquer	Silver metallic lacquer	
Key features			
iQdrive®		•	
Intensive setting / Automatic intensive revert 1	■/ <b>■</b> /	■/■	
Features			
Suitable for ducted / recirculating operation	<b>■</b> /■	■/■	
Furniture door required		•	
Automatic after running (minutes)	10	10	
Lighting	3 x LED	2 x LED	
Controls	Soft touch	Soft touch	
Power levels	3 + 1 intensive	3 + 1 intensive	
Performance / technical information			
Energy rating	A	A	
Appliance width (mm)	898	598	
Extraction rate in m³/h ³,4			
– ducted / recirculating at power level 3	266 / 263	268 / 263	
– ducted / recirculating, intensive level 1	412 / 353	400 / 353	
Noise level (sound power) based on dB [A] re 1p	W <sup>3,5</sup>		
– ducted / recirculating at power level 3	63 / 64	62 / 64	
- ducted / recirculating, intensive level 1	70 / 68	69 / 68	
Pipe outlet diameter (mm)	150 / 120	150 / 120	
Minimum distance above an electric / gas hob <sup>6</sup> (mm)	430 / 650	430 / 650	
GB plug		•	

<sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>A type of recirculating kit is required if recirculating.

<sup>3</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

<sup>4</sup>Measured according to EN61591 on largest pipe diameter.

<sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

<sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions. Data valid in this table as of April 2025. Subject to modification without prior notice.



Integrated extractor hood Metallic silver









Integrated hood

60cm



specifications			
Appliance type	Integrated hood		
Width	60cm		
Design family	iQ 100		
Model number	LE66MAC00B		
Colour	Silver metallic lacquer		
Features			
Suitable for ducted / recirculating operation <sup>1</sup>	■/■		
Type of control	Push button control		
Power levels	3		
Lighting	2 x LED lights		
Performance / technical information			
Energy rating	В		
Appliance width (mm)	599		
Extraction rate in m <sup>3</sup> /h <sup>2,2</sup>			
- ducted / recirculating at power level 1	256 / 208		
– ducted / recirculating at power level 2	352 / 320		
– ducted / recirculating at power level 3	625 / 416		
Noise level (sound power) based on dB [A] re 1p	W <sup>2,4</sup>		
– ducted / recirculating at power level 1	49 / 57		
– ducted / recirculating at power level 2	56 / 68		
– ducted / recirculating at power level 3	70 / 75		
Pipe outlet diameter (mm)	150 / 120		
Minimum distance above an electric / gas hob 5 (mm)	500 / 650		
GB plug	•		
Optional accessories			
Standard recirculation kit	LZ10IMA00		

■ Yes, model has this feature. - Feature not available for this model.

<sup>1</sup>A type of recirculating kit is required if recirculating.
<sup>2</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.

 $^{3}\mbox{Measured}$  according to EN61591 on largest pipe diameter.

<sup>4</sup>Sound power measured according to EN60704-3 on largest pipe diameter.
<sup>5</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

# Canopy hoods


### iQ 500 LB87NAC60B

### Canopy hood Black 86cm







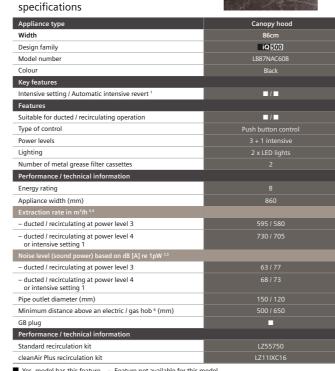

Canopy hood

- <sup>1</sup>Power automatically reverts back to normal setting after intensive. <sup>2</sup>A type of recirculating kit is required if recirculating.
- <sup>3</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.
- <sup>4</sup>Measured according to EN61591 on largest pipe diameter. <sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.
- <sup>6</sup>From top of pan supports. Depending on the model, a 'Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

Data valid in this table as of April 2025. Subject to modification without prior notice.



LZ55750





LZ55750





Canopy hood

specifications







Appliance type	Canopy hoods			
Width	70cm	73cm	52cm	53cm
Design family	IQ 500	[Q]300	iQ 500	iQ 100
Model number	LB77NAC60B	LB75565GB	LB56NAC60B	LB53NAA30B
Colour	Black	Silver metallic lacquer	Black	Silver metallic lacquer
Key features				
Intensive setting / Automatic intensive revert <sup>1</sup>	■/■	■ / -	■/■	-1-
Features				
Suitable for ducted / recirculating operation	■/■	■/■	■/■	■/■
Type of control	Push button control	Slider switch	Push button control	Push button control
Power levels	3 + 1 intensive	3 + 1 intensive	3 + 1 intensive	3
Lighting	2 x LED lights	2 x LED lights	2 x LED lights	2 x LED lights
Number of metal grease filter cassettes	2	2	1	1
Performance / technical information				
Energy rating	В	С	В	D
Appliance width (mm)	700	730	520	534
Extraction rate in m <sup>3</sup> /h <sup>3,4</sup>				
- ducted / recirculating at power level 3	595 / 580	379 / 278	570 / 560	302 / 300
ducted / recirculating at power level 4     or intensive setting 1	730 / 705	638 / 408	645 / 628	-1-
Noise level (sound power) based on dB [A] re 1pW 3,5				
- ducted / recirculating at power level 3	63 / 77	56 / 65	66 / 69	62 / 65
ducted / recirculating at power level 4     or intensive setting 1	68 / 73	68 / 72	68 / 72	-1-
Pipe outlet diameter (mm)	150 / 120	150 / 120	150 / 120	120
Minimum distance above an electric / gas hob 6 (mm)	500 / 650	650 / 650	500 / 650	550/650
GB plug	•	-	•	
Performance / technical information				

<sup>■</sup> Yes, model has this feature. - Feature not available for this model.

Standard recirculation kit

cleanAir Plus recirculation kit

<sup>&</sup>lt;sup>2</sup>A type of recirculating kit is required if recirculating.
<sup>3</sup>Air Flow and noise declarations made in line with CECED Code of Conduct.


<sup>&</sup>lt;sup>4</sup>Measured according to EN61591 on largest pipe diameter. <sup>5</sup>Sound power measured according to EN60704-3 on largest pipe diameter.

From top of pan supports. Depending on the model, a "Recirculating odour filter kit' will consist of the following items: Charcoal filter, flexible hose, air duct, fixing components, installation instructions.

# Hood technical diagrams

### glassdraftAir hood LD98WMM60B

Technical diagrams for seamless installation can be found online at siemens-home.bsh-group.com/uk






A: Installation of motor unit on front/rear or offset laterally with max. 3 m clearance

Motor unit must always be accessible


**B:** 5.5 mm



- A: ≥ 20 mm between the Guided Air suction area and a cabinet wall
- B: ≥ 60 mm for air recirculation
- ≥ 100 mm for air extraction with ducting in the plinth


  C: Motor unit must always be accessible

A: Exterior wall - U-value ≤ 0.5 W/(m<sup>2</sup>K)



B: Exterior wall - U-value > 0.5 W/(m2K)

Installation with fully laid pipework to the toe kick for poorly insulated exterior walls or above cold floors




Combination with gas hob is not possible To prevent power loss, observe the following:

- appliance Clearance of open shelf elements above the
- Clearance between appliance frame and wall min. 50 mm


### Angled chimney hood LC91KLT60B

Full technical diagrams showing the wall installation can be found online at siemens-home.bsh-group.com/uk

### Appliance in circulated air mode




### Appliance in exhaust air mode




### Angled chimney hoods LC87KFN60B

Full technical diagrams showing the wall installation can be found online at siemens-home.bsh-group.com/uk

### Appliance in circulated air mode




### Appliance in exhaust air mode




### Angled chimney hoods LC67KFN60B

Full technical diagrams showing the wall installation can be found online at siemens-home.bsh-group.com/uk

### Appliance in circulated air mode




### Appliance in exhaust air mode




### Angled chimney hoods LC85KDK60B

Full technical diagrams for showing wall installation can be found online at siemens-home.bsh-group.com/uk

### Appliance in circulated air mode






# Hood technical diagrams


### Angled chimney hoods LC65KDK60B

Full technical diagrams for showing wall installation can be found online at siemens-home.bsh-group.com/uk


# Appliance in circulated air mode 197 20–975 305 200 200 375 325 325



### Box chimney hoods LC97BHM50B

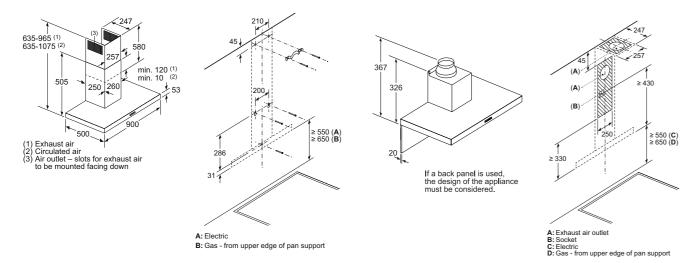


### Box chimney hoods LC67BHM50B and LC64BBC50B

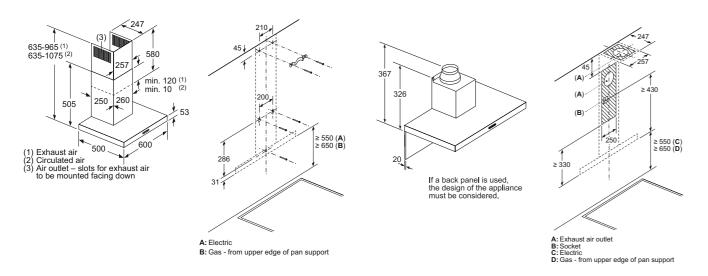


### Integrated design hood ☐97BAM60B

### Integrated design hood ☐67BAM60B

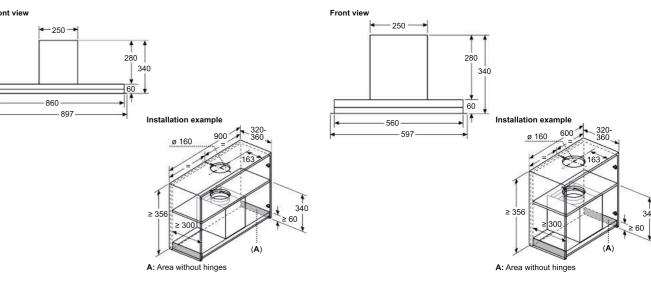


### Telescopic hood LI94MA531B

For installing the 90cm telescopic hood in a 90cm wide wall-hanging cupboard, a special wall-hanging cupboard from the kitchen unit manufacturer is required.

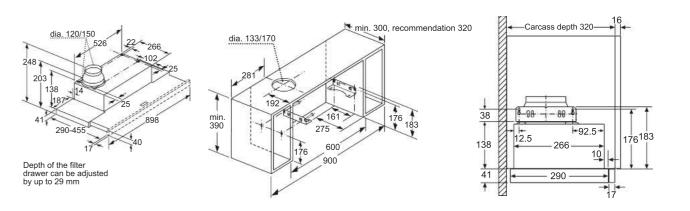


### Telescopic hood LI64MA531B

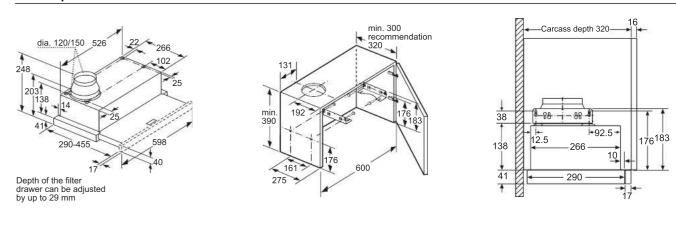



# Hood technical diagrams


### Integrated hoods LE66MAC00B

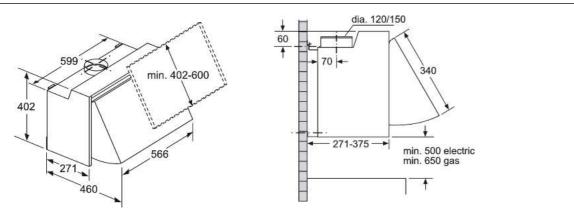


Canopy hood LB87NAC60B










### Canopy hoods LB77NAC60B










### Canopy hood LB75565GB










### Canopy hood LB56NAC60B









### Canopy hood LB53NAA30B







# Intelligent cooling appliances for long lasting freshness

Siemens built-in cooling appliances provide the ultimate way to store food flexibly and correctly for optimum freshness.

From our smallest built-in fridge to our most impressive, each appliance brings more freshness and convenience. Siemens cooling appliances offer combinations for every individual requirement, taste and kitchen design. Siemens built-in fridges, freezers and wine coolers come in a wide range of models offering full flexibility when planning a kitchen.



### Siemens built-in cooling warranties:



A five year warranty is available on selected built-in cooling appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.

\*Offer dates: 01.04.25 – 31.03.26. Online registration required. For full T&Cs and qualifying appliances visit siemens-home. bsh-group.com/uk/customer-service/siemens-warranties



All Siemens built-in cooling appliances listed in this brochure have a two year manufacturer's warranty as standard to protect against manufacturing or material faults.



### **Compressor Drive 10 Year Warranty**

Available on selected Siemens built-in fridges and fridge freezers, this warranty covers defects in the compressor motor.

To find out more about warranty and for registration, please visit: UK: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: siemens-home.bsh-group.com/ie/customer-service/warranty

# Keep food fresh for longer



### hyperFresh technology:

Set the right conditions to ensure food stays fresh for longer: hyperFresh humidity drawers and near 0°C chiller drawers.



















Freshness controlled: hyperFresh
The stylish hyperFresh control panel
enables simple adjustment to the
humidity in the fridge. The hyperFresh
drawer with rippled base allows cool
air to easily circulate around fruits and
vegetables. As a result, the quality and
freshness of food will be retained.



Shelf life maximised: hyperFresh Plus
The hyperFresh Plus drawer does not
just store food, it provides the right
conditions to keep ingredients fresh
for longer. Whether it is being used
for storing fruits or vegetables, it will
increase shelf life and reduce food
wastage. Simply switch between the
2 control settings, and the humidity
will be adjusted for optimum storage
of the food.



### Food stays fresh for longer: hyperFresh Premium

With a choice of 3 humidity controls, simply select between storing fruits, vegetables, or both. The hyperFresh Premium drawer will regulate how much humidity the food receives. These innovative drawers help to keep in nutrients and minerals to create delicious meals and fewer trips to the supermarkets, saving time, effort and money. hyperFresh Premium is available in selected Siemens single door fridges only.

### hyperFresh near 0°C chiller drawers. Perfectly fresh for fish and meat:

hyperFresh and hyperFresh Plus models: The two hyperFresh near 0°C chiller drawers are specially designed for the storage needs of fish and meat. Keep them fresher in ideal conditions near 0°C to retain the vitamins and minerals for longer. With two separate compartments the transfer of unpleasant smells will be avoided.

hyperFresh Premium models: These variants come complete with a larger full-length near 0°C chiller drawer, where fish and meat are stored at the perfect temperature.

# Explore more cooling features

### Experience intelligent cool with Siemens Home Connect.

### **Smart fridges**

Using the Siemens Home Appliances App, the temperature of the fridge can be adjusted, or superCool can be turned on while on the way home from the food shop. It is even possible to turn on holiday mode from anywhere, to save energy where required. The app sends useful push notifications when there has been a significant temperature change in the fridge, or if the door has been left open, minimising the risk of food waste.



### Optimised cooling.



### autoAirflow system

This system works with the electronics to optimise the air circulation within the fridge and freezer compartments to ensure even cooling throughout the appliance. This means however groceries are organised, they will be cooled quickly. The back wall of the appliance has open vents which work with the cooling circuit to draw cold air into each compartment.



### Type of control.



At the touch of a button, the in-door LCD display offers precision control to allow the optimum temperature for food to be maintained easily. This in turn helps to keep food fresh for longer.

### LED Light.





The new integrated long-lasting LED lights available on most of our range fit flush in the side walls or ceiling and illuminate the interior uniformly.




### Suitable storage solutions for all needs.





Ergonomically ideal access Fully-retractable drawers on telescopic rails create an easy access shelving zone. This makes it easy to pull the drawers out further, providing a better overview of all food items and making them easier to remove.





**Bottle rack** Available on some models, the perfect place to store wine of all varieties and make the best use of fridge space. The waveshaped bottle rack can be positioned

in a variety of places and

safely stores bottles without them rolling back and forth.





freshProtectbox

Provides the optimum temperature for individual foods, allowing them to stay fresher for longer. This in turn helps reduce waste and trips to the supermarket saving time and money.



# Freezer features

With noFrost technology, the freezer no longer needs to be defrosted manually.



#### noFrost

Defrosting the freezer is now done automatically. Siemens freezers are equipped with intelligent sensor-controlled technology to save the chore of defrosting the freezer. An air-circulation system guides the humidity to the outside of the refrigerator into an external evaporation tray, and sensors measure the degree of humidity and any frost production – ensuring the appliance is periodically defrosted without the need to turn it off or empty it out. Also, ice no longer forms on the inside of the refrigerator, and the appliance's energy consumption remains consistently low.



#### lowFrost

For those models that come with lowFrost, life is still made easier. lowFrost reduces the build-up of frost by up to 50%, so there is no need to defrost the freezer as often – only once every 3 to 4 years. Designed to save time and provide added convenience so time can be spent doing enjoyable activities, not defrosting the freezer.

# Storage made easy with bigBox.



Big enough for a busy lifestyle, the bigBox has the capacity for storing whole frozen turkeys, as well as the height to hold dessert glasses upright. Ideal for the holidays and entertaining.



#### Other useful freezer features.



#### superFreeze function

superFreeze makes sure that warmer food added to the freezer does not raise the freezer temperature, stopping food partially defrosting.



#### superCoo

The superCool button can be used to quickly reduce the temperature in the refrigerator to +2 °C. This prevents any undesirable rises in the temperature of already chilled food whenever new food is added which is not as cold.



#### iceTwiste

Simply activate the iceTwister and receive up to 20 ice cubes at once right away. The water tank is very easy to remove for reliable refilling.



#### iceDispense

Models with this feature are able to dispense ice when needed thanks to a plumbed water connection. Depending on model, ice is available as cubes or crushed.



#### freezerLigh

Our special LED freezerLight makes it possible to get the perfect overview of the freezer compartment by providing light to the whole area.

# Create combinations to fit every lifestyle

Our built-in cooling appliances come in a wide range of heights and widths to create the perfect combination for the kitchen.



Our built-in cooling appliances are available in a range of heights and widths to fit within a variation of kitchen designs and available spaces.

#### Height and width:

All dimensions are shown as Height x Width




193.5 x 69.1cm 193.5 x 55.8cm

#### Fridge Freezer split options:



Our range of fridge freezers are available in a variety of sizes with different splits of fridge areas and freezer areas. Alternatively, a bespoke split can be created using separate fridge and freezer units stacked or paired side-by-side.



#### Fridge Freezer split %

50

50



#### 193.5 x 54.1cm Flexible shelves and door racks.

Enjoy convenience with easyLift shelves. Even when full, the shelves can be raised or lowered by 6cm to make room for taller items – ideal for serving jugs. Our easyLift door trays are also great for large bottles in the fridge door, the shelf can be adjusted to meet the flexible requirements of individual lifestyles.



#### modularFit cooling appliances for flexible design.

Siemens modularFit appliances are freely combinable. A kitchen should match the household's lifestyle. That is why our single door cooling and freezing appliances can be combined perfectly for individual requirements and taste. With unique and innovative cooling technologies the appliances can even enrich everyday life. Siemens modularFit appliances come with exciting innovations like hyperFresh and noFrost technology. The simple installation as well as an energy efficiency category offers maximum flexibility and freshness.

#### Combine cooling and freezing appliances in any way with modularFit.

Thanks to the anti-condensation technology, it is possible to install cooling and freezing appliances next to each other in multiple different layouts. The innovative technology prevents the build-up of moisture between the appliances, keeping everything fresh and clean.

#### Models that can sit side-by-side:

**Built-in Fridges** KI81RADD0G KI81RNSE0G KI81RVFE0G KI82LVFE0

**Built-in Freezers** GI81NHCE0 GI81NVEE0G



#### Choosing the right hinge: fixed and sliding.

Siemens built-in cooling appliances are available with specific types of hinges that either aid the installation and design of the kitchen or can be matched for replacement appliances.



# Fixed hinge

A fixed hinge means that the furniture door is mounted to the appliance door. Advantages of a fixed hinge mean that we can offer softClosing doors that automatically close at an angle of approx 15°-20° preventing the door from accidentally being left open. The installation also offers better access to the appliance interior and due to the optimised width, higher energy efficiency with competitive volume.

They are thoroughly tested to withstand constant opening and closing. The softClose door retracts effortlessly and creates minimal noise. In addition to aesthetics, a softClose door ensures that items within the fridge are not disturbed from a heavy impact, meaning no spills to clean.

A sliding hinge means that the furniture door is mounted at the kitchen cabinet body as well as a sliding rail to connect the fridge and furniture door.



# Room to fit any lifestyle

Standard KI86NADDO

XL KI96NVFD0 XXL KB96NADDOG



# The Siemens integrated XL and XXL fridge freezers.





A perfect blend of increased capacity, freshness and flexibility that seamlessly fit into any kitchen design. With our innovative appliances, consumers can enjoy more room to store all their fresh food and ingredients, with a cooling space that adapts to their needs.

Gone are the days of constantly rearranging everything to fit in groceries. Our combinations of fridge, freezer, and door compartments provide consumers with the perfect organisation system, allowing them to store food and beverages for large parties or everyday meals without any hassle. Our XL models offer 11% more capacity compared to the standard fridge freezer, while the larger XXL models offer an impressive 45% more capacity.

But it is not just about capacity. Our integrated fridge freezers are designed to seamlessly blend into the kitchen, while boasting sleek modern design when opened, adding style and sophistication to any kitchen.

## Increased Flexibility, Better Storage Options.


The design interior allows for maximum flexibility. The modularFit feature gives the freedom to position the fridge and the freezer according to preference, creating a customised and convenient kitchen setup. The flexShelf gives even more storage freedom with the option to fold the shelf completely against the back wall to use all the space or slide the front part of the flexShelf under the back part and use the other half for smaller items.







Built-in fridge freezer range

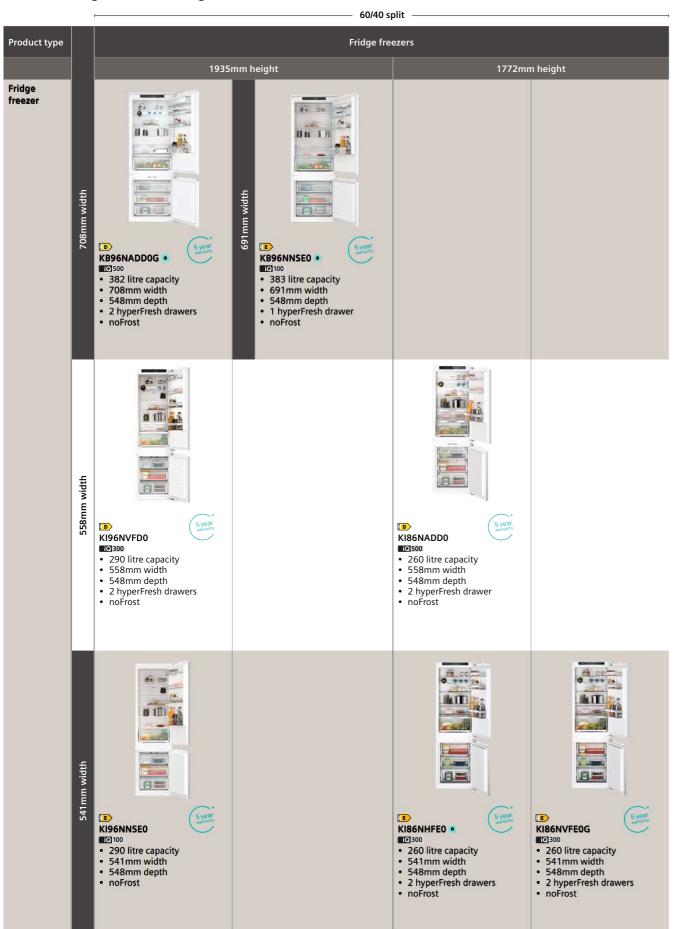



Home Connect				
60/40	) split —	70/30	) split —	50/50 split ———
		Fridge freezers		
		1772mm height		
1 co-			fi com	Min as Pro
Shift Wa	A		No. OF THE REAL PROPERTY.	
		<u></u>		
Syear warranty	2 year warfanty	2 year warranty	E (2 year warranty	S years warmen't
KI86NVSEOG	KI86VVFEUG	KI87VVFEUG	iQ 100	KI85NNFEOG
<ul> <li>260 litre capacity</li> <li>541mm width</li> <li>548mm don'th</li> </ul>	267 litre capacity     541mm width     548mm donth	270 litre capacity     541mm width     548mm donth	• 270 litre capacity • 541mm width	249 litre capacity     541mm width
<ul><li>548mm depth</li><li>2 hyperFresh drawers</li><li>noFrost</li></ul>	548mm depth     1 hyperFresh drawer     lowFrost	548mm depth     1 hyperFresh drawer     lowFrost	548mm depth     lowFrost	548mm depth     noFrost

Built-in single door fridge range









Built-in single door freezer range



#### Wine cabinet range



# Fridge freezers

noFrost

#### 500 KB96NADD0G

noFrost bottom fridge freezer 193.5cm high



Built-in fridge freezer specifications

Appliance type	XXL noFrost bottom fridge freezer	
Design family	iQ 500	
Model number	KB96NADD0G	
Design features		
Fridge / Freezer split	60 / 40	
noFrost	•	
lowFrost (Manual defrost)	-	
softClose hinge	•	
Type of hinge (reversible)	Fixed hinge	
Home Connect	•	
Food freshness system		
hyperFresh	2 x hyperFresh drawers	
Key features – fridge section		
Light	LED	
superCool function	•	
Type of control	Electronic	
Number of shelves	5	
Number of adjustable shelves	4	
Number of door bins / shelves	4	
Type of shelves	Safety glass	
Temperature display	Digital LED	
Warning signal door open		
Bottle shelves in fridge	•	
Key features - freezer section		
superFreeze function	_	
Temperature adjustable in freezer		
Number of ice cube trays	1	
Number of freezer drawers	3	
Additional information		
Energy efficiency class	ê D	
Energy consumption <sup>1</sup> (kWh/annum)	204	
Total net capacity (litres)	382	
Refrigerator net capacity (litres)	284	
Freezer net capacity (litres)	98	
Climate class <sup>2</sup>	SN-T	
Noise level (dB [A] re 1pW)	33	
Noise level class	В	
Sabbath mode		
10 Year Compressor Warranty	<b>■</b> 3	
Additional accessories included	1 x ice cube tray 1 x bottle support	
Height of product (mm)	1935	
Width of product (mm)	708	
Depth of product (mm)	548	

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.







Built-in fridge freezer specifications

Appliance type	XXL noFrost bottom fridge freezer	XL noFrost bottom	n fridge freezers
Design family	iQ 100	iQ300	iQ 100
Model number	KB96NNSE0	KI96NVFD0	KI96NNSE0
Design features			
Fridge / Freezer split	60 / 40	60 / 40	60 / 40
noFrost	•	•	
lowFrost (Manual defrost)	-	-	-
softClose hinge	-	-	_
Type of hinge (reversible)	Sliding hinge	Fixed hinge	Sliding hinge
Home Connect	•	-	-
Food freshness system			
hyperFresh	1 x hyperFresh drawer	2 x hyperFresh drawers	1 x vegetable box
Key features – fridge section			
Light	LED	LED	LED
superCool function	•	•	•
Type of control	Electronic	Electronic	Electronic
Number of shelves	5	4	5
Number of adjustable shelves	4	3	4
Number of door bins / shelves	4	4	4
Type of shelves	Safety glass	Safety glass	Safety glass
Temperature display	Digital LED	Digital LED	Digital LED
Warning signal door open	•	•	
Bottle shelves in fridge	-	•	-
Key features – freezer section			
superFreeze function	•	•	
Temperature adjustable in freezer	•	•	
Number of ice cube trays	1	1	1
Number of freezer drawers	3	3	3
Additional information			
Energy efficiency class	A E	â D	↑ E
Energy consumption¹ (kWh/annum)	256	184	231
Total net capacity (litres)	383	290	290
Refrigerator net capacity (litres)	285	215	215
Freezer net capacity (litres)	98	75	75
Climate class <sup>2</sup>	SN-ST	SN-ST	SN-ST
Noise level (dB [A] re 1pW)	34	34	34
Noise level class	В	В	В
Sabbath mode			
10 Year Compressor Warranty			
Additional accessories included	1 x ice cube tray	1 x ice cube tray 1 x bottle support	1 x ice cube tray
Height of product (mm)	1935	1935	1935
Width of product (mm)	691	558	541
Depth of product (mm)	548	548	548

Yes, model has this feature. – Feature not available for this model.

 $<sup>^{\</sup>rm 1}$  Actual energy consumption will depend on how the appliance is used and where it is located.

<sup>&</sup>lt;sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.

Climate zone T = designed to operate in ambient temperature of  $+18^{\circ}$ C to  $43^{\circ}$ C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

<sup>&</sup>lt;sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

 $<sup>^2</sup>$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.



#### Built-in fridge freezer specifications

Appliance type noFrost bottom fridge freezers			
Design family	iQ 500	iQ300	iQ300
Model number	KI86NADD0	KI86NHFE0	KI86NVFE0G
Design features			
Fridge / Freezer split	60 / 40	60 / 40	60 / 40
noFrost	•	•	
owFrost (Manual defrost)	-	-	-
softClose hinge	•	-	-
Type of hinge (reversible)	Fixed hinge	Fixed hinge	Fixed hinge
Home Connect	-	•	-
Food freshness system			
hyperFresh	2 x hyperFresh drawers	2 x hyperFresh drawers	2 x hyperFresh drawers
Key features – fridge section			
Light	LED	LED	LED
superCool function	•	-	-
Type of control	Electronic	Electronic	Electronic
Number of shelves	4	4	4
Number of adjustable shelves	2	3	3
Number of door bins / shelves	3	3	3
Type of shelves	Safety glass	Safety glass	Safety glass
Temperature display	Digital LED	Digital LED	Digital LED
Warning signal door open	•	•	
Bottle shelves in fridge	•	•	
Key features – Freezer section			
superFreeze function	•		
Temperature adjustable in freezer	•	-	-
Number of ice cube trays	1	1	1
Number of freezer drawers	3	3	3
Additional information			
Energy efficiency class	â D	ā E	A E
Energy consumption¹ (kWh/annum)	186	234	234
Total net capacity (litres)	260	260	260
Refrigerator net capacity (litres)	184	184	184
Freezer net capacity litres	76	76	76
Climate class <sup>2</sup>	SN-ST	SN-ST	SN-ST
Noise level (dB [A] re 1pW)	35	35	35
Noise level class	В	В	В
Sabbath mode	-	-	-
10 Year Compressor Warranty	•	•	
Additional accessories included	1 x ice cube tray 1 x bottle support	1 x ice cube tray 1 x bottle support	1 x ice cube tray 1 x bottle support
Height of product (mm)	1772	1772	1772
Height of product (mm) Width of product (mm)	1772 558	1772 541	1772 541



## Built-in fridge freezer

specifications	2023	~
Appliance type	noFrost bottom f	
Design family	iQ300	iQ 100
Model number	KI86NVSE0G	KI85NNFE0G
Design features		
Fridge / Freezer split	60 / 40	50 / 50
noFrost	•	
lowFrost (Manual defrost)	-	=
softClose hinge	-	
Type of hinge (reversible)	Sliding hinge	Fixed hinge
Home Connect	-	-
Food freshness system		
hyperFresh	2 x hyperFresh drawers	1 x vegetable box
Key features – fridge section		
Light	LED	LED
superCool function	-	■
Type of control	Electronic	Electronic
Number of shelves	4	3
Number of adjustable shelves	3	2
Number of door bins / shelves	3	2
Type of shelves	Safety glass	Safety glass
Temperature display	Digital LED	Digital LED
Warning signal door open		
Bottle shelves in fridge		_
Key features – Freezer section		
superFreeze function	•	
Temperature adjustable in freezer	_	-
Number of ice cube trays	1	1
Number of freezer drawers	3	4
Additional information		
Energy efficiency class	A E	A E
Energy consumption¹ (kWh/annum)	234	239
Total net capacity (litres)	260	249
Refrigerator net capacity (litres)	184	150
Freezer net capacity litres	76	99
Climate class <sup>2</sup>	SN-ST	SN-ST
Noise level (dB [A] re 1pW)	35	39
Noise level class	В	C
Sabbath mode	-	
10 Year Compressor Warranty		•
Additional accessories included	1 x ice cube tray 1 x bottle support	1 x ice cube tray
Height of product (mm)	1772	1772
Width of product (mm)	541	541
Depth of product (mm)	548	548

<sup>■</sup> Yes, model has this feature. - Feature not available for this model.

<sup>&</sup>lt;sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

 $<sup>^2</sup>$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18 $^{\circ}$ C to 43 $^{\circ}$ C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

<sup>&</sup>lt;sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

 $<sup>^2</sup>$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

# Fridge freezers

#### lowFrost

#### iQ 300 KI87VVFE0G

## noFrost bottom fridge freezer 177cm high











Built-in fridge freezer specifications

Appliance type	lowFrost bottom fridge freezer
Design family	iQ300
Model number	KI87VVFE0G
Design features	
Fridge / Freezer split	70 / 30
noFrost	-
lowFrost (Manual defrost)	-
softClose hinge	-
Type of hinge (reversible)	Fixed hinge
Home Connect	-
Food freshness system	
hyperFresh	1 hyperFresh drawer
Key features – fridge section	
Light	LED
superCool function	-
Type of control	Electronic
Number of shelves	5
Number of adjustable shelves	4
Number of door bins / shelves	4
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	
Key features – freezer section	7147
superFreeze function	
Temperature adjustable in freezer	-
Number of ice cube trays	1
Number of freezer drawers	2
Additional information	
Energy efficiency class	A E
Energy consumption <sup>1</sup> (kWh/annum)	216
Total net capacity (litres)	270
Refrigerator net capacity (litres)	200
Freezer net capacity litres	70
Climate class <sup>2</sup>	SN-ST
Noise level (dB [A] re 1pW)	35
Noise level class	В
Sabbath mode	
10 Year Compressor Warranty	
Additional accessories included	1 x ice cube tray 1 x bottle support
Height of product (mm)	1772
Width of product (mm)	541
Depth of product (mm)	548

<sup>■</sup> Yes, model has this feature. - Feature not available for this model.



Built-in fridge freezer specifications

specifications	4	4
Appliance type	lowFrost bottom	fridge freezers
Design family	iQ300	iQ 100
Model number	KI86VVFE0G	KI87VNSE0G
Design features		
Fridge / Freezer split	60 / 40	70 / 30
noFrost	-	-
lowFrost (Manual defrost)		
softClose hinge	-	-
Type of hinge (reversible)	Fixed hinge	Sliding hinge
Home Connect	-	-
Food freshness system		
hyperFresh	1 hyperFresh drawer	1 x vegetable box
Key features – fridge section		
Light	LED	LED
superCool function	-	
Type of control	Electronic	Electronic
Number of shelves	4	5
Number of adjustable shelves	3	4
Number of door bins / shelves	3	4
Type of shelves	Safety glass	Safety glass
Temperature display	Digital LED	Digital LED
Warning signal door open		•
Bottle shelves in fridge	•	
Key features – freezer section		
superFreeze function	•	
Temperature adjustable in freezer	_	_
Number of ice cube trays	1	1
Number of freezer drawers	3	2
Additional information		
Energy efficiency class	A E	A E
5 1 (1 (1 (1 )	229	
Energy consumption¹ (kWh/annum)	· ·	216
Total net capacity (litres)	267	270
Refrigerator net capacity (litres)	183	200
Freezer net capacity litres	84	70
Climate class <sup>2</sup>	SN-ST	SN-ST
Noise level (dB [A] re 1pW)	35	35
Noise level class	В	В
Sabbath mode	-	
10 Year Compressor Warranty Additional accessories included	1 x ice cube tray 1 x bottle support	1 x ice cube tray
Height of product (mm)	1772	1772
Width of product (mm)	541	541
Depth of product (mm)	548	548

<sup>■</sup> Yes, model has this feature. - Feature not available for this model.

<sup>&</sup>lt;sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

 $<sup>^2</sup>$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

 $<sup>^{\</sup>mbox{\tiny 1}}$  Actual energy consumption will depend on how the appliance is used and where it is located.

 $<sup>^2</sup>$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

# Single door fridges and freezers



#### iQ 500 KI81RADD0G


Single door fridge 177cm high











Appliance type	Fridge 177cm
Design family	iQ 500
Model number	KI81RADD0G
Design features	
noFrost	
lowFrost (Manual defrost)	
softClose hinge	•
Type of hinge (reversible)	Fixed hinge
Home Connect	-
Food freshness system	
hyperFresh	2 x hyperFresh drawers 1 x veg box
Key features – fridge section	
Light	LED
superCool function	( )
Type of control	Electronic
Number of shelves	7
Number of adjustable shelves	4
Number of door bins / shelves	5
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	
Key features - freezer section	
superFreeze function	-
Temperature adjustable in freezer	=
Number of ice cube trays	
Number of freezer drawers	-
Additional information	
Energy efficiency class	€ D
Energy consumption <sup>1</sup> (kWh/annum)	91
Total net capacity (litres)	310
Freezer net capacity (litres)	
Climate class <sup>2</sup>	SN-ST
Noise level (dB [A] re 1pW)	34
Noise level class	В
Sabbath mode	=
10 Year Compressor Warranty	
Additional accessories included	1 x bottle support
Height of product (mm)	1772
Width of product (mm)	558
Depth of product (mm)	548
■ Yes, model has this feature Feature not availa	ble for this model.







Built-in single door fridges and

reezer specifications		
Appliance type	Fridges	177cm
Design family	iQ300	iQ 100
Model number	KI81RVFE0G	KI81RNSE0G
Design features		
noFrost	-	-
lowFrost (Manual defrost)	•	
softClose hinge	-	-
Type of hinge (reversible)	Fixed hinge	Sliding hinge
Home Connect	-	-
Food freshness system		
hyperFresh	2 x vegetable boxes	2 x vegetable boxes
Key features – fridge section		
Light	LED	LED
superCool function	•	
Type of control	Electronic	Electronic
Number of shelves	7	7
Number of adjustable shelves	5	5
Number of door bins / shelves	5	5
Type of shelves	Safety glass	Safety glass
Temperature display	Digital LED	Digital LED
Warning signal door open	•	
Bottle shelves in fridge	•	-
Key features – freezer section		
superFreeze function	-	-
Temperature adjustable in freezer	-	-
Number of ice cube trays	-	-
Number of freezer drawers	-	-
Additional information		
Energy efficiency class	A E	ā E
Energy consumption <sup>1</sup> (kWh/annum)	114	114
Total net capacity (litres)	310	310
Freezer net capacity (litres)	-	-
Climate class <sup>2</sup>	SN-ST	SN-ST
Noise level (dB [A] re 1pW)	35	35
Noise level class	В	В
Sabbath mode	-	-
10 Year Compressor Warranty	•	
Additional accessories included	1 x bottle support	-
Height of product (mm)	1772	1772
Width of product (mm)	541	541
Depth of product (mm)	548	548

<sup>■</sup> Yes, model has this feature. - Feature not available for this model

<sup>&</sup>lt;sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

 $<sup>^2</sup>$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

 $<sup>^{\</sup>star}$ 5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

<sup>&</sup>lt;sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

 $<sup>^2</sup>$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.











#### Built-in single door fridges and freezer specifications

Appliance type Freezers 177cm		rs 177cm
Design family	TQ 700	[Q]300
Model number	GI81NHCE0	GI81NVEE0G
Design features		
noFrost		•
lowFrost (Manual defrost)	-	-
softClose hinge	•	-
Type of hinge (reversible)	Fixed hinge	Fixed hinge
Home Connect	•	-
Food freshness system		
hyperFresh	-	-
Key features – fridge section		
Light	-	-
superCool function	-	-
Type of control	Electronic	Electronic
Number of shelves	-	-
Number of adjustable shelves	-	-
Number of door bins / shelves	-	-
Type of shelves	-	-
Temperature display	Digital LED	Digital LED
Warning signal door open	-	-
Bottle shelves in fridge	-	-
Key features – freezer section	·	
superFreeze function		•
Temperature adjustable in freezer	•	•
Number of ice cube trays	1	1
Number of freezer drawers	5	5
Additional information	·	
Energy efficiency class	A E	A E
Energy consumption <sup>1</sup> (kWh/annum)	235	235
Total net capacity (litres)	212	212
Freezer net capacity (litres)	212	212
Climate class <sup>2</sup>	SN-T	SN-T
Noise level (dB [A] re 1pW)	35	35
Noise level class	В	В
Sabbath mode	-	-
10 Year Compressor Warranty		
Additional accessories included	1 x ice cube tray	1 x ice cube tray
Height of product (mm)	1772	1772
Width of product (mm)	558	558
Depth of product (mm)	545	545

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.









### Built-in single door fridges and freezer

specifications	4.
Appliance type	Built-under fridges with ice box 82cm
Design family	iQ300
Model number	KU22LVFD0G
Design features	
noFrost	-
lowFrost (Manual defrost)	
softClose hinge	-
Type of hinge (reversible)	Fixed hinge
Home Connect	
Food freshness system	
hyperFresh	-
Key features – fridge section	
Light	LED
superCool function	•
Type of control	Electronic
Number of shelves	3
Number of adjustable shelves	2
Number of door bins / shelves	2
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	-
Key features – freezer section	
superFreeze function	-
Temperature adjustable in freezer	-
Number of ice cube trays	1
Number of freezer drawers	-
Additional information	
Energy efficiency class	
Energy consumption <sup>1</sup> (kWh/annum)	119
Total net capacity (litres)	110
Freezer net capacity (litres)	17
Climate class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	35
Noise level class	В
Sabbath mode	-
10 Year Compressor Warranty	
Additional accessories included	1 x ice cube tray
Height of product (mm)	820
Width of product (mm)	598
Depth of product (mm)	548

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.

<sup>&</sup>lt;sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

 $<sup>^2</sup>$  Climate zone SN = designed to operate in ambient temperature of +10  $^{\circ}$  C to 32  $^{\circ}$  C. Climate zone T = designed to operate in ambient temperature of  $+18^{\circ}$ C to  $43^{\circ}$ C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

 $<sup>^{\</sup>mbox{\tiny 1}}$  Actual energy consumption will depend on how the appliance is used and where it is located.

 $<sup>^2</sup>$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

<sup>\*5</sup> year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.





#### Built-under single door fridges and freezer specifications

Appliance type	Built-under fridges 82cm	Built-under freezers 82cm
Design family	iQ 300	iQ300
Model number	KU21RVFE0G	GU21NVFE0G
Design features		
noFrost	-	
lowFrost (Manual defrost)		-
softClose hinge	-	-
Type of hinge (reversible)	Fixed hinge	Fixed hinge
Home Connect	•	•
Food freshness system		
hyperFresh	_	-
Key features – fridge section		
Light	LED	-
superCool function	•	-
Type of control	Electronic	Electronic
Number of shelves	4	-
Number of adjustable shelves	3	-
Number of door bins / shelves	2	-
Type of shelves	Safety glass	-
Temperature display	Digital LED	Digital LED
Warning signal door open		-
Bottle shelves in fridge	-	-
Key features – freezer section		
superFreeze function	-	•
Temperature adjustable in freezer	-	•
Number of ice cube trays	-	1
Number of freezer drawers	-	3
Additional information		
Energy efficiency class	<del>G</del> E	4-G
Energy consumption <sup>1</sup> (kWh/annum)	93	189
Total net capacity (litres)	134	85
Freezer net capacity (litres)	-	85
Climate class <sup>2</sup>	SN-T	SN-T
Noise level (dB [A] re 1pW)	35	35
Noise level class	В	В
Sabbath mode		
10 Year Compressor Warranty		
Additional accessories included	-	1 x ice cube tray
Height of product (mm)	820	820
Width of product (mm)	598	598
Depth of product (mm)	548	548

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.




 $<sup>^{\</sup>mbox{\tiny 1}}$  Actual energy consumption will depend on how the appliance is used and where it is located.

 $<sup>^2</sup>$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

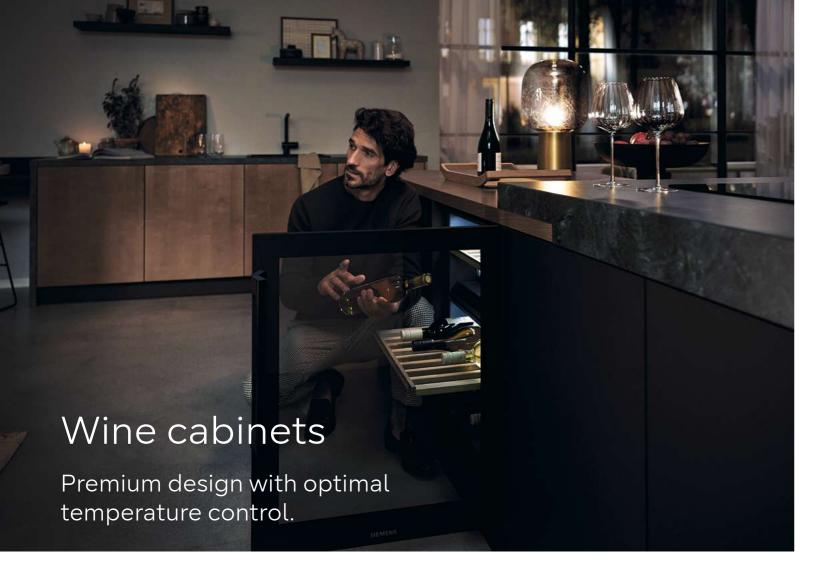

#### For carefully stored and beautifully presented wine bottles.

Our wine cabinets will ensure bottles are displayed effortlessly whilst making an impressive visual statement. Thanks to Siemens state-of-the-art technology, wines will be maintained at the optimal temperature for their type. So each individual bottle – whether it is red, white or sparkling, is conditioned perfectly to be enjoyed when needed.

Siemens wine cabinets are designed to provide great first-rate storage for any wine. Wine bottles are presented elegantly on beautifully crafted oak wooden shelves, reducing the risk of scratches or tears to the bottles and labels. Wood is also the perfect surface to display wine, minimising vibrations which can cause wines to age.

Light, especially sunlight, can adversely affect wine. The sun's ultra violet rays in particular can degrade and prematurely age wine. Siemens wine cabinets are equipped with LED lights to minimise heat emissions and temperature fluctuations. As a result, the cabinet remains at the optimal temperature at which it is set. Settings can be specified from 5-20°C, allowing storage of Champagne from 5-8°C, as well as red wine from 12-20°C.

The glass panelled doors are also protected with a UV filter offering further protection to bottles from any unnecessary light that can lead them to spoil or fade wine labels.

The soft LED feature provides added drama, phasing in gently to reveal the wine. If the cabinet is the focal point of the kitchen, our Presentation Mode feature will enable the light to be kept permanently on, allowing bottles to shine in all their glory.



There is space to fit up to 21 bottles in our 30cm wide cabinet, or up to 44 bottles in our 60cm wide unit. The grey interior gives a premium modern seamless finish throughout the kitchen. Each cabinet is also designed with a reversible hinge allowing the direction the door opens to be changed depending on the flow of the kitchen.

Acoustic warning light indicators will notify if the door is opened for a long period, or if the wine storage compartment is too warm or too cold for an extended period to ensure the wine is kept protected.



#### 2 Year Warranty

A Two year warranty is offered on our wine cabinets to cover manufacturing or material faults.

For more information please see page 4.

#### iQ 500 KU20WVHF0G

Built-under wine cabinet Black











#### Built-under wine cabinet specifications



■ Yes, model has this feature. - Feature not available for this model

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.


<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C Climate zone ST = designed to operate in ambient temperature of +16°C to 38°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.







#### noFrost XXL bottom fridge freezer KB96NADD0G

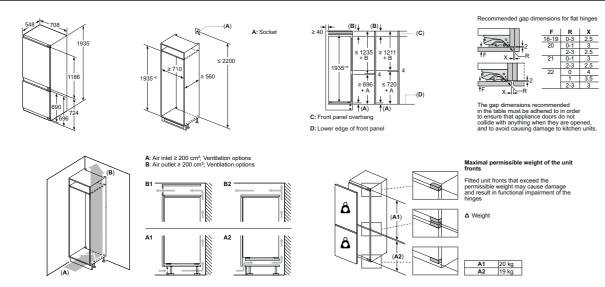


#### noFrost XXL bottom fridge freezer KB96NNSE0

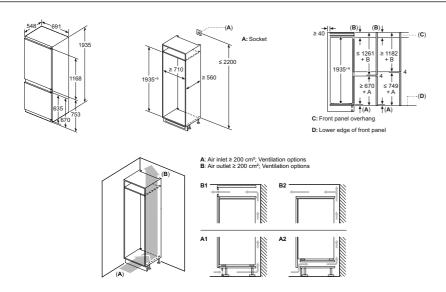


#### noFrost XL bottom fridge freezer KI96NVFD0

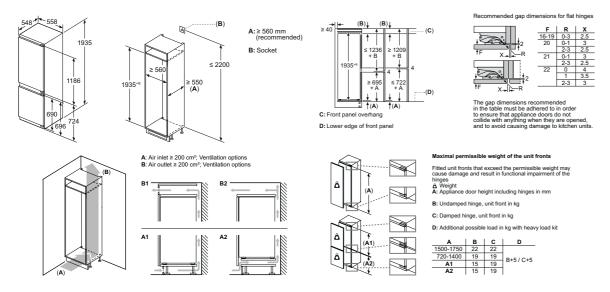


#### noFrost XL bottom fridge freezer KI96NNSE0

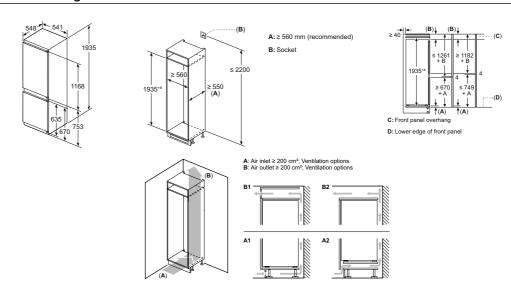


#### noFrost bottom fridge freezer KI86NADD0

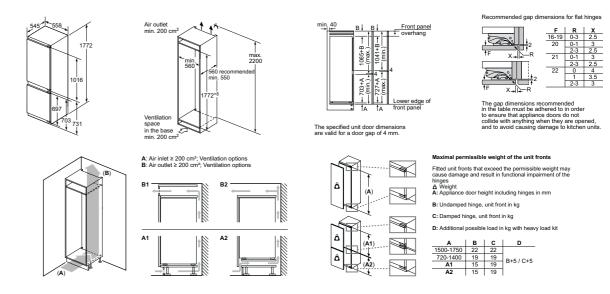


#### noFrost bottom fridge freezers KI86NHFE0 and KI86NVFE0G

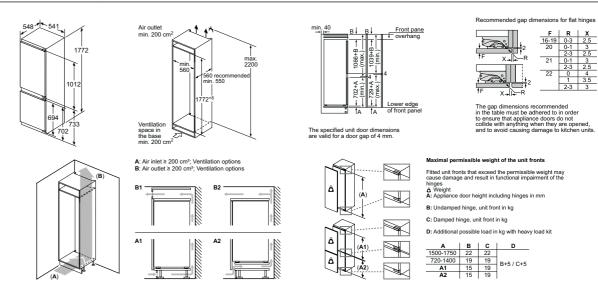


#### noFrost bottom fridge freezers KI86NVSE0G

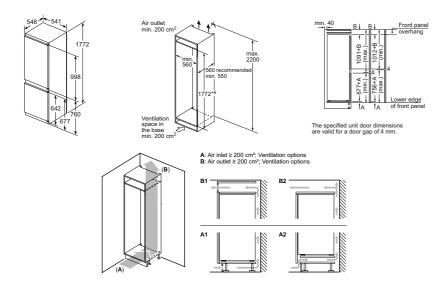


#### lowFrost bottom fridge freezer KI87VVFE0G

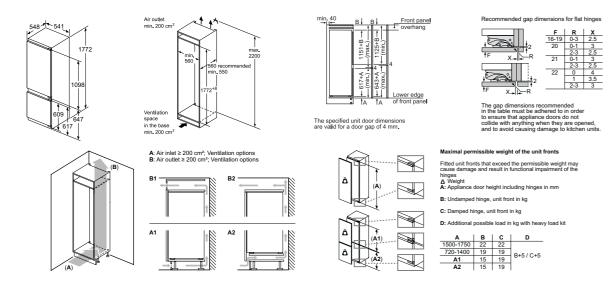


#### lowFrost bottom fridge freezer KI86VVFE0G

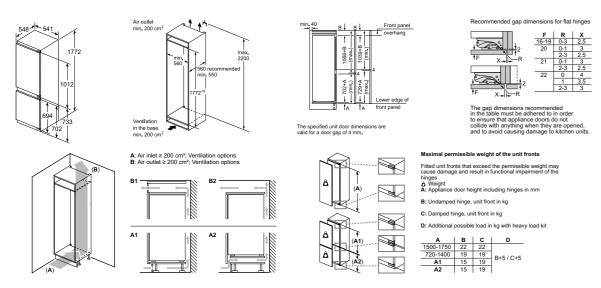


#### lowFrost bottom fridge freezer KI87VNSE0G

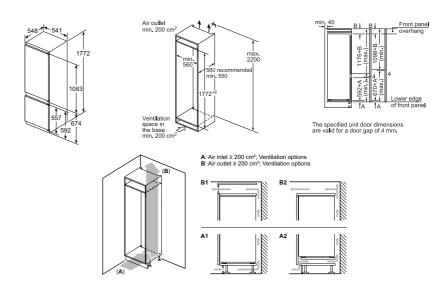


#### 177cm fridges KI81RADD0G and KI81RVFE0G

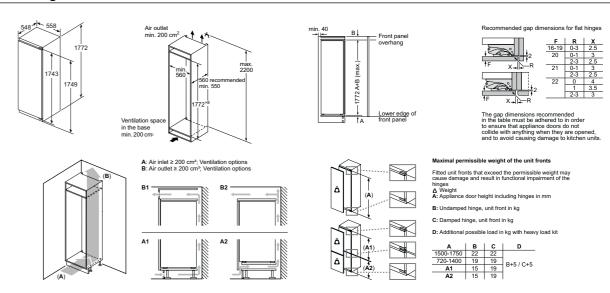


#### noFrost bottom fridge freezers KI85NNFE0G

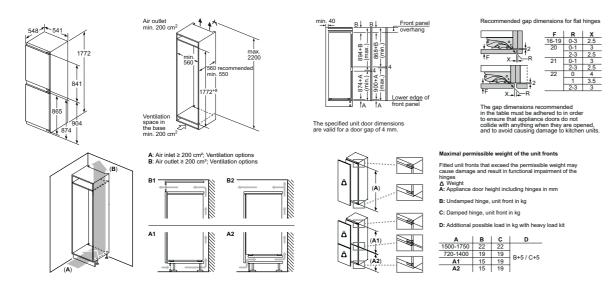


#### 177cm fridge KI81RNSE0G

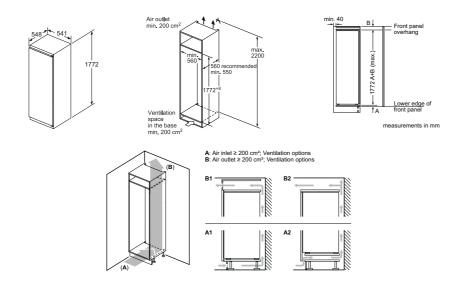


#### 177cm freezers GI81NHCE0 and GI81NVEE0G

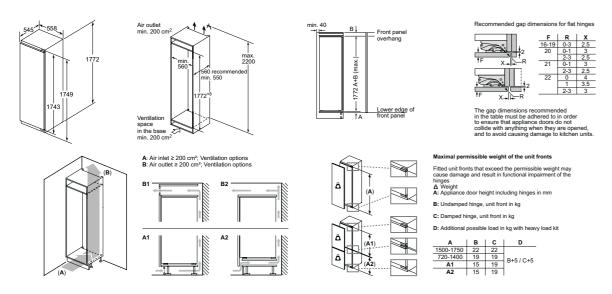


#### 82cm built-under fridges and freezer KU22LVFD0G, KU21RVFE0G and GU21NVFE0G

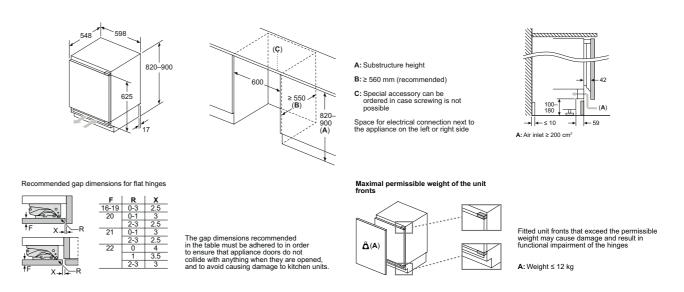


#### Wine cabinet KU20WVHF0G

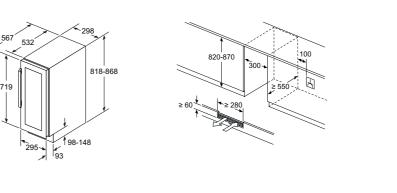



#### Wine cabinet KU21WAHG0G

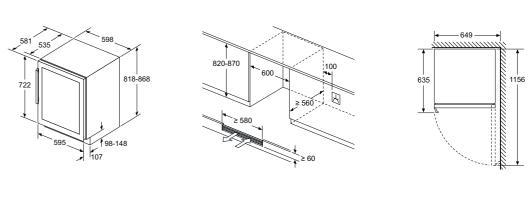

# Cooling. Super efficient, super stylish

Elegant, functional and packed with technology, Siemens freestanding cooling appliances are a talking point in the kitchen.

Whether it is an American Style fridge freezer that has a wow-factor, a side by side fridge and freezer for extra space, or a single appliance, Siemens has a wide range of products to choose from. Our energy efficient appliances are packed with food preservation technology.



#### Siemens freestanding cooling warranties:



#### 5 year warranty

A five year warranty is available on selected freestanding cooling appliances listed in this brochure to protect against manufacturing and material faults during this warranty period.

\*Offer dates: 01.04.25 – 31.03.26. Online registration required. For full T&Cs and qualifying appliances visit siemens-home. bsh-group.com/uk/customer-service/siemens-warranties



#### 2 year warranty

All other Siemens cooling appliances have a two year manufacturer's warranty as standard to protect against manufacturing or material faults.



## **10 Year Compressor Drive Warranty**Available on all Siemens freestanding fridge freezers,

Available on all Siemens freestanding fridge freezers, covers defects in compressor motor.

To find out more about warranty and for registration, please visit: UK: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: siemens-home.bsh-group.com/ie/customer-service/warranty

# Keeping food fresh for longer



# hyperFresh technology

Set the right conditions to ensure food stays fresh for longer with hyperFresh humidity drawers and near 0°C chiller drawers.









Simply use the stylish control panel to adjust the humidity in the fridge. The hyperFresh drawer with a rippled base allows cool air to circulate easily around fruits and vegetables. As a result, the quality and freshness of the ingredients will be retained.







#### Shelf life maximised: hyperFresh Plus

The hyperFresh Plus drawer does not only store food, it provides the right conditions to keep ingredients fresh for longer. Whether it is fruits or vegetables, using the drawer will increase shelf life and reduce food wastage. Simply switch between the 2 control settings, and the humidity will be adjusted for optimum storage of food.









Food stays fresh for longer: hyperFresh Premium Enjoy fresher food with hyperFresh Premium. With a choice of 3 humidity controls, simply select between storing fruits, vegetables, or both. The hyperFresh Premium drawer will regulate how much humidity the food receives. These innovative drawers help to keep in nutrients and minerals to create delicious meals and require fewer trips to the supermarkets, saving time, effort and money. hyperFresh Premium is available in selected Siemens single door fridges

#### Perfectly fresh for fish and meat: hyperFresh near 0°C chiller drawers

The hyperFresh near 0°C chiller drawers, on the hyperFresh and hyperFresh plus models, are especially designed for the storage needs of fish and meat. Keep them fresh in ideal conditions near 0°C to retain the vitamins and minerals for longer. With two separate compartments the transfer of unpleasant smells will be avoided.

hyperFresh Premium models come complete with a larger full-length near 0°C chiller drawer, where fish and meat are stored at the perfect temperature.





With noFrost technology, the job of defrosting the freezer never needs to be done again.



#### noFros

Defrosting the freezer is now done automatically. Siemens freezers are equipped with intelligent sensor-controlled technology to save the hassle of defrosting the freezer. An air-circulation system guides the humidity to the outside of the refrigerator into an external evaporation tray, and sensors measure the degree of humidity and any frost production – ensuring the appliance is periodically defrosted without the need to turn off the appliance or empty it out. Also, ice no longer forms on the inside of the freezer, and the appliance's energy consumption remains consistently low.



#### **lowFrost**

Thanks to the innovative lowFrost technology with the special evaporator, not only is there less ice build up, but also defrosting is much faster than in conventional systems. All lowFrost models have a water drainage system, to allow removal of all thawed water during the defrosting process.

# Freezer storage made easy with bigBox.



Big enough for a busy lifestyle, the bigBox has the capacity for storing whole frozen turkeys, an entire leg of lamb, several pizzas, as well as the height to hold dessert glasses upright.

The bigBox provides plenty of space to accommodate and stack everything. And when an even larger space is needed, all the drawers and shelves can be easily removed from the freezer compartment which is ideal for the holidays and entertaining.





# Stay connected in the kitchen, with Siemens Home Connect.

#### Smart appliances

Cooling appliances with Siemens Home Connect offer the ability to flexibly control Siemens appliances using smart devices, such as a smart phone, tablet or smart speaker. This means appliances can be controlled from anywhere; for example adjusting the appliance temperature to cool down whilst on the way home from the supermarket, or setting the appliance to holiday mode whilst at the airport. Push notifications can also be set up to send an alert if the door has accidentally been left open, or if the temperature has risen above a certain level.

For more information about Siemens Home Connect visit UK: siemens-home.bsh-group.com/uk/inspiration/innovation/connected/cooling

IE: siemens-home.bsh-group.com/ie/inspiration/innovation/connected/cooling


# Cooling key features

#### Colour finish options.

Choose from a selection of colour finishes on Siemens cooling appliances. There is an option to suit every kitchen.







Black glass

Brushed steel anti-fingerprint

Brushed black steel anti-fingerprint

#### Handle options.

Depending on preference, choose from stylish quality bar handles or handles that are integrated into the appliance for a more seamless look.







Integrated Vertical

**Vertical Bar Handles** 

# Temperature displays.


There are options for cooling appliances with a large front display, or with the control hidden on the inside of the appliance as our Siemens cooling range varies from large digital screens visible on the front door of the appliance to internal LED controls.



Exterior Electronic Display



Interior Digital LED Display (iQ300)



Interior Electronic LED Display











#### --→ ←-easyAccess

easyAccess shelving zone on single door freezers Creates additional space whilst delivering the design of an American fridge freezer interior compartment.



## LED Illumination

Integrated seamlessly into the top or the side walls of our cooling appliances, LED lighting is very efficient and gives maximum illumination of the fridge and freezer.



#### autoAirflow system

This system works with the electronics to optimise the air circulation within the fridge and freezer compartments to ensure even cooling throughout the appliance. This means however groceries are organised, it will cool them quickly no matter where they are placed. The back wall of the appliance has open vents which work with the cooling circuit to draw cold air into each compartment.



#### easyl

Adjustable door trays and glass shelves that can be moved even when full for optimal convenience.



#### **Bottle rack**

Available on some models which is the perfect place to store wine of all varieties and make the best use of the fridge space.

# Premium cooling options


### for every size and style of kitchen

#### Choose the style and size.

When considering which freestanding appliance to purchase, there are some key aspects to consider such as what height and width space is available, how much litre capacity as well as what ratio of fridge to freezer is needed.


#### Height and width

Siemens has many different sizes of cooling models to suit varying needs from: 183cm-203cm high and between 60cm and 91cm in width.

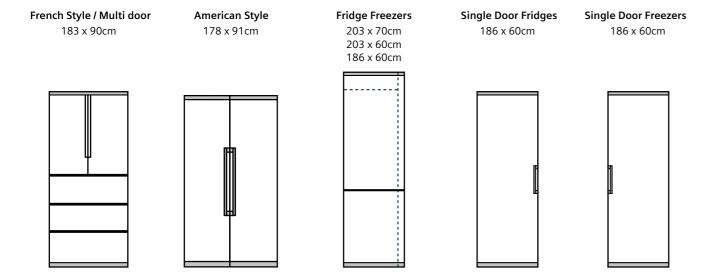

#### Fridge Freezer split options

Siemens freestanding fridge freezers are split into two separate compartments, so the split proportions can be decided depending on the food usage requirements.





# No distance


#### Create the perfect pair.

For extra internal space pair one of the below Siemens upright fridges alongside a Siemens upright freezer to re-create the style of an American fridge freezer with our easy access shelving zone.

For a design statement, combine the Black Steel iQ500 KS36VAXEP (fridge) with the iQ500 GS36NAXEP (freezer).


To complete these looks, a joining strip will need to be purchased to secure the two appliances. These can be bought through our website or through a retailer.

The joining strip product codes are: KS39ZAL00 – Stainless Steel Easy Clean KS39ZAX00 – Black Steel











Models shown above:

KS36VVIEPG ↑ (fridge)

G A D

GS36NVIEPG A

A G KS39ZAL00 (1.Stainless Steel Easy Clean)
KS39ZAX00 (2.Black Steel Easy Clean)

KS36VAXEP

Models shown above:

P A E

GS (fr

GS36NAXEP A

#### Tried and tested.

All Siemens fridges and freezers are built to last. Rigorous testing ensures that our products meet all the requirements of our customers. Every single one of our appliances is tested before it leaves the factory. For 24 hours a day, components are tested continuously to the maximum tolerance possible for the equivalent lifetime of the appliance.

Our doors are weighted and then opened and closed by the handle 200,000 times during testing to ensure they are robust (200,000 times is equivalent to opening and closing the door 27 times per day for 20 years). Materials are not only tested for suitability and longevity, we also look at how they sound and feel when we use them.

# Make a stylish statement in the kitchen

#### Introducing Multi Door / American Style fridge freezers

From the premium double-width shelving to the sleek outer finishes – the Multi Door / American Style fridge freezers are designed to stand out in the kitchen. Behind the scenes, our cooling technologies such as multiAirFlow and fresh boxes provide the optimum temperatures to keep all food and drink at their best. While adjustable shelving and smart compartments make it easy to personalise the fridge space and keep shopping organised. Defrosting the freezer will not be needed ever again with our noFrost technology, preventing frost build up.





#### Room for more. Refreshment at any time.

#### Room for more

The KF96RSBEA comes with a full width fridge and pull-out freezer. It even comes with a separate beverage drawer that has premium oak shelving compartments and five different set temperatures for soft drinks, beer, champagne, white wine and red wine. The beverage drawer stores drinks at the ideal temperature, always ready to enjoy. Perfect for busy kitchens and hosting.

#### Refreshment anytime

The new KF96DPXEA is the perfect combination, where freshness meets intelligent design. Featuring a quick ice and water dispenser with bottle fill function that can dispense up to 5kg of ice per day (cubes or crushed). It can also dispense freshly filtered water as needed with the built-in UltraClarityPro water filter. It also features a multi purpose shelf, which can be used as a bottle rack or flat, giving storage flexibility.





# Experience intelligent cool



#### Fresh food for longer with sensor controlled cool.



#### freshSens

Fresh food guaranteed for longer. With conventional fridges, varying surrounding temperatures and the continuous opening of the refrigerator door lead to temperature changes inside the appliance. To ensure this does not affect the food inside, sensors immediately react to any changes. The freshSense sensors activate as soon as a change in temperature is registered and compensates for this change in an instant. Therefore, the temperature always remains within the optimum range, and food stays fresh and delicious for longer.



#### nverter motor

The intelligent inverter technology is a clever combination of the inverter motor and sensor. The sensors register every slight change in temperature or humidity inside the refrigerator, for example when the door is opened or warm food is stored. This information is then passed to the inverter motor, which adapts its need for energy accordingly. This means food can be cooled intelligently and energy efficiently, and thanks to the high-quality inverter motor, incredibly quietly.



#### superCod

Ensures that warmer food entering the fridge does not increase the fridge temperature, which can affect other food.



#### uperFreeze

superFreeze makes sure that warmer food added to the freezer does not raise the freezer temperature, stopping food partially defrosting.



#### Wrap around evaporator

This new technology creates more space in the freezer cavity, allowing for more innovations like bigBox for large food items, plus removable glass drawers.



#### ceTwister

Simply activate the iceTwister and receive up to 20 ice cubes at once right away. The water tank is very easy to remove for reliable refilling.

#### Explore more features that work around busy lifestyles.



#### safetyGlass shelves


All safety glass shelves are made from extra strong, easy-to-clean glass. If something tips over, the spillage is contained and does not spill into the rest of the refrigerator compartment.



#### Holiday mode

Holiday Mode will ensure that food in the freezer stays cold enough to maintain freshness whilst reducing its energy output. Our fridges also feature a warning alarm that signals when the door has been left open, ensuring that energy is not needlessly wasted and preserving the food inside.


Freestanding multi door / American fridge freezer

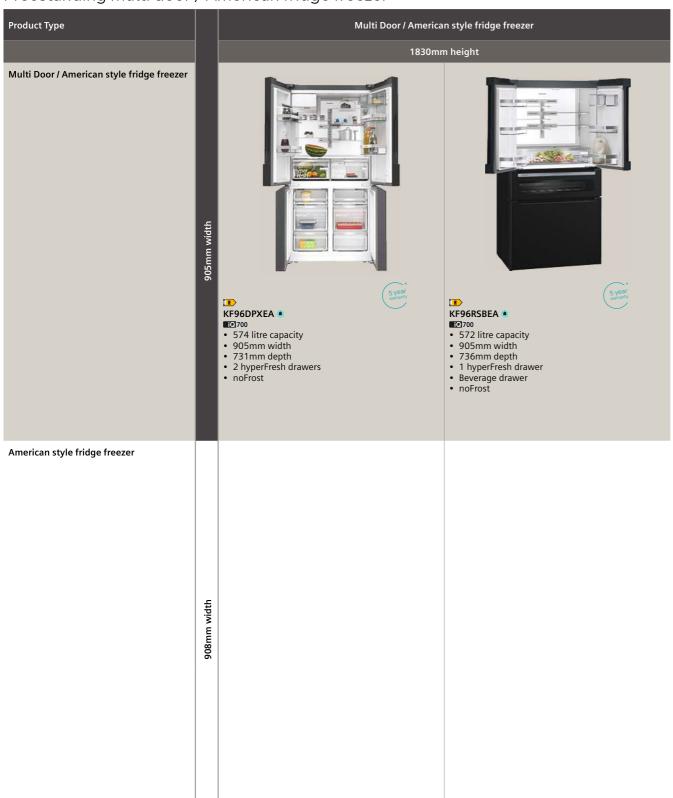





Freestanding fridge freezers

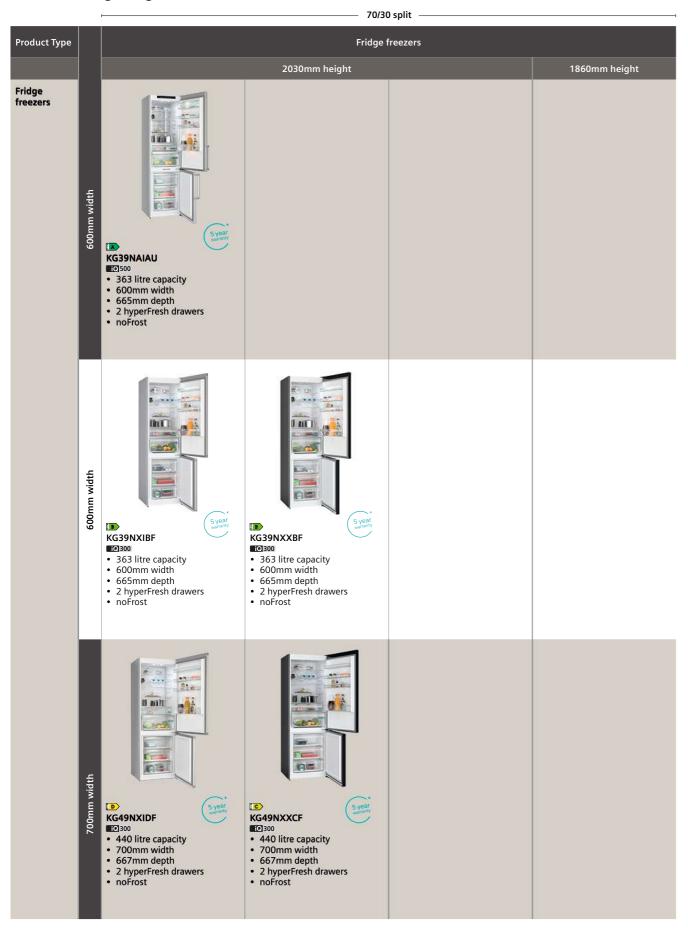

#### Freestanding single door fridges and freezers

Product Type		Fric	lges	Free	zers
		1860mr	n height	1860mr	n height
Single door fridges	600mm width	KS36VAXEP To500  • 346 litre capacity • 600mm width • 650mm depth • 1 hyperFresh drawer • 1 vegetable box	KS36VVIEPG 10300  346 litre capacity 600mm width 650mm depth 1 hyperFresh drawer lowFrost		
Single door freezers	600mm width			GS36NAXEP 10500  • 242 litre capacity • 600mm width • 650mm depth • noFrost	GS36NVIEPG  10300  • 242 litre capacity • 600mm width • 650mm depth • noFrost



# Wine cabinet





#### IQ 500 KW36KATGA

Freestanding wine cabinet Silver, glass door













#### Wine cabinet specifications

Appliance type	Freestanding wine cabinet
Design family	iQ 500
Model number	KW36KATGA
Design features	
Colour of door panels	Silver
Colour of side panels	Black
Type of glass door	3 glass panels, UV-filtered
Door handle type	Integrated veertical bar handle
Temperature display	Interior / Digital LED
Reversible door, hinged on right	
Home Connect / Built-in cameras	-
Key features – wine cabinet section	
Range of temperature (0°C)	7 - 19
Temperature zones	2
LED light	LED
Number of shelves	10
Number of oak shelves	8
Number of adjustable shelves	4
Presenter shelf and lighting	
Capacity in 0.75l (Bordeaux bottles)	199
Functions	
Door open warning signal/malfunction	
Child lock	
Performance & consumption	
Energy efficiency class	â G
Energy consumption <sup>1</sup> (kWh/annum)	155
Refrigerator net capacity (litres)	370
Climate Class <sup>2</sup>	SN-ST
Sabbath mode	=
Noise level (dB [A] re 1pW)	38
Noise level class	C
Height of product (mm)	1860
Width of product (mm)	600
Depth of product (mm)	610

 $<sup>\</sup>blacksquare$  Yes, model has this feature.  $\,-\,$  Feature not available for this model.

Data valid in this table as of April 2025. Subject to modification without prior notice.

 $<sup>^1</sup>$  Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone ST = designed to operate in ambient temperature of +16°C to 38°C

#### iQ 700 KF96RSBEA

Multi Door / American Style fridge freezer Black glass door, cast iron sides





#### Multi Door / American Style fridge freezer specifications



■ Yes, model has this feature. — Feature not available for this model.

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

#### 700 KF96DPXEA

Multi Door / American Style fridge freezer Brushed black steel anti-fingerprint



#### Multi Door / American Style fridge freezer specifications

Appliance type	Freestanding 90cm
Design family	iQ700
Model number	KF96DPXEA
Design features	
Colour of door panels	Brushed black steel anti-fingerprint
Colour of side panels	Cast iron
Style of handle	Horizontal and vertical integrated handle
Colour of handle	Black
noFrost	noFrost
Home Connect	
Food freshness system	
hyperFresh	2 x hyperFresh drawers
Key features – fridge section	
Product highlights	LED
superCool function	
Type of control	Electronic
Number of shelves	5
Number of adjustable shelves	4
Bottle shelves in fridge	1
Number of door bins / shelves	5
Temperature display	Digital
Warning signal door open	
Key features – freezer section	
superFreeze function	
Temperature adjustable in freezer	
Number of ice cube trays	Automatic ice cube maker
Ice dispenser features	Crushed ice, ice cubes, water, water filter
Number of freezer drawers	6
Additional information	
Energy efficiency class	<u>. E</u>
Energy consumption <sup>1</sup> (kWh/annum)	327
Total net capacity (litres)	574
Refrigerator net capacity (litres)	375
Freezer net capacity (litres)	199
Climate class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	39
Noise level class	C
Sabbath mode	
10 year compressor warranty	
Additional accessories included	1 x connection hose
Height of product (mm)	1830
Width of product (mm)	905
Depth of product (mm)	731

■ Yes, model has this feature. — Feature not available for this model.

 $^{\rm 1}$  Actual energy consumption will depend on how the appliance is used and where it is located.

<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26.. T&C's apply. Online registration required.







#### Multi Door / American Style fridge freezer specifications

Appliance type	Freestanding 90cm
Design family	iQ300
Model number	KF96NAXEAG
Design features	
Colour of door panels	Brushed black steel anti-fingerprint
Colour of sides	Cast iron
Style of handle	Horizontal and vertical integrated handle
Colour of handle	Black
noFrost	noFrost
Home Connect	
Food freshness system	
hyperFresh	2 x hyperFresh drawers
Key features – fridge section	
Product highlights	LED
superCool function	
Type of control	Electronic
Number of shelves	4
Number of adjustable shelves	3
Shelves for bottles	-
Number of door bins / shelves	5
Temperature display	Digital
Warning signal door open	
Key features – freezer section	
superFreeze function	
Temperature adjustable in freezer	
Number of ice cube trays	1
Ice dispenser features	-
Number of freezer drawers	6
Additional information	
Energy efficiency class	A-G
Energy consumption <sup>1</sup> (kWh/annum)	333
Total net capacity (litres)	605
Refrigerator net capacity (litres)	405
Freezer net capacity (litres)	200
Climate class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	38
Noise level class	C
Sabbath mode	
10 Year Compressor Warranty	
Additional accessories included	-
Height of product (mm)	1830
Width of product (mm)	905
Depth of product (mm)	731









#### Multi Door / American Style fridge freezer specifications

Appliance type	Freestanding 90cm
Design family	iQ300
Model number	KF96NVPEAG
Design features	
Colour of door panels	Brushed steel anti-fingerprint
Colour of sides	Chrome Inox-Metallic
Style of handle	Horizontal and vertical integrated handle
Colour of handle	Black
noFrost	noFrost
Home Connect	-
Food freshness system	
hyperFresh	2 x hyperFresh drawers
Key features – fridge section	
Product highlights	LED
superCool function	
Type of control	Electronic
Number of shelves	3
Number of adjustable shelves	2
Shelves for bottles	-
Number of door bins / shelves	5
Temperature display	Digital
Warning signal door open	
Key features – freezer section	
superFreeze function	•
Temperature adjustable in freezer	
Number of ice cube trays	1
Ice dispenser features	-
Number of freezer drawers	6
Additional information	
Energy efficiency class	A E
Energy consumption <sup>1</sup> (kWh/annum)	333
Total net capacity (litres)	605
Refrigerator net capacity (litres)	405
Freezer net capacity (litres)	200
Climate class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	38
Noise level class	C
Sabbath mode	
10 year compressor warranty	•
Additional accessories included	-
Height of product (mm)	1830
	905
Width of product (mm)	903

<sup>&</sup>lt;sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

<sup>&</sup>lt;sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

<sup>\*5</sup> year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

<sup>&</sup>lt;sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

<sup>&</sup>lt;sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

# Traditional American Style fridge freezer A ↑ G Model shown: KA93GAIDP American Style fridge freezer 198

#### iQ 500 KA93GAIDP

American Style fridge freezer Brushed steel anti-fingerprint







Temperature Display: Exterior Digital









American Style fridge freezer specifications

Appliance type	Freestanding 90cm	
Design family	iQ 500	
Model number	KA93GAIDP	
Design features		
Colour of door panels	Brushed steel anti-fingerprint	
Colour of sides	Grey	
Style of handle	Vertical bar handle	
Colour of handle	Silver	
noFrost	noFrost	
Home Connect		
Food freshness system		
hyperFresh	1 x vegetable box	
Key features – fridge section		
Product highlights	LED	
superCool function		
Type of control	Electronic	
Number of shelves	5.	
Number of adjustable shelves	<del></del>	
Shelves for bottles		
Number of door bins / shelves	5	
Temperature display	Digital	
Warning signal door open		
Key features – freezer section		
superFreeze function		
Temperature adjustable in freezer		
Number of ice cube trays	Automatic ice maker	
Ice dispenser features	Crushed ice, ice cubes, water filter	
Number of freezer drawers	2	
Additional information		
Energy efficiency class		
Energy consumption <sup>1</sup> (kWh/annum)	323	
Total net capacity (litres)	560	
Refrigerator net capacity (litres)	369	
Freezer net capacity (litres)	191	
Climate class <sup>2</sup>	SN-T	
Noise level (dB [A] re 1pW)	42	
Noise level class	D	
Sabbath mode	*	
10 Year Compressor Warranty		
Additional accessories included	1 x connection hose	
Height of product (mm)	1787	
Width of product (mm)	908	
Depth of product (mm)	707	

<sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

 $^{\star} \text{5 year warranty} \cdot \text{Offer dates: } \text{01.04.25} - \text{31.03.26}. \text{ T\&C's apply. Online registration required.}$ 



# Freestanding fridge freezers







#### iQ 500 KG39NAIAU

Freestanding fridge freezer **Brushed steel anti-fingerprint** 









#### Freestanding fridge freezer noFrost specifications

oFrost specifications	
Appliance type	Freestanding fridge freezer noFrost
Design family	iQ 500
Model number	KG39NAIAU
Design features	
Colour of door panels	Brushed steel anti-fingerprint
Colour of sides	Pearl grey
Style of handle	Vertical bar handle
Colour of handle	Inox metallic
noFrost	noFrost
Home Connect	~
Food freshness system	
hyperFresh	2 x hyperFresh drawers
Key features – fridge section	
Light	LED
superCool function	•
Type of control	Electronic
Number of shelves	5
Number of adjustable shelves	3
Number of door bins / shelves	3
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	
Key features – freezer section	
superFreeze function	_
Temperature adjustable in freezer	
Number of ice cube trays	1)
Bottle shelves in fridge	3
Additional information	
Energy efficiency class	<del>Å</del> A
Energy consumption¹ (kWh/annum)	104
Total net capacity (litres)	363
Freezer net capacity (litres)	103
Climate Class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	29
Noise level class	A
Sabbath mode	
10 Year Compressor Warranty	
Additional accessories included	1 x ice cube tray 1 x bottle support 1 x bottle cooler
Height of product (mm)	2030
Width of product (mm)	600
Depth of product (mm)	665

■ Yes, model has this feature. — Feature not available for this model.

 $^1$  Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of  $+10^{\circ}$ C to  $32^{\circ}$ C. Climate zone T = designed to operate in ambient temperature of  $+18^{\circ}$ C to  $43^{\circ}$ C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

















#### Freestanding fridge freezer noFrost specifications

Appliance type		Freestanding fridge freezers Total noFrost	
Design family	iQ300	ĭ <b>⊘</b> 300	iQ 300
Model number	KG49NXXCF	KG49NXIDF	KG39NXIBF
Design features			
Colour of door panels	Brushed black steel anti-fingerprint	Brushed steel anti-fingerprint	Brushed steel anti-fingerprint
Colour of sides	Cast iron	Pearl grey	Pearl grey
Style of handle	Integrated vertical handle	Integrated vertical handle	Integrated vertical handle
Colour of handle	-	-	-
noFrost	noFrost	noFrost	noFrost
Home Connect	-	-	-
Food freshness system			
hyperFresh	2 x hyperFresh drawers	2 x hyperFresh drawers	2 x hyperFresh drawers
Key features – fridge section			
Light	LED	LED	LED
superCool function			
Type of control	Electronic	Electronic	Electronic
Number of shelves	5	5	5
Number of adjustable shelves	3	3	3
Number of door bins / shelves	4	4	4
Type of shelves	Safety glass	Safety glass	Safety glass
Temperature display	Digital LED	Digital LED	Digital LED
Warning signal door open			
Bottle shelves in fridge			<u> </u>
Key features – freezer section			
superFreeze function			
Temperature adjustable in freezer			<b></b>
Number of ice cube trays	1	1	11
Bottle shelves in fridge	3	3	3
Additional information			
Energy efficiency class	Ĝ C	A D	â B
Energy consumption <sup>1</sup> (kWh/annum)	177	223	129
Total net capacity (litres)	440	440	363
Freezer net capacity (litres)	129	129	103
Climate Class <sup>2</sup>	SN-T	SN-T	SN-T
Noise level (dB [A] re 1pW)	35	35	33
Noise level class	В	В	В
Sabbath mode			
10 Year Compressor Warranty			<b>—</b>
Additional accessories included	1 x ice cube tray 1 x bottle support	1 x ice cube tray 1 x bottle support	1 x ice cube tray 1 x bottle support
Height of product (mm)	2030	2030	2030
Width of product (mm)	700	700	600
Depth of product (mm)	667	667	665

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.





#### Freestanding fridge freezer

Appliance type	
Design family	iQ 300
Model number	KG39NXXBF
Design features	
Colour of door panels	Brushed black steel anti-fingerprint
Colour of sides	Cast iron
Style of handle	Integrated vertical handle
Colour of handle	-
noFrost in fridge and freezer	noFrost
Home Connect	-
Food freshness system	
hyperFresh	2 x hyperFresh drawers
Key features – fridge section	
Light	LED
superCool function	•
Type of control	Electronic
Number of shelves	5
Number of adjustable shelves	3
Number of door bins / shelves	4
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	<b>—</b>
Bottle shelves in fridge	•
Key features – freezer section	
superFreeze function	•
Temperature adjustable in freezer	•
Number of ice cube trays	1
Bottle shelves in fridge	3
Additional information	
Energy efficiency class	A B
Energy consumption¹ (kWh/annum)	129
Total net capacity (litres)	363
Freezer net capacity (litres)	103
Climate Class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	33
Noise level class	В
Sabbath mode	•
10 Year Compressor Warranty	•
Additional accessories included	1 x ice cube tray 1 x bottle support
Height of product (mm)	2030
Width of product (mm)	600
Depth of product (mm)	665

<sup>■</sup> Yes, model has this feature. — Feature not available for this model.

 $<sup>^{\</sup>mbox{\tiny 1}}$  Actual energy consumption will depend on how the appliance is used and where it is located.

 $<sup>^2</sup>$  Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C. Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

 $<sup>^{\</sup>rm 1}$  Actual energy consumption will depend on how the appliance is used and where it is located. <sup>2</sup> Climate zone SN = designed to operate in ambient temperature of  $+10^{\circ}$ C to  $32^{\circ}$ C. Climate zone T = designed to operate in ambient temperature of  $+18^{\circ}$ C to  $43^{\circ}$ C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

# Upright single door fridges

#### IQ 500 KS36VAXEP

Freestanding fridge
Brushed black steel anti-fingerprint





Freestanding upright single door fridge specifications

Appliance type	Upright single door fridge
Design family	iQ 500
Model number	KS36VAXEP
Design features	
Colour of door panels	Brushed black steel anti-fingerprint
Colour of side panels	Cast iron
Style of handle	Vertical bar handle
Colour of handle	Stainless steel
noFrost in fridge and freezer	( <del>=</del> )
Home Connect	<b>22</b>
Food freshness system	
hyperFresh	1 x hyperFresh drawer 1 x vegetable box
Key features – fridge section	
Light	LED
superCool function	
Type of control	Electronic
Number of shelves	7
Number of adjustable shelves	4
Number of door bins / shelves	5
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	
Key features – freezer section	
superFreeze function	-
Temperature adjustable in freezer	
Number of ice cube trays	350
Number of freezer drawers	· ·
Additional information	
Energy efficiency class	<u>a</u> E
Energy consumption <sup>1</sup> (kWh/annum)	116
Total net capacity (litres)	346
Freezer net capacity (litres)	(4)
Climate Class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	39
Noise level class	c
Sabbath mode	
10 Year Compressor Warranty	•
Additional accessories included	1 x bottle support
Height of product (mm)	1860
Width of product (mm)	600
Depth of product (mm)	650

■ Yes, model has this feature. — Feature not available for this model.

 $^1$ Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10 $^\circ$ C to 32 $^\circ$ C. Climate zone T = designed to operate in ambient temperature of +18 $^\circ$ C to 43 $^\circ$ C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.





Freestanding upright single door fridge specifications

ridge specifications	
Appliance type	Upright single door fridge
Design family	iQ 300
Model number	KS36VVIEPG
Design features	
Colour of door panels	Brushed steel anti-fingerprint
Colour of side panels	Pearl grey
Style of handle	Vertical bar handle
Colour of handle	Stainless steel
noFrost in fridge and freezer	-
Home Connect	-
Food freshness system	
hyperFresh	1 x hyperFresh drawer
Key features – fridge section	
Light	LED
superCool function	
Type of control	Electronic
Number of shelves	7
Number of adjustable shelves	5
Number of door bins / shelves	5
Type of shelves	Safety glass
Temperature display	Digital LED
Warning signal door open	-
Bottle shelves in fridge	•
Key features – freezer section	
superFreeze function	-
Temperature adjustable in freezer	-
Number of ice cube trays	-
Number of freezer drawers	-
Additional information	
Energy efficiency class	Î D
Energy consumption¹ (kWh/annum)	116
Total net capacity (litres)	346
Freezer net capacity (litres)	-
Climate Class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	39
Noise level class	С
Sabbath mode	-
10 Year Compressor Warranty	
Additional accessories included	1 x bottle support
Height of product (mm)	1860
Width of product (mm)	600
Depth of product (mm)	650

<sup>■</sup> Yes, model has this feature. — Feature not available for this mode

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

<sup>&</sup>lt;sup>1</sup> Actual energy consumption will depend on how the appliance is used and where it is located.

<sup>2</sup> Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.

Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

# Upright single door freezers

#### 5 year warranty







#### 10,500 GS36NAXEP

Freestanding freezer

Brushed black steel anti-fingerprint



Freestanding upright single door fridge specifications

Appliance type	Upright single door freezer
Design family	iQ 500
Model number	GS36NAXEP
Design features	
Colour of door panels	Brushed black steel anti-fingerprint
Colour of side panels	Cast iron
Style of handle	Vertical bar handle
Colour of handle	Stainless steel
noFrost	noFrost
Home Connect	
Food freshness system	
hyperFresh	-
Key features – fridge section	
Light	=
superCool function	(
Type of control	Electronic
Number of shelves	(5)
Number of adjustable shelves	( to the second
Number of door bins / shelves	
Type of shelves	( <del>=</del> )
Temperature display	Digital LED
Warning signal door open	•
Bottle shelves in fridge	( <del>-</del>
Key features – freezer section	
superFreeze function	
Temperature adjustable in freezer	
Number of ice cube trays	Twist ice box
Number of freezer drawers	4
Additional information	
Energy efficiency class	å E
Energy consumption¹ (kWh/annum)	234
Total net capacity (litres)	242
Freezer net capacity (litres)	242
Climate Class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	39
Noise level class	С
Sabbath mode	
10 Year Compressor Warranty	
Additional accessories included	2 x ice blocks 1 x twist ice box
Height of product (mm)	1860
Width of product (mm)	600
Depth of product (mm)	650

■ Yes, model has this feature. — Feature not available for this model.

 $^1$ Actual energy consumption will depend on how the appliance is used and where it is located.  $^2$  Climate zone SN = designed to operate in ambient temperature of +10 $^{\circ}$ C to 32 $^{\circ}$ C. Climate zone T = designed to operate in ambient temperature of +18 $^{\circ}$ C to 43 $^{\circ}$ C.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

Freestanding upright single door fridge specifications

Appliance type	Upright single door freezer
Design family	iQB00
Model number	GS36NVIEPG
Design features	
Colour of door panels	Brushed steel anti-fingerprint
Colour of side panels	Pearl grey
Style of handle	Vertical bar handle
Colour of handle	Stainless steel
noFrost in fridge and freezer	noFrost
Home Connect	<b>24</b>
Food freshness system	
hyperFresh	<del>-</del>
Key features – fridge section	
Light	(=)
superCool function	161
Type of control	Electronic
Number of shelves	( <del>-</del> 2)
Number of adjustable shelves	349
Number of door bins / shelves	
Type of shelves	(4)
Temperature display	Digital LED
Warning signal door open	
Bottle shelves in fridge	(4)
Key features – freezer section	
superFreeze function	
Temperature adjustable in freezer	
Number of ice cube trays	2
Number of freezer drawers	5
Additional information	· _
Energy efficiency class	å E
Energy consumption¹ (kWh/annum)	234
Total net capacity (litres)	242
Freezer net capacity (litres)	242
Climate Class <sup>2</sup>	SN-T
Noise level (dB [A] re 1pW)	39
Noise level class	C
Sabbath mode	
10 Year Compressor Warranty	•
Additional accessories included	2 x Ice cube tray 2 x Ice blocks
Height of product (mm)	1860
Width of product (mm)	600
Depth of product (mm)	650

■ Yes, model has this feature. — Feature not available for this model.

<sup>1</sup>Actual energy consumption will depend on how the appliance is used and where it is located.


<sup>2</sup>Climate zone SN = designed to operate in ambient temperature of +10°C to 32°C.

Climate zone T = designed to operate in ambient temperature of +18°C to 43°C.

Data valid in this table as of April 2025. Subject to modification without prior notice.


\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

#### Multi Door / American Style fridge freezer KF96RSBEA





A: Front is adjustable from 1830 to 1847 mm, with front levelling feet fully extended

B: Add 25 mm for fixed spacers on back



A: Front is adjustable from 1830 to 1847 mm, with front levelling feet fully







depth

B: Wall


Drawers can be pulled and taken out with door open to 90°




#### Multi Door / American Style fridge freezer KF96DPXEA




- A: Front is adjustable 1830–1847 mm, with front levelling feet fully extended
- B: Add 25 mm for fixed spacers on back
- C: Water connection position




A: Front is adjustable 1830–1847 mm, with front levelling feet fully extended







#### Multi Door / American Style fridge freezers KF96NAXEAG and KF96NVPEAG




A: Front is adjustable from 1830 to 1847, with front levelling feet fully extended
 B: Add 25 for fixed spacers on back




A: Front is adjustable from 1830 to 1847, with front levelling feet fully extended









#### American Style fridge freezer KA93GAIDP

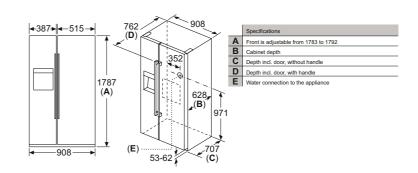





# Innovative features for sparkling results

### Siemens built-in dishwashers feature modern design and innovative ideas for seamless living.

Siemens dishwashers are equipped with practical innovations such as varioSpeed Plus, which washes and dries your dishes three times faster than the average cycle, and Zeolith® drying technology that transforms humidity into heat for gentle and effective drying results.

With maximum flexibility from adjustable baskets and foldable racks to stylish innovations such as sideLight and timeLight floor projection, Siemens dishwashers provide the perfect balance between modern design and innovative technology. The ideal solution for family dinners or hosting parties for friends with the assurance of sparkling clean dishes and glasses.



#### Siemens built-in dishwasher warranties:



#### 5 year warranty

A five year warranty is available on all built-in dishwasher models listed in this brochure, to protect against manufacturing and material faults during this warranty period.

\*Offer dates: 01.04.25 – 31.03.26. Registration required. For full T&Cs and qualifying appliances visit siemens-home. bsh-group.com/uk/customer-service/siemens-warranties



#### 10 Year Anti-Rust Warranty

All Siemens dishwashers purchased from the 1st January 2012 onwards have a 10 Year Anti-Rust Warranty to protect against rust in the inner cavity of the appliance.



#### Lifetime AquaStop Warranty

All Siemens built-in dishwashers listed in this brochure have a lifetime AquaStop warranty to protect against water damage caused by a defective AquaStop system.

To find out more about warranty and for registration, please visit: UK: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: siemens-home.bsh-group.com/ie/customer-service/warranty



# Key dishcare features

All our dishwashers feature glass care technology, they regulate the degree of hardness in the water to help optimise the protection of glasses, as soft water can cause glass corrosion.

The priority zone for gentle and thorough washing of the most valuable glasses.



#### glassZone

Thanks to the glassZone, even the most valuable of glasses can go in the dishwasher with peace of mind. The six integrated nozzles ensure continuous but gentle water supply which enables thorough cleaning without damaging sensitive materials. In addition, integrated soft anti-slip elements give a secure hold, protect against mechanical stress and prevent damage to glass rims. Available on iQ700 and iQ500 dishwashers.

Create the perfect space in the dishwasher for any load.



#### rackMatic™

Available across all storage solutions, this feature conveniently allows the user to raise and lower the height of the top basket to create more or less space, even when the dishwasher is loaded.





#### Storage solutions for added flexibility and better results.



#### varioDrawer

By adding a third shelf for cutlery, varioDrawer removes the need for a cutlery basket and creates more space.



#### varioFlex basket system

The varioFlex basket has 2 flexible areas in the top rack and 4 in the bottom, providing extra flexibility within the dishwasher to create more space for larger items.





# flexComfort basket

#### flexComfort basket system

These baskets have the ability to fold down certain compartments within the cavity for extra room – the top rack has 2 areas that can be adjusted for extra flexibility, whilst the bottom basket has 8 areas that can be adjusted to create more space. The inside of your dishwasher is constantly adaptable. Anti-slip elements and stemware support hold have also been added, meaning it has never been as easy to load your dishwasher.





#### flexComfort Pro basket system

The flexComfort Pro basket system is designed to hold larger plates and allows you to create extra space for pots and pans with ease. Choose from up to 6 flexible areas in the top rack and up to 8 flexible areas in the bottom basket to create extra space. Blue touchpoints inside the baskets indicate all the adjustment options available at a glance, and the easyGlide wheels on the upper basket make loading the dishwasher even easier. Other features such as anti-slip elements and stemware support hold means you can easily and securely load your glassware and get on with your day, chore free.



213



#### Floor projection displays.



#### infoLight

Projects a beam of light onto the floor to show the dishwasher is running. This prevents needing to open the door while the cycle is still active to see if it is finished.



#### timeLight

Useable on any colour surface, the innovative timeLight projects the remaining time and other essential dishwasher cycle information onto the floor, making it easy to check on the cycle status.

With quiet dishwashers, this solution shows the dishwasher is running and how long is left at a glance, to avoid having to open the door mid-cycle to check.

#### Light up the dishwasher.



#### emotionLight

Creates a soothing atmosphere by using LED lights to cast a soft glow on sparkling-clean glasses. When the dishwasher door is open, it emits a cool blue light, and automatically turns off when the door is closed. This adds an elegant touch to your kitchen environment.




#### sideLight

With the sideLight, it is easy to immediately see whether the washing programme is still running. During operation, the blue light strip illuminates the furniture gap on the left hand side of the dishwasher. Only available on selected models.









#### Added kitchen convenience.



#### autoOpen dry

Gentle drying thanks to autoOpen dry. During the drying process, the door opens automatically allowing dishes to naturally dry without the need for additional energy.



#### Zeolith advanced drying technology

Zeolith®, a form of zeolite mineral, has the astonishing ability to absorb moisture and convert it to heat. Zeolith® is stored in the depths of the dishwasher. It regenerates itself and keeps working for the lifetime of the machine, so it never needs replacing. The heat produced is used for the drying cycle, with no additional energy required, leading to excellent drying results with less energy usage than models without Zeolith® technology.



#### Silence programme

When the Silence programme is selected the dishwasher's noise level is reduced by 2-3dB. This is achieved by decreasing water pressure and extending run time. Available on iQ700 and iQ500 dishwashers.



#### Silence on Demand

If silence is needed during the wash cycle, the dishwasher can be paused for up to 30 minutes by using Silence on Demand with Siemens Home Connect. This can be activated via the app or voice control. Available on iQ700 and iQ500 dishwashers.



#### Hygiene Plus

Great for cleaning chopping boards, food containers and utensils. It heats up to extra high temperature in the final rinse for maximum hygiene, regardless of the chosen cycle.\*

\*Not on delicate programme.



#### Water consumption

Our built-in dishwashers' lowest water usage programme is 7.7L per cycle\* if the Eco 50 programme is selected, for the most resource efficient option.


\*Based on SN95ZX61CG



#### **Machine Care with Siemens dishwashers**

For excellent results when washing and drying, looking after the dishwasher correctly is important. All of our integrated Siemens dishwashers include the Machine Care Programme.

This programme is designed to be used together with a dishwasher cleaning detergent and provides a short, high temperature, high pressure wash designed to remove limescale and grease build up inside the dishwasher and outlet pipes. The dishwasher will send a reminder every 30 cycles or so to run this programme, to keep the appliance running as efficiently as possible.

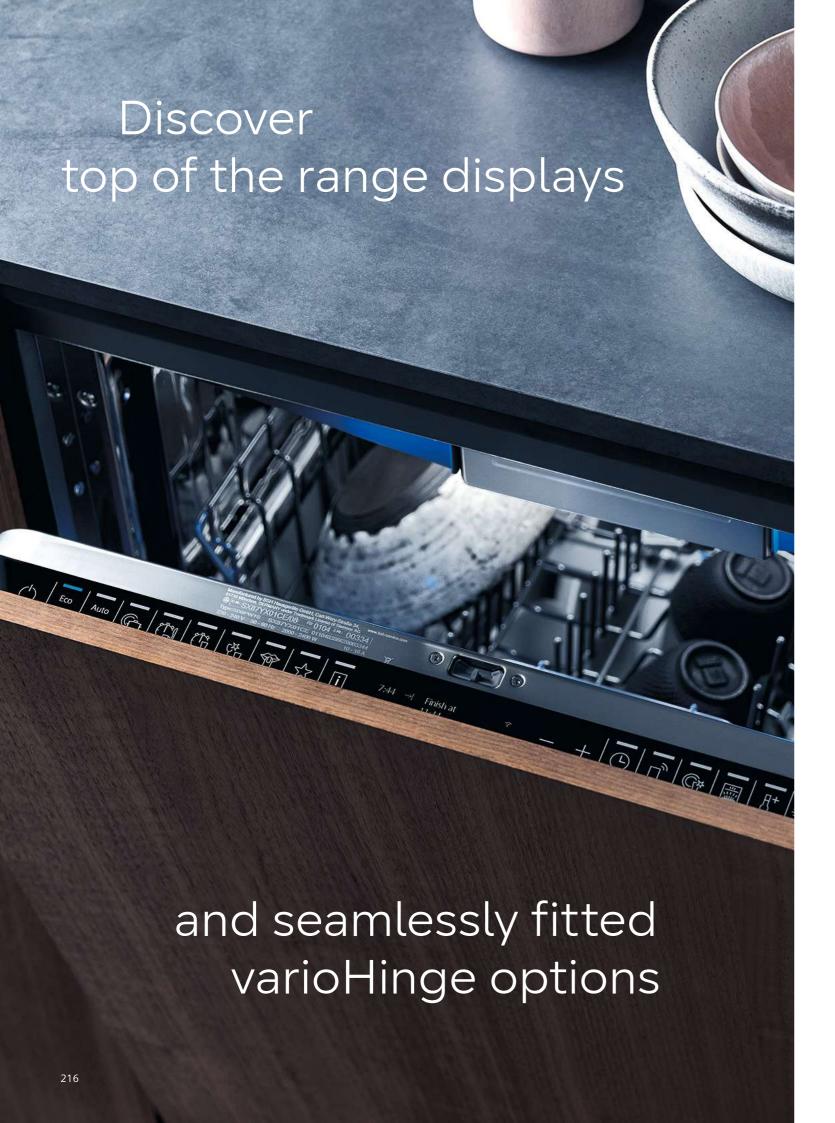

#### Multiple choices for display type to suit every need.

#### Black touch control with TFT display and real-time clock

The clear, high resolution touch controlled TFT display makes it easy to select programmes, settings and check the dishwasher status at a glance. Thanks to the real-time clock, it is now possible to set the exact time the dishes will be ready, for extra convenience. Perfect for delivering warm plates to the dinner table.

#### Black touch control with LED display

With the same top of the range sleek black touch control panel, it has a clear LED display screen which displays the programme setting and duration time.

#### Black / Stainless Steel touch control button and LED display

The two zone design is stylish and functional, with direct button selection and a white LED display, providing clear status information. When a programme and option is selected, a blue LED illuminates under the button.

#### Black push button control with toggle and LED display

With black buttons, a toggle screen and an LED screen, which displays programme settings and duration time, this easy to use interface is practical and stylish.

#### Stainless steel push button control and LED display

With stainless steel buttons and an LED screen which displays programme settings and duration time, this easy to use interface is practical and stylish.



Model shown: SN97TX02CE fully integrated dishwasher



Model shown: SN95ZX61CG fully integrated dishwasher



Model shown: SX73HX10VG fully integrated extra height 86.5cm dishwasher



Model shown: SN61HX03KG fully integrated dishwasher



Model shown: SR93EX25MG 45cm fully integrated dishwasher

#### varioHinge. The ideal solution for extra long cabinet doors.



varioHinge enables the furniture panel to slide up the appliance door as it opens, avoiding collision with the plinth. Siemens has six built-in 60cm dishwasher models SN95YX02CG, SN95ZX61CG, SN95EX12CG, SX73HX10VG, SN61HX03KG, SN61HX02TG - plus a 45cm dishwasher SR93EX25MG - with varioHinge.

varioHinge ensures flexible dishwasher installation inline with the design of the kitchen. Perfect for cabinet doors in handle-less kitchens, or designs with low baseboards and longer cabinet panels as the varioHinge allows the cabinet door to be pushed upwards when opened to avoid the door catching. The varioHinge reduces the bottom gap between cabinet doors too for a seamless finish to the kitchen. These appliances are suitable for use with a 50mm plinth.





Attractive design for high installation thanks to minimal gap size made possible by varioHinge.



With varioHinge, a lower plinth height is possible.



Built-in dishwashers | Home Connect

## Live in the moment with the help of a smart dishwasher.

There are more important things in life than worrying about washing dishes and replenishing dishwasher tabs. Siemens smart dishwashers provide more efficient results, additional programmes and enhanced control.

There are a number of great features to choose from in the Siemens Home Appliances App, such as Speed on Demand and Silence on Demand. The app allows the selection of favourite programmes and option combinations to provide the flexibility to alter wash cycle options from anywhere at anytime.

#### Perfectly tailored dishcare

The Intelligent Programme adapts the dish washing process to individual needs. After the programme is finished, the results and duration can be rated via the Siemens Home Appliances App. From this, the dishwasher will automatically adapt the settings and offer several alternatives, such as more energy efficient options. It also has the option to monitor water and energy consumption.

#### Never run out of dishwasher tablets again


By linking a smart dishwasher with the Smart Finish autoreplenishment service, there will never be a situation where there are no dishwasher tablets again. The Smart Finish service keeps track of tablet stock and will automatically re-order more when it is running low.

#### Always use the perfect programme

By using the Siemens Home Appliances App to start a programme, it will be easy to see a detailed description of each programme, as well as energy and water usage indicators. Either pick the best programme for the specific load, or let our Programme Assistant help pick the recommended option based on the requirements.

#### **Programme Download**

Paired with the Siemens Home Appliances App, Siemens' dishwashers can always be kept up to date with software updates. They can even be personalised by downloading free additional programmes available via the Siemens Home Appliances App. Whether it is more intense programmes, intelligent programmes or even faster programmes, there are additional programmes – up to 10 depending on the model – available to suit everyone's need. Once downloaded they can also be added to favourites for even quicker access.

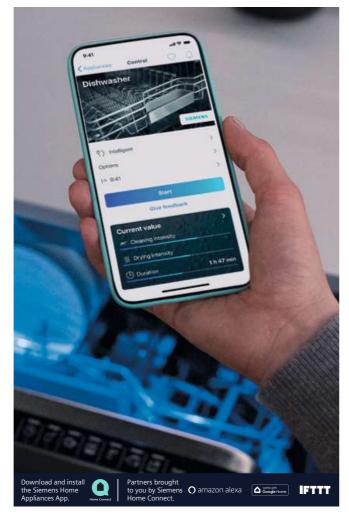

Learn more about Siemens Home Connect by visiting Siemens Home UK: www.siemens-home.bsh-group.com/uk

Or scan the QR code to learn more about our smart dishwasher appliances.







#### Features available on all built-in dishwasher models.



#### varioSpeed Plus

Use the varioSpeed Plus button to run the dishwasher significantly faster without compromising on wash quality.



#### Speed on Demand

An advanced functionality of varioSpeed Plus that cleans and dries the dishes in the shortest possible time for individual needs. This option can be selected, even if the programme is running, via the Siemens Home Appliances App.



#### dosageAssist

Quickly and evenly dissolves dishwasher tablets throughout the entire machine, leaving no mess to clean at the end of the cycle. This also prevents the tablet getting stuck in the dishware to ensure no cleaning product residue is left after the cycle.



#### extraDry

The extraDry option can be added to any programme and will extend the drying cycle. This can be useful for harder to dry loads.



#### intensiveZone

Delicate items can be cleaned together in the same wash as pots and pans. The intensiveZone increases the spray pressure and temperature in the bottom basket to handle burnt on pans, whilst more delicate items can be washed safely in the top basket.



#### aquaSensor

Ensures that the optimum temperature is used depending on how dirty the dishes are, so that they are left perfectly clean all year round.



#### Heat exchanger

Protects glasses from cracking by using gentle water heating. Heat generated during the wash cycle is used to pre-heat the rinsing water to stop glasses being put under stress.



#### loadSensor

The loadSensor feature helps to ensure that dishes are cleaned thoroughly by ensuring that the optimum amount of water is flowing through the dishes during the cycle.



#### Favourite

The Favourite button makes using the dishwasher even more personal. Simply enter the most used combination of programmes and options, and then start them conveniently at the touch of a button, via the Siemens Home Appliances App.

#### A modern handleless kitchen.



#### openAssis

With door openAssist, fully integrated dishwashers can be opened by touching the front of the unit to make loading and unloading easy. This removes the need for a handle and is the ideal choice for sleek designer kitchens. With this feature, it is also possible to implement a child lock so that the appliance requires two gentle touches before opening.



# Dishwasher product overview

#### Fully integrated dishwasher range

Fully integrated dishwasher range								
Display type	60cm dishwasher	60cm dishwasher	60cm dishwasher	60cm dishwasher				
	81.5cm height	81.5cm height	81.5cm height	81.5cm height				
Touch control + TFT	SN97TX02CE	varioHinge	varioHinge	varioHinge				
Touch control + LED		Syen	South					
TOUCH COILION + LED		SN95YX02CG • T0500 Black • 14 place settings • 9.5 litres • varioDrawer • Zeolith • autoOpen dry • flexComfort • sideLight (Blue) • emotionLight • door openAssist • glassZone	SN95ZX61CG  SN95ZX61CG  Slack  13 place settings  7.7 litres  varioDrawer  Zeolith flexComfort sideLight (Blue) emotionLight door openAssist glassZone	SN95EX12CG  SN95EX				
Push buttons + LED								
Toggle control + LED								




Home Connect				
60cm dishwasher	60cm dishwasher	45cm dishwasher	60cm dishwasher	60cm dishwasher
81.5cm height	86.5cm height	81.5cm height	81.5cm height	81.5cm height
varioHinge	varioHinge	varioHinge	Fixed hinge	Fixed hinge
SN73HX10VG •  10300 Black / Stainless Steel • 14 place settings • 9 litres • varioDrawer • varioFlex • infoLight (Blue) • Polinox	SX73HX10VG •  SX73HX10VG •  Signor Steel  14 place settings  9 litres  • varioDrawer  • varioFlex  • infoLight (Blue)  • Polinox	SR93EX25MG • To 300 Black / Stainless Steel (available May 2024) • 10 place settings • 8.7 litres • varioDrawer • varioFlex • infoLight (Blue) • autoOpen dry • door openAssist		
			SN61HX03KG  SN61HX	SN61HX02TG  SN61HX

## 60cm dishwashers

#### 1Q 700 SN97TX02CE

#### 60cm fully integrated dishwasher





#### flexComfort Pro basket system

flexComfort Pro baskets create extra room for pots and pans. With an optimised lower basket design for large plates and adjustable sides highlighted with blue touchpoints, the dishwasher can adapt to any load quickly and easily.

#### varioDrawer included

Selected models include a varioDrawer, providing a third loading level for cutlery and removing the need for a cutlery basket. This creates more room for large pots and pans below and includes space for small items such as ladles and espresso cups.



#### 60cm fully integrated dishwasher specifications

Appliance Type Design family	60cm fully integrated dishwasher iQ 700
	1906900/60794600000
Model number	SN97TX02CE
Control panel colour	Black
Height (cm) / Hinge type	81.5 / varioHinge
Design features	
Drying system	Zeolith / autoOpen dry
Home Connect Wi-Fi connectivity	
Control panel type	Touch control + TFT
Basket description	flexComfort Pro
varioDrawer (3rd loading level)	varioDrawer
Status indicator	sideLight (Blue)
Door openAssist	
glassZone	
Glass care technology	
Anti-slip protection / stemware support upper basket	<b>■</b> /■
Adjustable upper basket	rackMatic™ 3-stage
Number of flip tines in upper / lower basket	618
Cup shelves upper / lower baskets	212
Cutlery holder lower basket	_
Largest loadable dish upper / lower basket (cm)	21 / 30
aguaSensor	21733
Real-time clock	<del></del>
Start delay time max hours	24
emotionLight (blue interior lighting)	24
	Accustic
End of cycle indicator	Acoustic
Salt / Rinse aid light indicator	
Self cleaning filter system	
Flood protection system	AquaStop 24h
Safety features	Door lock
Programmes / Functions	
List of programmes	Intelligent 40°C, Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 60°C, brilliantShine 40° Silence 50°C, Favourite, Machine Care
	TO STATE OF THE PARTY OF THE PA
Additional special options	Remote Start, Shine & Dry, intensiveZone, Hygiene Plus, varioSpeed Plus
Technical information	Hygiene Plus, varioSpeed Plus
Technical information Reference programme for measurements	Hygiene Plus, varioSpeed Plus Eco 50°C
Technical information Reference programme for measurements Energy efficiency class <sup>1</sup>	Hygiene Plus, varioŠpeed Plus Eco 50℃
Technical information Reference programme for measurements Energy efficiency class¹ Energy² / water² (kWh / litres)	Hygiene Plus, varioSpeed Plus Eco 50℃ A 54 I 9.5
Technical information Reference programme for measurements Energy efficiency class¹ Energy² / water³ (kWh / litres) Load capacity (place settings)	Hygiene Plus, varioSpeed Plus Eco 50°C (a A ) 54 / 9.5 14
Technical information Reference programme for measurements Energy efficiency class¹ Energy² / water² (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 / 9.5  14  4:55
Technical information Reference programme for measurements Energy efficiency class¹ Energy² / water³ (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 <i>I</i> 9.5  14  4:55  42
Technical information  Reference programme for measurements  Energy efficiency class¹  Energy² / water² (kWh / litres)  Load capacity (place settings)  Programme duration⁴ (h:min)  Noise level (dB [A] re 1pW)  Noise efficiency class  Noise level (silence programme) (dB [A] re 1pW)	Hygiene Plus, varioSpeed Plus  Eco 50℃  A  54 / 9.5  14  4:55  42  B  41
Technical information Reference programme for measurements Energy efficiency class¹ Energy² / water² (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise level (dielnce programme) (dB [A] re 1pW) Length of electrical supply cord (cm)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 / 9.5  14  4:55  42  8  41  175
Technical information Reference programme for measurements Energy efficiency class¹ Energy² / water² (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class Noise level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length inlet / outlet hose (cm)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 / 9.5  14  4:55  42  B  41  175  165 / 190
Technical information Reference programme for measurements Energy efficiency class¹ Energy² / water² (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class Noise level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Maximum height for installation (mm)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 / 9.5  14  4:55  42  B  41  175  165 / 190  875
Technical information Reference programme for measurements Energy efficiency class¹ Energye¹ (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class Noise level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Maximum height for installation (mm) Maximum height adjustability feet (mm)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 / 9.5  14  4:55  42  B  41  175  165 / 190  875  60
Technical information Reference programme for measurements Energy efficiency class¹ Energy² / water² (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class Noise level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Maximum height adjustability feet (mm) Maximum width for installation (mm)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 / 9.5  14  4:55  42  8  41  175  165 / 190  875  60  600
Technical information Reference programme for measurements Energy efficiency class¹ Energy efficiency class¹ Energy² / water² (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class Noise level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Maximum height for installation (mm) Maximum width for installation (mm) Height of the product (mm)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 / 9.5  14  4:55  42  8  41  175  165 / 190  875  60  600  815
Technical information Reference programme for measurements Energy efficiency class¹ Energy² / water² (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class Noise level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length of electrical supply cord (cm) Maximum height for installation (mm) Maximum height adjustability feet (mm) Maximum width for installation (mm) Height of the product (mm) Width / Depth of the product (mm)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 / 9.5  14  4:55  42  8  41  175  165 / 190  875  60  600  815  598 / 550
Technical information Reference programme for measurements Energy efficiency class¹ Energye' I water¹ (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class Noise level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Maximum height for installation (mm) Maximum width for installation (mm) Height of the product (mm) Width / Depth of the product (mm) Net weight / Gross weight (kg)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 / 9.5  14  4:55  42  B  41  175  165 / 190  875  60  600  815  598 / 550  42 / 44
Technical information Reference programme for measurements Energy efficiency class¹ Energy efficiency class¹ Energy² / water² (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class Noise level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Maximum height for installation (mm) Maximum width for installation (mm) Height of the product (mm) Width / Depth of the product (mm) Net weight / Gross weight (kg) Water softener³	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 / 9.5  14  4:55  42  8  41  175  165 / 190  875  60  600  815  598 / 550  42 / 44
Technical information Reference programme for measurements Energy efficiency class¹ Energy efficiency class¹ Energy efficiency class¹ Energy efficiency class¹ Energy el water³ (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise level (dB [A] re 1pW) Noise level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length of electrical supply cord (cm) Maximum height for installation (mm) Maximum height adjustability feet (mm) Maximum width for installation (mm) Height of the product (mm) Width / Depth of the product (mm) Net weight / Gross weight (kg) Water softener³ Maximum accepted water hardness ("DH)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A 54 / 9.5  14 4:55 42 B 41 175 165 / 190 875 60 600 815 598 / 550 42 / 44
Technical information Reference programme for measurements Energy efficiency class¹ Energy² / water³ (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class Noise level (silence programme) (dB [A] re 1pW) Length of electrical supply cord (cm) Length inlet / outlet hose (cm) Maximum height for installation (mm) Maximum width for installation (mm) Height of the product (mm) Width / Depth of the product (mm) Net weight / Gross weight (kg) Water softener³ Maximum accepted water hardness ("DH) Maximum temperature for water intake ("C)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A  54 / 9.5  14  4:55  42  8  41  175  165 / 190  875  60  600  815  598 / 550  42 / 44
Technical information  Reference programme for measurements  Energy efficiency class¹  Energy² / water² (kWh / litres) Load capacity (place settings)  Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class  Noise level (dis [A] re 1pW) Length of electrical supply cord (cm) Length of electrical supply cord (cm) Maximum height for installation (mm) Maximum height for installation (mm) Height of the product (mm) Width / Depth of the product (mm) Net weight / Gross weight (kg) Water softener² Maximum accepted water hardness ("DH)	Hygiene Plus, varioSpeed Plus  Eco 50°C  A 54 / 9.5  14 4:55 42 B 41 175 165 / 190 875 60 600 815 598 / 550 42 / 44

- <sup>1</sup> On an energy-efficiency class scale from A to G.
- <sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco programme).
  <sup>3</sup> Water consumption in litres/operating cycle (using Eco programme).
- Duration of Eco programme.
  We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmo/litre (7.0°e) and the water softener in
- the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to %" screwed joint.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.



#### 60cm fully integrated dishwasher specifications

Available May 2025

Appliance Type	60cm fully integrated dishwashers						
Design family	iQ500	iQ 500	iQ 500	iQ300			
Model number	SN95YX02CG	SN95ZX61CG	SN95EX12CG	SX73HX10VG			
Control panel colour	Black	Black	Black	Black / Stainless Steel			
Height (cm) / Hinge type	81.5 / varioHinge	81.5 / varioHinge	81.5 / varioHinge	86.5 / varioHinge			
Design features							
Drying system	Zeolith / autoOpen dry	Zeolith	autoOpen dry / Heat exchanger	Heat exchanger			
Home Connect Wi-Fi connectivity							
Control panel type	Touch control + LED	Touch control + LED	Touch control + LED	Push buttons + LED			
Basket description	flexComfort	flexComfort	flexComfort	varioFlex			
varioDrawer (3rd loading level)	varioDrawer	varioDrawer	varioDrawer	varioDrawer			
Status indicator	sideLight (Blue)	sideLight (Blue)	sideLight (Blue)	infoLight (Blue)			
Door openAssist				-			
glassZone				_			
Glass care technology							
Anti-slip protection / stemware support upper basket	■/■	■/■	■/■	-1-			
Adjustable upper basket	rackMatic™ 3-stage	rackMatic™ 3-stage	rackMatic™ 3-stage	rackMatic™ 3-stage			
Number of flip tines in upper / lower basket	2/8	2/8	2/8	2/4			
Cup shelves upper / lower baskets	2/2	2/2	2/2	21-			
Cutlery holder lower basket	-	-	-	-			
Largest loadable dish upper / lower basket (cm)	21 / 30	21 / 30	21 / 30	21 / 30			
aquaSensor							
Real-time clock	-	-	-	-			
Start delay time max hours	24	24	24	24			
emotionLight (blue interior lighting)				-			
End of cycle indicator	Acoustic	Acoustic	Acoustic	Acoustic			
Salt / Rinse aid light indicator	■/■	■/■	■ / ■	■/■			
Self cleaning filter system							
Flood protection system	AquaStop 24h	AquaStop 24h	AquaStop 24h	AquaStop 24h			
Safety features	Door lock	Door lock	Door lock	Door lock			
Programmes / Functions							
List of programmes	Intelligent 40°C, Fco 50°C, Auto 45-65°C.	Eco 50°C. Auto 45-65°C. Intensive 70°C.	Fco 50°C, Auto 45-65°C, Intensive 70°C.	Fco 50°C. Auto 45-65°C. Intensive 70°			

	brilliantShine 40°C, Silence 50°C, Favourite, Machine Care	brilliantShine 40°C, Silence 50°C, Favourite, Machine Care	Silence 50°C, Favourite, Machine Care	Machine Care
Additional special options	Remote Start, Shine & Dry, Remote Start, Shine & Dry, Remote Start, Shine & Dry, IntensiveZone, varioSpeed Plus IntensiveZone, varioSpeed Plus		Remote Start, intensiveZone Half Load, varioSpeed Plus	
Technical information				
Reference programme for measurements	Eco 50°C	Eco 50°C	Eco 50°C	Eco 50°C
Energy efficiency class <sup>1</sup>	â A	Ĉ A Ĉ A		<del>a</del> D
Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres)	54 / 9.5	74 /7.7	5419	84/9
Load capacity (place settings)	14	13	14	14
Programme duration <sup>4</sup> (h:min)	4:55	3:45	4:30	3:45
Noise level (dB [A] re 1pW)	44	44	42	46
Noise efficiency class	В	В	В	В
Noise level (silence programme) (dB [A] re 1pW)	43	42	41	
Length of electrical supply cord (cm)	175	175	175	175
Length inlet / outlet hose (cm)	165 / 190	165 / 190	165 / 190	165 / 190
Maximum height for installation (mm)	875	875	875	925
Maximum height adjustability feet (mm)	60	60	60	60
Maximum width for installation (mm)	600	600	600	600
Height of the product (mm)	815	815	815	865
Width / Depth of the product (mm)	598 / 550	598 / 550	598 / 550	598 / 550
Net weight / Gross weight (kg)	47/49	44 / 46	40/42	35 / 39
Water softener <sup>5</sup>				
Maximum accepted water hardness (°DH)	50	50	50	50
Maximum temperature for water intake (°C)	60	60	60	60
Interior cavity	Stainless steel	Stainless steel	Stainless steel	Stainless steel/Polinox
Included accessories	Steam protection strip	Steam protection strip	Steam protection strip	Steam protection strip

Speed 60°C, Speed 45°C,

■ Yes, model has this feature. - Feature not available for this model.

- <sup>1</sup> On an energy-efficiency class scale from A to G.

  <sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco programme).

  <sup>3</sup> Water consumption in litres/operating cycle (using Eco programme).
- Duration of Eco programme.

  We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmo/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to ¾\* screwed joint.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

Built-in dishwashers | 60cm dishwashers 45cm slimline dishwasher | Built-in dishwashers

# 45cm slimline dishwasher

#### 60cm fully integrated dishwasher specifications

Appliance type		60cm fully integrated dishwashers	
Design family	iQ 300	iQ 100	iQ 100
Model number	SN73HX10VG	SN61HX03KG	SN61HX02TG
Control panel colour	Black / Stainless Steel	Black	Black
Height (cm) / Hinge type	81.5 / varioHinge	81.5 / Fixed	81.5 / Fixed
Design features			
Drying system	Heat exchanger	Heat exchanger	Heat exchanger
Home Connect Wi-Fi connectivity			
Control panel type	Push buttons + LED	Toggle control + LED	Toggle control + LED
Basket description	varioFlex	varioFlex	vario
varioDrawer (3rd loading level)	varioDrawer	-	_
Status indicator	infoLight (Blue)	infoLight (Blue)	infoLight (Blue)
Door openAssist	_	-	-
glassZone	_	-	_
Glass care technology			
Anti-slip protection / stemware support upper basket	-1-	-1-	-1-
Adjustable upper basket	rackMatic™ 3-stage	rackMatic™ 3-stage	Adjustable when empty
Number of flip tines in upper / lower basket	2/4	2/4	-12
Cup shelves upper / lower baskets	21-	21-	21-
Cutlery holder lower basket	_		
Largest loadable dish upper / lower basket (cm)	21 / 30	27 / 30	27 / 30
aquaSensor			
Real-time clock	-	-	-
Start delay time max hours	24	9	9
emotionLight (blue interior lighting)	_	_	-
End of cycle indicator	Acoustic	Acoustic	Acoustic
Salt / Rinse aid light indicator	■/■	■/■	■/■
Self cleaning filter system	•		
Flood protection system	AquaStop 24h	AquaStop 24h	AquaStop 24h
Safety features	Door lock	Door lock	Door lock
Programmes / Functions			
List of programmes	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 65°C, Speed 45°C, Favourite, Machine Care	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 65°C, Favourite, Machine Care	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 65°C, Favourite, Machine Care
Additional special options	Remote Start, intensiveZone, Half Load, varioSpeed Plus	Remote Start, intensiveZone, Half Load, varioSpeed Plus	Remote Start, intensiveZone, Half Load, varioSpeed Plus
Technical information			man Loud, ramospeca mas
Reference programme for measurements		3000 St. 100 St	rian zoda, ranospeca rias
F	Eco 50°C	Eco 50°C	Eco 50°C
Energy efficiency class¹	Eco 50°C		
Energy efficiency class <sup>1</sup> Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres)	F1301518710	Eco 50°C	Eco 50°C
Energy² / water³ (kWh / litres)	( D	Eco 50°C	Eco 50°C
	85 / 9	Eco 50°C	Eco 50°C
Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres) Load capacity (place settings)	85/9 14	Eco 50°C	Eco 50°C  84/9  13
Energy² / water³ (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min)	85 / 9 14 4:30	Eco 50°C	Eco 50°C  84/9  13  4:30
Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres) Load capacity (place settings) Programme duration <sup>4</sup> (h:min) Noise level (dB [A] re 1pW)	85/9 14 4:30 46	Eco 50°C  R D 84 / 9 13 4:30 42	Eco 50°C
Energy² / water³ (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class	85/9 14 4:30 46 C	Eco 50°C  (a D)  84 / 9  13  4:30  42  B	Eco 50°C  84 / 9  13  4:30  46  C
Energy² / water³ (kWh / litres) Load capacity (place settings) Programme duration⁴ (h:min) Noise level (dB [A] re 1pW) Noise efficiency class Noise level (silence programme) (dB [A] re 1pW)	85 / 9 14 4:30 46 C	Eco 50°C  84 / 9  13  4:30  42  B	Eco 50°C  84/9  13  4:30  46  C
Energy² / water³ (kWh / litres)  Load capacity (place settings)  Programme duration⁴ (h:min)  Noise level (dB [A] re 1pW)  Noise efficiency class  Noise level (silence programme) (dB [A] re 1pW)  Length of electrical supply cord (cm)	85/9 14 4:30 46 C	Eco 50°C  8419  13  4:30  42  8  -  175	Eco 50°C  84/9  13  4:30  46  C  -  175
Energy² / water³ (kWh / litres)  Load capacity (place settings)  Programme duration⁴ (h:min)  Noise level (dB [A] re 1pW)  Noise efficiency class  Noise level (silence programme) (dB [A] re 1pW)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)	85/9 14 4:30 46 C - 175 165/190	Eco 50°C  R D 84 / 9 13 4:30 42 B - 175 165 / 190	Eco 50°C  84 / 9  13  4:30  46  C  -  175  165 / 190
Energy² / water³ (kWh / litres)  Load capacity (place settings)  Programme duration⁴ (h:min)  Noise level (dB [A] re 1pW)  Noise efficiency class  Noise level (silence programme) (dB [A] re 1pW)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Maximum height for installation (mm)	85/9 14 4:30 46 C - 175 165/190 875	Eco 50°C  (a D )  84 / 9  13  4:30  42  B  -  175  165 / 190  875	Eco 50°C  84/9  13  4:30  46  C  -  175  165/190  875
Energy² / water³ (kWh / litres)  Load capacity (place settings)  Programme duration⁴ (h:min)  Noise level (dB [A] re 1pW)  Noise efficiency class  Noise level (silence programme) (dB [A] re 1pW)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Maximum height for installation (mm)  Maximum width for installation (mm)  Maximum width for installation (mm)	85 / 9 14 4:30 46 C - 175 165 / 190 875 60	Eco 50°C  84 / 9  13  4:30  42  B  - 175  165 / 190  875  60	Eco 50°C  84/9  13  4:30  46  C  -  175  165/190  875  60
Energy² / water³ (kWh / litres)  Load capacity (place settings)  Programme duration⁴ (h:min)  Noise level (dB [A] re 1pW)  Noise efficiency class  Noise level (silence programme) (dB [A] re 1pW)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Maximum height for installation (mm)  Maximum width for installation (mm)  Height of the product (mm)	85/9 14 4:30 46 C - 175 165/190 875 60 600	Eco 50°C  84 / 9  13  4:30  42  B  - 175  165 / 190  875  60  600	Eco 50°C  84/9  13  4:30  46  C  -  175  165/1190  875  60  600
Energy² / water³ (kWh / litres)  Load capacity (place settings)  Programme duration⁴ (h:min)  Noise level (dB [A] re 1pW)  Noise efficiency class  Noise level (silence programme) (dB [A] re 1pW)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Maximum height for installation (mm)  Maximum height adjustability feet (mm)  Maximum width for installation (mm)  Height of the product (mm)  Width / Depth of the product (mm)	85/9 14 4:30 46 C - 175 165/190 875 60 600 815 598/550	Eco 50°C  R B B 13 4:30 42 B - 175 165 / 190 875 60 600 815	Eco 50°C  84 / 9  13  4:30  46  C  -  175  165 / 190  875  60  600  815
Energy² / water³ (kWh / litres)  Load capacity (place settings)  Programme duration⁴ (h:min)  Noise level (dB [A] re 1pW)  Noise efficiency class  Noise level (silence programme) (dB [A] re 1pW)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Maximum height for installation (mm)  Maximum width for installation (mm)  Height of the product (mm)	85/9 14 4:30 46 C - 175 165/190 875 60 600 815	Eco 50°C  (a D )  84 / 9  13  4:30  42  B  - 175  165 / 190  875  60  600  815  598 / 550	Eco 50°C  84/9  13  4:30  46  C  -  175  165/190  875  60  600  815  598/550
Energy² / water³ (kWh / litres)  Load capacity (place settings)  Programme duration⁴ (h:min)  Noise level (dB [A] re 1pW)  Noise efficiency class  Noise level (silence programme) (dB [A] re 1pW)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Maximum height for installation (mm)  Maximum height adjustability feet (mm)  Maximum width for installation (mm)  Height of the product (mm)  Width / Depth of the product (mm)  Net weight / Gross weight (kg)	85 / 9 14 4:30 46 C - 175 165 / 190 875 60 600 815 598 / 550 35 / 39	Eco 50°C	Eco 50°C  84/9  13  4:30  46  C  -  175  165/190  875  60  600  815  598/550  30/33
Energy² / water³ (kWh / litres)  Load capacity (place settings)  Programme duration⁴ (h:min)  Noise level (dB [A] re 1 pW)  Noise efficiency class  Noise level (silence programme) (dB [A] re 1pW)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Maximum height for installation (mm)  Maximum width for installation (mm)  Height of the product (mm)  Width / Depth of the product (mm)  Net weight / Gross weight (kg)  Water softener⁵	85/9 14 4:30 46 C - 175 165/190 875 60 600 815 598/550 35/39	Eco 50°C  A D  84 / 9  13  4:30  42  B  -  175  165 / 190  875  60  600  815  598 / 550  31 / 34	Eco 50°C  84 / 9  13  4:30  46  C  175  165 / 190  875  60  600  815  598 / 550  30 / 33
Energy² / water³ (kWh / litres)  Load capacity (place settings)  Programme duration⁴ (h:min)  Noise level (dB [A] re 1pW)  Noise level (silence programme) (dB [A] re 1pW)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Maximum height for installation (mm)  Maximum width for installation (mm)  Height of the product (mm)  Width / Depth of the product (mm)  Net weight / Gross weight (kg)  Water softener⁵  Maximum accepted water hardness (°DH)	85/9 14 4:30 46 C - 175 165/190 875 60 600 815 598/550 35/39	Eco 50°C    A	Eco 50°C  84 / 9  13  4:30  46  C  .  175  165 / 190  875  60  600  815  598 / 550  30 / 33

#### Yes, model has this feature. Feature not available for this model.

#### iQ 300 SR93EX25MG

45cm slimline fully integrated dishwasher





#### Slimline

Slimline dishwashers are perfect for kitchens with limited space. Despite the reduced size, they still benefit from exciting features such as door openAssist and speed programmes.

Our 45cm dishwasher has a two tone design with features including varioHinge, Siemens Home Connect, Speed on demand (via the Siemens Home Appliances App) and the Favourite programme (can set programme and option choice as favourite via the Siemens Home Appliances App).

#### Speed on demand

The programme can be sped up at any time during the wash cycle, even if the programme has started, unlike varioSpeed+ (this would need to be selected before the start of the programme). Speed on demand can be activated using the Siemens Home Appliances App.



#### 45cm slimline fully integrated dishwasher specifications

Appliance type	45cm fully integrated dishwasher
Design family	iQ B00
Model number	SR93EX25MG
Control panel colour	Black / Stainless Steel
Height (cm) / Hinge type	81.5 / varioHinge
Design features	
Drying system	autoOpen dry / Heat exchanger
Home Connect Wi-Fi connectivity	
Control panel type	Push buttons + LED
Basket description	varioFlex
varioDrawer (3rd loading level)	varioDrawer
Status indicator	infoLight (Blue)
Door openAssist	
glassZone	
Glass care technology	•
Anti-slip protection / stemware support upper basket	<b>■</b> <i>I</i> –
Adjustable upper basket	rackMatic™ 3-stage
Number of flip tines in upper / lower basket	212
Cup shelves upper / lower baskets	
Cutlery holder lower basket	
Largest loadable dish upper <sup>6</sup> / lower basket (cm)	21 / 30
aquaSensor	
Real-time clock	
Start delay time max hours	24
emotionLight (blue interior lighting)	
End of cycle indicator	Acoustic
Salt / Rinse aid light indicator	■ / ■
Self cleaning filter system	
Flood protection system	AquaStop 24h
Safety features	Door lock
Programmes / Functions	
List of programmes	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 60°C, Speed 45°C, Favourite, Machine Care
Additional special options	Remote Start, intensiveZone, Hygiene Plus, varioSpeed Plus
Technical information	
Reference programme for measurements	Eco 50 ℃
Energy efficiency class <sup>1</sup>	₿ B
Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres)	51 / 8.7
Load capacity (place settings)	10
5 1 1 40 11	The state of the s

#### Included accessories

Noise level (silence programme) (dB [A] re 1pW)

Length of electrical supply cord (cm) Length inlet / outlet hose (cm)

Maximum height for installation (mm

Maximum width for installation (mm) Height of the product (mm)

Width / Depth of the product (mm Net weight / Gross weight (kg)
Water softener<sup>5</sup>

Maximum height adjustability feet (mm)

Maximum accepted water hardness (°DH)

Maximum temperature for water intake (°C)

Interior cavity

Noise level (dB [A] re 1pW) Noise efficiency class

<sup>&</sup>lt;sup>1</sup> On an energy-efficiency class scale from A to G.

<sup>&</sup>lt;sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco programme)
<sup>3</sup> Water consumption in litres/operating cycle (using Eco programme).

<sup>&</sup>lt;sup>4</sup> Duration of Eco programme.

<sup>&</sup>lt;sup>5</sup> We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmo/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice

Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to ¾" screwed joint

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required

<sup>&</sup>lt;sup>1</sup> On an energy-efficiency class scale from A to G.

<sup>&</sup>lt;sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco programme).

<sup>3</sup> Water consumption in litres/operating cycle (using Eco programme).

<sup>4</sup> Duration of Eco programme.

<sup>5</sup> We would recommend our dishwashers are connected to the mains water supply where possible. However they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmollitre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute.


Inlet valve connected directly to %\* screwed joint.


Largest loadable dish height in upper basket will be smaller when varioDrawer is installed.

Data valid in this table as of April 2025. Subject to modification without prior notice. \*5 year warranty - Offer dates: 01.04.25 - 31.03.26. T&C's apply. Online registration required


## Dishwasher technical diagrams


#### Fully integrated dishwashers SN97TX02CE, SN95YX02CG, SN95ZX61CG, SN95EX12CG and SN73HX10VG







#### Fully integrated dishwashers SN61HX03KG and SN61IX12TG







#### Fully integrated dishwasher SX73HX10VG





#### 45cm fully integrated dishwasher SR93EX25MG





#### Fully integrated dishwasher accessories

		SN97TX02CE	SN95YX02CG	SN952X61CG	SN95EX12CG	SX73HX10VG	SN73HX10VG	SN61HX03KG	SN61HX02TG	SR93EX25MG
Aqua stop extension	SZ72010			•			•	-		•
Silver polishing cassette	SZ73001									
Split door furniture front connection rails – For fullsize and slimline models	SZ38BI00	•	•	•	•		•		•	
Decor strip - For full size Polinox base models, 81.5cm height	SZ30BI02						•			
Decor strip - For full size and slimline Stainless Steel base models, 81.5cm height	SZ30BI01	•	•	•	•					
Decor strip - For full size Stainless Steel base models, 86.5cm height	SZ30BI11									
Decor strip - For full size Stainless Steel base models installed off the ground, 81.5cm height	SZ73035	•	•	•	•					
Decor strip - For full size Stainless Steel base models installed off the ground, 86.5cm height	SZ73045									
Door attachment – brushed steel	SZ73056									
Drop hinge for tall cabinets	SZ73010							•		
Adjustable cutlery basket - full size dishwashers	SZ73100	•	•	•			•			
Wine glass holder accessory (Glass secure tray)	SZ73300	•	•	•	•	•	•	•	•	•
Rack insert for stemware dishwasher	SZ73640	•	•	•	•	•	•	-	•	

# Cutting-edge innovations for extra shine

Siemens freestanding dishwashers take full advantage of the latest technologies.

Designed to fit in around busy lifestyles, our standard 60cm freestanding dishwashers feature efficient, time saving and environmentally conscious programmes, sure to make dishes shine. With a sleek and stylish design, both inside and out, Siemens dishwashers are designed to complement the home.



Experience the perfect blend of efficiency and performance.

All Siemens freestanding dishwashers are A-rated. They are designed to prioritise energy efficiency and water conservation, all the while delivering outstanding performance. Siemens dishwashers offer a more sustainable approach to dishwashing, with a range of innovative features and intelligent technology, including intelligent sensors that optimise water and energy usage according to load size and dirtiness level.



#### Siemens freestanding dishwasher warranties:



A five year warranty is available on all freestanding dishwasher models listed in this brochure to protect against manufacturing and material faults during this warranty period.

\*Offer dates: 01.04.25 – 31.03.26. Online registration required. For full T&Cs and qualifying appliances visit **siemens-home**. bsh-group.com/uk/customer-service/siemens-warranties



#### 10 Year Anti-Rust Warranty

All Siemens dishwashers purchased from the 1st January 2012 onwards have a 10 Year Anti-Rust Warranty to protect against rust in the inner cavity of the appliance.



#### Lifetime AquaStop Warranty

All Siemens freestanding dishwashers listed in this brochure have a lifetime AquaStop warranty to protect against water damage caused by a defective AquaStop system.

To find out more about warranty and for registration, please visit: UK: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: siemens-home.bsh-group.com/ie/customer-service/warranty



#### Freestanding dishwashers.

Our freestanding dishwashers are available in a range of stylish and durable finishes, perfect for adding a touch of elegance to any kitchen. From the stainless steel finish, resistant to fingerprints and smudges, to the sleek and modern striking black steel.



Model shown: SN25EC13CE (black steel)



Model shown: SN25EI13CE (stainless steel)



Model shown: SN27TI02CE (stainless steel anti-fingerprint)



Model shown: SN25EW13CE (white)

#### Welcome to a new era of dishwashing with brilliantShine.



Our new 60cm dishwashers feature the brilliantShine programme – a one touch solution that combines the Glass 40°C programme and the Shine & Dry option to ensure glassware is always left

Straight from dishwasher to table, Shine & Dry provides streak-free, shining glasses. Harnessing the power of Zeolith® at its best, the special drying cycle also works just as well on plastics, pots and pans, saving time as there is no longer a need to give them an extra towel dry. The brilliantShine programme with Zeolith® Drying produces sparkling glasses to be proud of, keeping glassware ready to shine for any guests, even unexpected ones.

There are three factors in dishwashing that influence the shine of glassware: temperature, cycle time, and the use of detergent. The new brilliantShine programme offers three intelligent solutions that take care of these factors:


- Zeolith® drying uses a Zeolite mineral that absorbs moisture and converts it into a gentle heat.
- The Shine & Dry option swills all residues of detergent with extra rinsing water, resulting in streak-free, shining glassware.
- The Glass 40°C programme ensures that glassware is not exposed to excessive temperatures or spray pressures, and keeps the cycle time shorter.

#### Zeolith®: Super efficient drying technology.



Using advanced drying technologies, Siemens dishwashers keep energy consumption to a minimum. Zeolith®, a form of zeolite mineral, has the astonishing ability to absorb moisture and convert it to heat. The heat produced naturally by the Zeolith® is used for the drying cycle. No additional energy is therefore required to heat up the contents of the dishwasher for the drying process (as with a standard drying system). This leads to excellent drying results, with less energy usage than models without Zeolith® technology.

Zeolith® is stored in the depths of the dishwasher. It regenerates itself and keeps working for the lifetime of the machine, so it never needs replacing. Combine this with the economy 50°C programme to get brilliant results with minimal energy.



Cleaning phase As the mineral is heated during the cleaning cycle, it is recharged and ready to absorb moisture once more



#### The new priority zone for gentle and thorough washing of the most valuable glasses.



#### glassZone

moisture and

energy.

With glassZone, even the most valuable of glasses can go in the dishwasher with peace of mind. The six integrated nozzles ensure continuous but gentle water supply to enable thorough cleaning without damaging sensitive materials. In addition, integrated soft anti-slip elements give a secure hold to protect against mechanical stress and prevent damage to glass rims.





#### The Siemens Home Appliances App helps take minds off the household chores.

By connecting the dishwasher to the Siemens Home Appliances App, programmes and options can be easily selected to start the dishwasher from wherever and whenever. Using the app, dishes can be ready exactly when needed – which is perfect for busy lifestyles. When the cycle has finished, the Siemens Home Appliances App will send a push notification to say so.

There are a number of great features which can be selected through the Siemens Home Appliances App, such as Speed on Demand, Silence on Demand and autoOpen Dry. It is also possible to set a Favourite programme and alter the wash cycle options from anywhere.



#### **Programme Assistant**

Programme Assistant on the Siemens Home Appliances App helps with finding the correct programme for the dishes quickly and easily. By answering a few simple questions, the app will suggest the optimum programme for the load. It is easy to adjust the dishwasher settings via the app on a smartphone or tablet to keep it running at maximum efficiency.

#### **Siemens Home Connect partner services**

It is also possible to use our partner services, such as Amazon Alexa, Google Home and IFTTT to manage the dishwasher. With Amazon Alexa, the appliance can be controlled via voice – just ask Alexa.

To keep on top of dishwasher tablet stock, tablets can be automatically reordered by Smart Finish. The feature is easy to set up and saves having to worry about running out of tablets again.

Setting the water hardness settings has never been easier, too. Whether the area experiences hard or soft water, it can be easily set within the app.

#### **Programme Download**

Paired with the Siemens Home Appliances App, Siemens' dishwashers can always be kept up to date with software updates. They can even be personalised by downloading free additional programmes available via the Siemens Home Appliances App. Whether it is more intense programmes, intelligent programmes or even faster programmes, there are additional programmes – up to 10 depending on the model – available to suit everyone's need. Once downloaded they can also be added to favourites for even quicker access.

Learn more about Siemens Home Connect by visiting our website.

UK: siemens-home.bsh-group.com/uk/inspiration/innovation/connected

IE: siemens-home.bsh-group.com/ie/inspiration/innovation/connected

#### Basket systems for added flexibility and better results.



#### varioDrawer

By adding a third shelf for cutlery, varioDrawer removes the need for a cutlery basket and creates more space.



#### varioFlex basket system

The varioFlex basket has 2 flexible areas in the top rack and 4 in the bottom, providing extra flexibility within the dishwasher to create more space for those larger items.



#### flexComfort basket system

These baskets have the ability to fold down certain compartments within the cavity for extra room. The top rack has 2 areas that can be adjusted for extra flexibility. The bottom basket has 8 areas that can be adjusted to create more space so the inside of the dishwasher is constantly adaptable. Anti-slip elements and stemware support hold have also been added, meaning it has never been as easy to load the dishwasher.



#### flexComfort Pro basket system

The flexComfort Pro basket system is designed to hold larger plates and allows easy creation of space for pots and pans. Choose from up to 6 flexible areas in the top rack and up to 8 flexible areas in the bottom basket to create extra space. Blue touchpoints inside the baskets indicate all the adjustment options available at a glance, and the easyGlide wheels on the upper basket make loading the dishwasher even easier. Other new features such as anti-slip elements and stemware support hold means it is easy to securely load glassware.



#### rackMatic™ 3-stage

Available across all storage solutions, this feature conveniently allows the user to raise and lower the height of the top basket to create more or less space, even when the dishwasher is loaded.











#### Let the dishwasher do the work, with the automatic programme sensor.



Auto 45°-65°

Doing the dishes is now easier than ever before with sensor technology included in every one of our dishwashing appliances. From soiled pots and pans to delicate plates – every item gets the right care and treatment

For example, the autoProgramme sensor gives brilliant results at the push of a button. As soon as the autoProgramme is activated, the aqua sensor automatically measures the cloudiness of the water to precisely adapt the amount and temperature of water needed for optimal cleaning. The sensor controls the entire washing and drying process and automatically adjusts water consumption, water temperature and cycle time to suit each load. The sensor control unit steers the whole washing and drying process to deliver brilliant results every time. Model shown left:

**SN27TI02CE** 60cm freestanding dishwasher



# Enhanced performance and sparkling results

Standard features on all freestanding models.



#### intensiveZone

Delicate items and pots and pans can be cleaned together in the same wash. The intensiveZone option increases the spray pressure and temperature in the bottom basket to handle burnt on pans, whilst delicate items can be washed safely in the top basket.



#### varioSpeed Plus

Use the varioSpeed Plus button to run the dishwasher significantly faster without compromising on wash quality.



#### Speed on Demand

An advanced functionality of varioSpeed Plus that cleans and dries the dishes in the shortest possible time for individual needs. This option can be activated, even when a programme is already running, within the Siemens Home Appliances app.



Quickly and evenly dissolves dishwasher tablets throughout the entire machine, leaving no mess to clean at the end of the cycle.



#### Favourite

The Favourite button makes the dishwasher even more personal. By entering the most used combination of dishwashing programmes and options, they can be conveniently started at the touch of a button, via the Siemens Home Appliances App or via the Alexa voice assistant.



Makes sure that the optimum temperature is used depending on how dirty the dishes are, meaning that dishes are perfectly clean the first time round.



#### Heat exchanger

Protect glasses from cracking with gentle water heating. Heat generated during the wash cycle is used to pre-heat the rinsing water to stop glasses being put under stress.



The extraDry option can be added to any programme and will extend the drying cycle. This can be useful for harder to dry loads.



By monitoring that the optimum amount of water is flowing through the dishwasher throughout the cycle, the loadSensor helps to ensure that dishes are cleaned thoroughly.

#### Highlight features, available on selected freestanding models.



#### TFT display with real-time clock

The clear, touch control high resolution TFT display makes it easy to select programmes and settings and check the status of the dishwasher at a glance. Thanks to the real-time clock, it is now possible to set the exact time the dishes will be ready by, for extra convenience. Perfect for delivering warm plates to the dinner table.



#### autoOpen dry

Gentle drying thanks to autoOpen dry. During the drying process, the door opens automatically and gently. This allows the natural drying of the dishes without the need for additional energy.



#### Silence on Demand feature in the Siemens Home Appliances App

With advanced noise reduction technologies and soundproofing materials, Siemens dishwashers operate at whisper-quiet levels reducing the dishwasher noise level by 1dB – to minimise noise disruption in the home. For a particularly guiet cycle, the Silence programme, further reduces the dishwasher noise level by 2-3dB. This is achieved by decreasing water pressure and extending the run time. If silence is needed unexpectedly, the Silence on demand features in the Siemens Home Appliances App, lets you pause the dishwasher for up to 30 minutes during any washing cycle.



#### Silence programme

When the Silence programme is selected the dishwashers noise level is reduced by 2-3dB. This is achieved by decreasing water pressure and extending run time.



#### Silence on Demand

With the Siemens Home Appliances App, it is possible to pause the dishwasher for up to 30 minutes by selecting Silence on Demand via the Siemens Home Appliances App if silence is needed during the washing cycle.



The Hygiene Plus setting is ideal for chopping boards and food containers. It heats up to extra high temperature in the final rinse for maximum hygiene (not on delicate programme).




#### emotionLight

The emotionLight uses LED lights to create a cool blue glow emanating from inside your dishwasher.



# Dishwasher product overview

#### Freestanding 60cm dishwasher range

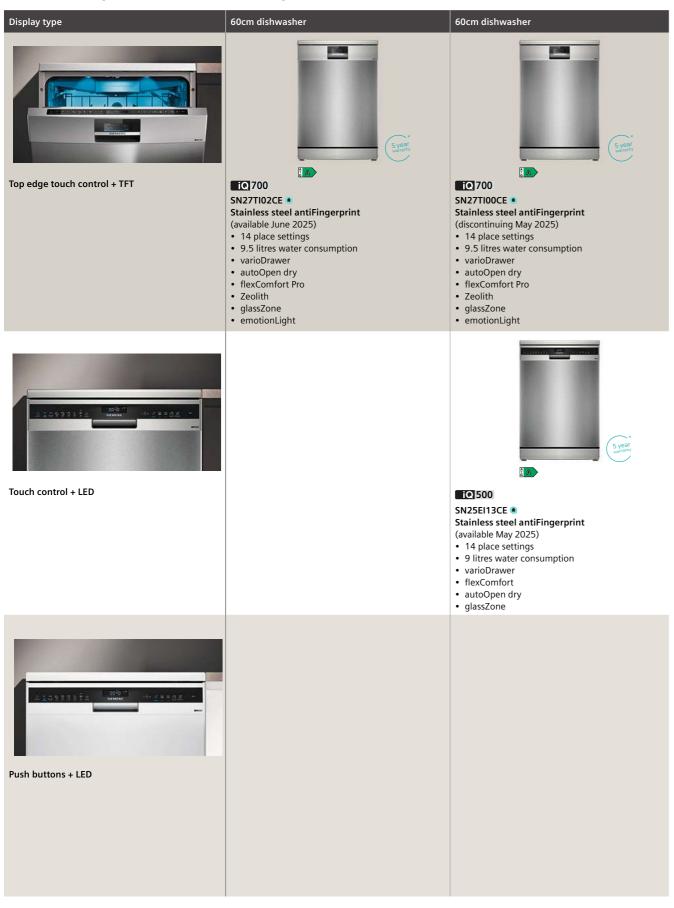



Home Connect		
60cm dishwasher	60cm dishwasher	60cm dishwasher
	Committee Commit	
_		
_		
\$ Syear werently	5 year wortenity	
iQ500	iQ 500	
SN25EC13CE  Black steel antiFingerprint	SN25EW13CE  White	
(available May 2025) • 14 place settings	(available May 2025)  • 14 place settings	
<ul><li>9 litres water consumption</li><li>varioDrawer</li></ul>	9 litres water consumption     varioDrawer	
autoOpen dry     flexComfort	autoOpen dry     flexComfort	
• glassZone	• glassZone	

## 60cm dishwashers

#### iQ 700 SN27TI02CE

60cm freestanding dishwasher Stainless steel antiFingerprint

600mm



















60cm freestanding dishwasher specifications

specifications	Available June 2025
Appliance type	60cm freestanding dishwasher
Design family	iQ700
Model number	5N27TI02CE
Colour	Stainless steel
Design features	
Drying system	Zeolith / autoOpen dry
Home Connect Wi-Fi connectivity	
Control panel type	Top edge touch control + TFT
Basket description	flexComfort Pro
varioDrawer (3rd loading level)	
glassZone	
Glass care technology	
Anti-slip protection / stemware support upper basket	■/■
Adjustable upper basket	rackMatic™ 3-stage
Number of flip tines in upper / lower basket	6/8
Cup shelves upper / lower baskets	212
Cutlery holder lower basket	-
Largest loadable dish upper / lower basket (cm)	21 / 30
aquaSensor	
Real-time clock	
Start delay time max hours	24
Time remaining indicator	
Emotion light (interior lighting)	
End of cycle indicator	Acoustic
Salt / Rinse aid light indicator	■1■
Self cleaning filter system	-
Flood protection system	AquaStop 24h
Safety features	Door lock
Programmes / Functions	
List of programmes	Intelligent 40°C, Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 60°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care
Additional special options	Remote Start, Shine & Dry, intensiveZone, Hygiene Plus, varioSpeed Plus
Technical information	
Reference programme for measurements	Eco 50°C
Energy efficiency class¹	<sup>2</sup> A
Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres)	54/9.5
Load capacity (place settings)	14
Programme duration <sup>4</sup> (h:min)	4:55
Noise level (dB [A] re 1pW)	44
Noise efficiency class	В.
Noise level (silence programme) (dB [A] re 1pW)	
	42
Maximum height adjustability feet (mm)	2
Maximum height adjustability feet (mm)  Depth with open door 90 degree (cm)	2 115.5
Maximum height adjustability feet (mm)  Depth with open door 90 degree (cm)  Length of electrical supply cord (cm)	2 115.5 175
Maximum height adjustability feet (mm)  Depth with open door 90 degree (cm)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)	2 115.5 175 165 / 190
Maximum height adjustability feet (mm)  Depth with open door 90 degree (cm)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Height of the product with removable top (cm)	2 115.5 175 165 / 190 84.5
Maximum height adjustability feet (mm)  Depth with open door 90 degree (cm)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Height of the product with removable top (cm)  Height of the product without removable top (cm)	2 115.5 175 165 / 190 84.5 81.5
Maximum height adjustability feet (mm)  Depth with open door 90 degree (cm)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Height of the product with removable top (cm)  Height of the product without removable top (cm)  Width / Depth of the product (cm)	2 115.5 175 165/190 84.5 81.5 60/60
Maximum height adjustability feet (mm)  Depth with open door 90 degree (cm)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Height of the product without removable top (cm)  Height of the product without removable top (cm)  Width / Depth of the product (cm)  Net weight / Gross weight (kg)	2 115.5 175 165/190 84.5 81.5 60/60 50/56
Maximum height adjustability feet (mm)  Depth with open door 90 degree (cm)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Height of the product with removable top (cm)  Height of the product without removable top (cm)  Width / Depth of the product (cm)  Net weight / Gross weight (kg)  Water softener <sup>a</sup>	2 115.5 175 165/190 84.5 81.5 60/60 50/56
Maximum height adjustability feet (mm)  Depth with open door 90 degree (cm)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Height of the product with removable top (cm)  Height of the product without removable top (cm)  Width / Depth of the product (cm)  Net weight / Gross weight (kg)  Water softener <sup>a</sup> Maximum accepted water hardness ("DH)	2 115.5 175 165/190 84.5 81.5 60/60 50/56
Maximum height adjustability feet (mm)  Depth with open door 90 degree (cm)  Length of electrical supply cord (cm)  Length inlet / outlet hose (cm)  Height of the product with removable top (cm)  Height of the product without removable top (cm)  Width / Depth of the product (cm)  Net weight / Gross weight (kg)  Water softener <sup>a</sup>	2 115.5 175 165 / 190 84.5 81.5 60 / 60 50 / 56

- <sup>1</sup> On an energy-efficiency class scale from A to G.
- <sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco programme).

  <sup>3</sup> Water consumption in litres/operating cycle (using Eco programme).
- <sup>3</sup> Water consumption in litres/operating cycle (using Eco programme).
  <sup>4</sup> Duration of Eco programme.
  <sup>5</sup> We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to an external water softener as long as the water softener produces softened water of less than 1.1 mmolliter (2.70°) and the water softener in the appliance is turned off. Please contact product advice for further information. Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to % screwed joint.
- Data valid in this table as of April 2025. Subject to modification without prior notice.

  \*5 year warranty Offer dates: 01.04.25 31.03.26. T&C's apply. Online registration required.









60cm 1	freestanding	dis	hwas	her
specifi	cations			

Appliance type 60cm freestanding dishwashers				
Design family	iQ 700	iQ 500	iQ 500	iQ 500
Model number	SN27TIOOCE	SN25EI13CE	SN25EC13CE	SN25EW13CE
Colour	Stainless steel	Stainless steel	Black steel	White
Design features				
Drying system	Zeolith / autoOpen dry	autoOpen dry / Heat exchanger	autoOpen dry / Heat exchanger	autoOpen dry / Heat exchanger
Home Connect Wi-Fi connectivity		•		
Control panel type	Top edge touch control + TFT	Touch control + LED	Push buttons + LED	Push buttons + LED
Basket description	flexComfort Pro	flexComfort	flexComfort	flexComfort
varioDrawer (3rd loading level)		•		
glassZone				
Glass care technology		•		
Anti-slip protection / stemware support upper basket	■/■	■/■	■/■	■/■
Adjustable upper basket	rackMatic™ 3-stage	rackMatic™ 3-stage	rackMatic™ 3-stage	rackMatic™ 3-stage
Number of flip tines in upper / lower basket	6/8	2/8	2/8	2/8
Cup shelves upper / lower baskets	2/2	2/2	2/2	2/2
Cutlery holder lower basket	_	_	_	_
Largest loadable dish upper / lower basket (cm)	21 / 30	21 / 30	21 / 30	21 / 30
aquaSensor				
Real-time clock		-	_	-
Start delay time max hours	24	24	24	24
Time remaining indicator		•		
Emotion light (interior lighting)		-	-	-
End of cycle indicator	Acoustic	-	-	-
Salt / Rinse aid light indicator	■/■	■/■	■/■	■/■
Self cleaning filter system	•			
Flood protection system	AquaStop 24h	AquaStop 24h	AquaStop 24h	AquaStop 24h
Safety features	Door lock	Control panel lock, door lock	Control panel lock, door lock	Control panel lock, door lock

Programmes / Functions				
List of programmes	Intelligent 40°C, Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 60°C, Speed 45°C, brilliantShine 40°C, Silence 50°C, Favourite, Machine Care	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 60°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care	Eco 50°C, Auto 45-65°C, Intensive 70°C, Speed 60°C, Speed 45°C, Glass 40°C, Silence 50°C, Favourite, Machine Care	Eco 50°C, Auto 45-65°C, Intensive 70° Speed 60°C, Speed 45°C, Glass 40°C Silence 50°C, Favourite, Machine Car
Additional special options	Remote Start, Shine & Dry, intensiveZone, Hygiene Plus, varioSpeed Plus	Remote Start, intensiveZone, Half Load, varioSpeed Plus	Remote Start, intensiveZone, Half Load, varioSpeed Plus	Remote Start, intensiveZone, Half Load, varioSpeed Plus
Technical information				
Reference programme for measurements	Eco 50°C	Eco 50°C	Eco 50°C	Eco 50°C
Energy efficiency class <sup>1</sup>	A A	â A	â A	â A
Energy <sup>2</sup> / water <sup>3</sup> (kWh / litres)	54 / 9.5	54/9	54/9	54/9
Load capacity (place settings)	14	14	14	14
Programme duration <sup>4</sup> (h:min)	4:55	4:30	4:30	4:30
Noise level (dB [A] re 1pW)	44	42	42	42
Noise efficiency class	В	В	В	В
Noise level (silence programme) (dB [A] re 1pW)	42	41	41	41
Maximum height adjustability feet (mm)	2	2	2	2
Depth with open door 90 degree (cm)	115.5	115.5	115.5	115.5
Length of electrical supply cord (cm)	175	175	175	175
Length inlet / outlet hose (cm)	165 / 190	165 / 190	165 / 190	165 / 190
Height of the product with removable top (cm)	84.5	84.5	84.5	84.5
Height of the product without removable top (cm)	81.5	81.5	81.5	81.5
Width / Depth of the product (cm)	60 / 60	60 / 60	60 / 60	60 / 60
Net weight / Gross weight (kg)	54/56	52 / 53	52 / 53	52 / 53
Water softener <sup>s</sup>	<b>I</b>	<b>■</b> 3		
Maximum accepted water hardness (°DH)	50	50	50	50
Maximum temperature for water intake (°C)	60	60	60	60
Interior cavity	Stainless steel	Stainless steel	Stainless steel	Stainless steel

- <sup>2</sup> Energy consumption in kWh1100 operating cycles (using Eco programme).

  <sup>3</sup> Water consumption in litres/operating cycle (using Eco programme).

  <sup>4</sup> Ouration of Eco programme.

  <sup>5</sup> We would recommend our dishwashers are connected to the mains water supply where possible. However, they may also be connected to
- an external water softener as long as the water softener produces softened water of less than 1.1 mmo/litre (7.0°e) and the water softener in the appliance is turned off. Please contact product advice for further information.
- Water pressure required: 0.5-10 Bar. Flow rate: 10 litres per minute. Inlet valve connected directly to ¾" screwed joint.
- Data valid in this table as of April 2025. Subject to modification without prior notice.

  \*5 year warranty Offer dates: 01.04.25 31.03.26. T&C's apply. Online registration required.

# Laundry care, high performance with state-of-the-art technology

Siemens' built-in laundry range is intelligently designed and quietly efficient to make laundry easier and less of a chore.

Our machines are the perfect blend of cutting-edge technology and innovative design. Siemens built-in washing machines and washer dryers seamlessly integrate into any space – and with a focus on efficiency and convenience, they quietly deliver beautifully clean clothes.



#### Siemens home laundry warranties:



#### 5 year warranty

A five year warranty is available on the built-in washing machine listed in this brochure to protect against manufacturing and material faults during this warranty period.

\*Offer dates: 01.04.25 – 31.03.26. Online registration required. For full T&Cs and qualifying appliances visit siemens-home.bsh-group.com/uk/customer-service/ siemens-warranties



#### 2 vear warranty

A two year warranty is available on all Siemens built-in washer dryers listed in this brochure to protect against manufacturing and material faults during this warranty period.



#### AquaStop Lifetime Warranty

Selected Siemens laundry appliances have a lifetime AquaStop warranty to protect against water damage caused by a defective AquaStop system. For models with this warranty please check the matrix.



#### iQdrive® Motor 10 Year Warranty

The iQdrive® Motor Warranty is available on selected laundry machines to protect against any defects to the iQdrive® motor. For models with this warranty please check the laundry matrix.

To find out more about warranty and for registration, please visit: UK: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: siemens-home.bsh-group.com/ie/customer-service/warranty



Our laundry appliances are designed to make laundry easier and less of a chore. They can be neatly concealed behind the door, maintaining clean lines and modern aesthetics. With a range of key features, doing laundry has never been more convenient.



#### reload

The reload function is the perfect solution when an extra item needs to be added to the load. Once the icon is displayed, the washing machine can be paused and extra items can easily be added in.



#### Foam detection

Detects if too much foam has been created in the wash, if so, it will adjust the drum movement and add an extra rinse cycle if necessary.



#### rapid1

Washes, rinses and spins lightly soiled clothing in just 15 minutes. Designed for those with busy lifestyles.

#### Extremely quiet washing machines

Thanks to the brushless iQdrive motor and antiVibration side panels, Siemens built-in washing machines are particularly quiet in their class.

#### Extremely quiet washer dryers

Our washer dryers are designed to be as quiet as possible while still offering excellent performance and results when washing and drying.



#### Wool programme

An exceptionally gentle woollen hand wash programme. The drum is set to provide a cradle motion, with only an occasional rotation, giving a soft wash action. A special spin phase finishes the cycle.



#### Shirts/Blouses

The ideal programme for a week's worth of shirts, offering a reduced spin to reduce ironing. Suitable for up to 2kg worth of washing, this cycle is designed to run for just over an hour.



#### Mixed fabrics

Perfect for the mid-week wash of a mixture of cottons, and hard-wearing or easy-care fabrics. Load up to 4kg worth of garments with a running time of just 49 minutes.



#### Delicates/silk

This gentle programme is perfect for those delicate, washable fabrics, e.g. silk, satin, synthetics or blended fabrics (e.g. curtains). Cool temperatures, gentle spinning between the rinse cycles, and reduced final spin speeds reduce creases dramatically.



Model shown above: WI14W502GB

Model shown: WI14W502GB

# The complete laundry solution with features that fit around any lifestyle

Features specific to integrated washing machines.

Check model for available functions.



#### Capacity

The large 8kg drum capacity is the perfect size to hold more laundry and reduce the number of loads to wash.



#### **Drum Clean**

An automatic alert after 20 washes to run the Drum Clean programme on a 90°C or 60°C wash keeps the appliance clean and odour free.



#### varioSpeed

This feature can automatically detect when time can be saved. The smart sensor identifies load volume and textile kind, to adapt the washing machine's programme time efficiently to suit the specific load, delivering perfectly clean laundry in up to 65% less time.\*



#### timeLight

Stay in control. The timeLight projects the remaining cycle time and programme status onto any floor surface to keep the consumer informed at a glance, and is visible without opening the cabinet door.



244

#### Easy Installation - Cardan Drive

Our built-in washing machine with Cardan Drive is designed to make the installation very convenient. It enables the washing machine to match to the height of furniture by adjusting the height of the rear feet of the washing machine at any niche height up to 60mm. Just place the appliance into the niche and adapt the back feet easily with a screwdriver from the front.





#### iQdrive® Motor 10 Year Warranty

The iQdrive® Motor Warranty is available on selected laundry machines to protect against any defects to the iQdrive® motor. For models with this warranty please check the laundry matrix.





#### Features specific to integrated washer dryers.

Check model for available functions.



#### **Washing Capacity**

The large 7kg washing capacity ensures clothes can be washed with fewer loads.



#### **Drying Capacity**

The 4kg drying capacity ensures clothes can be dried effectively.



#### Washing + Drying

The continuous washing and drying cycle is suitable for loads up to 4kg. This cycle will first wash clothes on the chosen setting and once finished, will automatically switch to drying the clothes for ease and speed.



#### auta Din

Gently dries laundry to the exact degree of dryness desired.



#### \ctiveWater™

Helps to reduce water consumption thanks to a 2-step automatic load adjustment system.



#### Fluff removal programme

A ten minute fluff removal cycle on washer dryers that removes fluff deposits in the machine. A light indicates when this is needed.



#### Outdo

Specialised programme for washing waterproof clothing with membrane technology to protect the fabric and seams. For use with outdoor fabric detergent.

# Washing machines

#### **1Q** 700 WI14W502GB

Built-in washing machine White 1400rpm spin speed





















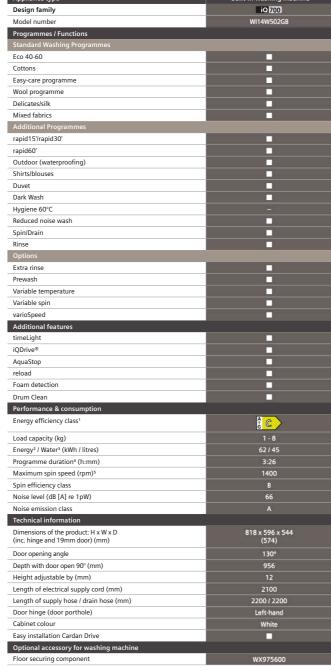

<sup>■</sup> Yes, model has this feature. - Feature not available for this model


# Washer dryers

#### iQ 500 WK14D543GB

Built-in washer dryer White 1400rpm spin speed











specifications		
Appliance type	Built-in wa	sher dryers
Design family	iQ 500	iQ 300
Model number	WK14D543GB	WK14D322GB
Programmes / Functions		
Standard Washing Programmes		
Eco 40-60		■
Cottons		
Easy-care programme		
Wool programme		•
Delicates/silk		•
Rinse/Spin		•
Drain/Spin		
Additional Programmes		
Hygiene		-
rapid15'		-
Night wash		-
Shirts/blouses		-
Outdoor		-
Mixed fabrics		_
Drying programmes		
Gentle dry		•
Intensive dry		
Fluff removal programme	T T	
Options		_
flexiTime		•
Easy iron		
Intensive	<u> </u>	
Water Plus		<u> </u>
Rinse hold		
Prewash		
Variable spin / Variable temperature		<u>-</u> ■/-
Additional features	indian.	
autoDry		_
AquaStop		_
Foam detection	-	•
autoLoad		
Time delay	24h	24h
Performance & consumption		
Energy efficiency class washing and drying <sup>1</sup>	A	A
Energy emelency class washing and drying	₫ E	A E
Energy efficiency class washing <sup>2</sup>	ÊE	Ê
Energy <sup>3</sup> / Water <sup>4</sup> washing and drying (kWh / litres)	266 / 68	266 / 68
Energys / Water washing (kWh / litres)	77   44	77 / 44
Load capacity washing and drying / washing (kg)	417	4/7
Programme duration <sup>7</sup> washing and drying / washing (h:mm)	5:30 / 2:50	5:30 / 2:50
Spin efficiency class	B	B B
Spin speed® (rpm)	1400	1400
Noise level (dB [A] re 1pW)	72	72
Noise emission class	Α Α	, , , , , , , , , , , , , , , , , , ,
Technical information	Α	A
Dimensions of the product: H x W x D	820 x 595 x 560	820 x 595 x 560
(inc. hinge and 19mm door) (mm)	(584)	(584)
Door opening angle	95°	95°
Depth with door open 90° (mm)	960	960
Height adjustable by (mm)	15	15
		220
	220	
Length of electrical supply cord (mm)	220	
	220 2000 / 2000 Left-hand	2000 / 2000 Left-hand

<sup>■</sup> Yes, model has this feature. - Feature not available for this model.

Data valid in this table as of April 2025. Subject to modification without prior notice.

<sup>&</sup>lt;sup>1</sup> On an energy-efficiency class scale from A to G. <sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco 40-60 programme). <sup>3</sup> Water consumption in litres/operating cycle (using Eco 40-60 programme). <sup>4</sup> Duration of Eco 40-60 programme. <sup>5</sup> The specified value is rounded.


Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

<sup>1,2</sup> On an energy-efficiency class scale from A to G. <sup>3</sup> Energy consumption in kWh/100 complete operating cycles (using Eco 40-60 programme). Water consumption in litres/complete operating cycle (using Eco 40-60 programme). \* Energy consumption in kWh/100 wash cycles (using Eco 40-60 programme). \* Brergy consumption in kWh/100 wash cycles (using Eco 40-60 programme). \* Water consumption in litres/wash cycle (using Eco 40-60 programme) \* Duration of Eco 40-60 programme, complete operating cycle / wash cycle. \* The specified value is rounded.


# Laundry appliance technical diagrams

#### Integrated washing machine WI14W502GB

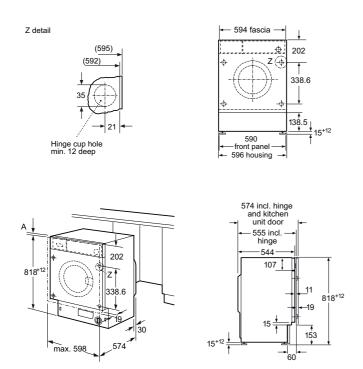

#### Integrated washer dryers WK14D543GB and WK14D322GB

min. 500 max. 900

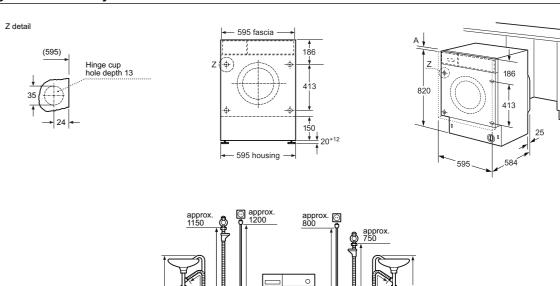

# Welcome to a freestanding range with a host of intelligent laundry solutions

Siemens' freestanding washing machines, washer dryers and tumble dryers deliver outstanding results every time.

Sleek, streamlined, and stylish, Siemens freestanding laundry appliances not only look great in the home, they perform perfectly too. With state-of-the-art technology Siemens freestanding washing machines are extremely energy efficient, easy to use, and most importantly designed to save time and resources.

All Siemens freestanding tumble dryers feature sensor drying, which provides uniform drying results, and makes over-drying a thing of the past, meaning laundry is easier and less of a chore.

Siemens freestanding washer dryers combine the innovative functions of modern washing machines and dryers in one appliance to save effort, time and space. Conveniently control both washing and drying cycles, at the touch of a button, with the large display and clear operation on these intelligent appliances.



#### Siemens home laundry warranties:



#### 5 year warranty

A five year warranty is available on all freestanding washing machine, washer dryer and tumble dryer models listed in this brochure to protect against manufacturing and material faults during this warranty period.

\*Offer dates: 01.04.25 – 31.03.26. Online registration required. For full T&Cs and qualifying appliances visit **siemens-home**. **bsh-group.com/uk/customer-service/siemens-warranties** 



#### **Lifetime AquaStop Warranty**

Selected Siemens laundry appliances have a lifetime AquaStop warranty to protect against water damage caused by a defective AquaStop system. For models with this warranty please check the matrix



#### iQdrive® 10 Year Warranty

The iQdrive® Motor Warranty is available on all washing machines to protect against any defects to the iQdrive® motor.

To find out more about warranty and for registration, please visit: UK: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: siemens-home.bsh-group.com/ie/customer-service/warranty

251



# Rethink laundry care with the Siemens Intelligent Utility Room

When space is no issue, a dedicated utility room can offer more convenience, efficiency, and organisation.

All the laundry essentials – detergents, fabric softeners, ironing board – can be found in one organised, easy-to-access place. A laundry room offers ample storage, helping to keep the home clutter-free and laundry essentials at one's fingertips.

Above all, a laundry room is a time-saver. With everything needed in one place to wash, dry, fold, and iron in record time.

Our advanced laundry technology further delivers control, convenience and flexibility to the process with appliances designed to not only clean clothes but also to automate as much of the process as possible to free time for more important tasks.





Siemens laundry appliances are designed to be intelligent and efficient, knowing exactly when to start a wash cycle to maximise energy efficiency, and when to adjust water levels based on the load size to preserve resources. They dispense the optimal dosage of detergent, ensuring excellent results. With the Siemens Home Appliances App, stay informed and educated on the best programmes to save resources or time, and easily access the most frequently used programmes. A laundry room that truly adapts to individual needs.

Even with limited space for laundry appliances, these washing machines, tumble dryers and washer dryers still seamlessly fit into an everyday kitchen. Our appliances are equipped with great features, offering convenience and efficiency as the standard.

# Laundry key features







1600 RPM


#### Higher spin speed for faster drying

With a high and powerful spin speed of 1600 RPM (revolutions per minute), our Siemens washing machines will extract more water from the clothes. The higher the spin speed, the drier the clothes will be at the end of the wash cycle. This reduces the amount of moisture left in the clothes, resulting in shorter drying times and energy saving.



#### The solution for wrinkle free clothes in no time

Achieve flawlessly smooth garments effortlessly with smartFinish. Perfect for clothes already clean and dry, but a little crumpled after being pulled out of a drawer. The smartFinish programme will significantly reduce the amount of creases in about 20 minutes and obtains the best results on cotton fabrics\*. Ready to be worn without any hassle.



Time saving programmes, a targeted stainRemoval feature, reduced ironing cycles, and the smart connection between the washer and dryer, simplify every aspect of doing laundry.

A new level of convenience.



#### A-rated - Our most energy-efficient washing

Siemens A-rated washing machines are highly energy-efficient, helping you save on utility bills and reduce your environmental impact.

Our machines are designed to consume up to -30% less energy compared to a standard Energy Efficiency Class A machine\* with a rating of up to A-30%.

This is achieved with the help of intelligent sensors and advanced technologies, that optimise water usage and detergent dosage for efficient and effective cleaning.

\*30% more efficient (35 kWh/100 cycles) than the limit value (51.4 kWh/100 cycles) of the energy efficiency class A according to EU-Regulation 2019/2014 (Retained EU Legislation).



The reload function allows the machine to be paused and the door opened, to add any extra item to the load at the next safe opportunity while a programme is running.



#### antiVibration

Having antiVibration technology built-in to the design of the machine makes the appliance more stable, which, in turn, makes it guieter.



#### powerSpeed 59 system

With the powerSpeed system, the laundry gets evenly soaked and heated up much faster and more consistently, for more thorough washing. Suited for up to 5kg of cottons or blended fabrics, the powerSpeed 59 result is achieved by a second pump that feeds the water into the drum at the beginning of the washing process. In parallel, the detergent is mixed with water and gets sprayed into the centre of the load, shortening the run time to only 59 minutes and increasing the wash performance.



#### rapid15 and rapid30

Need a clean shirt an hour before leaving the house?



The rapid15 and rapid30 washing programmes are the perfect solution. These innovative features wash, rinse and spin clothes in under an hour.



\*Suitable for cotton, linen and blended fabrics with high cottor

content (e.g. Jeans, business shirts). Limited performance on synthetic fabrics and blended fabrics with a high synthetic content. Not suitable for silk, wool, down, leather, membrane textiles

(e.g. Gore-Tex outdoor jackets). For these materials the treatment with steam is potentially harmful.

#### Outdoor

Specialised programme for washing waterproof clothing with membrane technology to protect the fabric and seams. For use with outdoor fabric detergent.



#### Outdoor/waterproof

This programme can be used to apply a waterproof treatment to breathable fabrics, prolonging the life of high-quality functional clothing like winter jackets, fleeces and ski wear.





#### **Drum interior light** The drum is lit after

switching on the appliance, after opening and closing the door, and after starting the programme for extra convenience. The light switches off automatically.






#### Less Ironing option

At the touch of a button, 'Less Ironing' can be added to a selected programme. This ensures the machine gently and evenly drains the water and reduces the spin speed, helping to keep creases to a minimum.



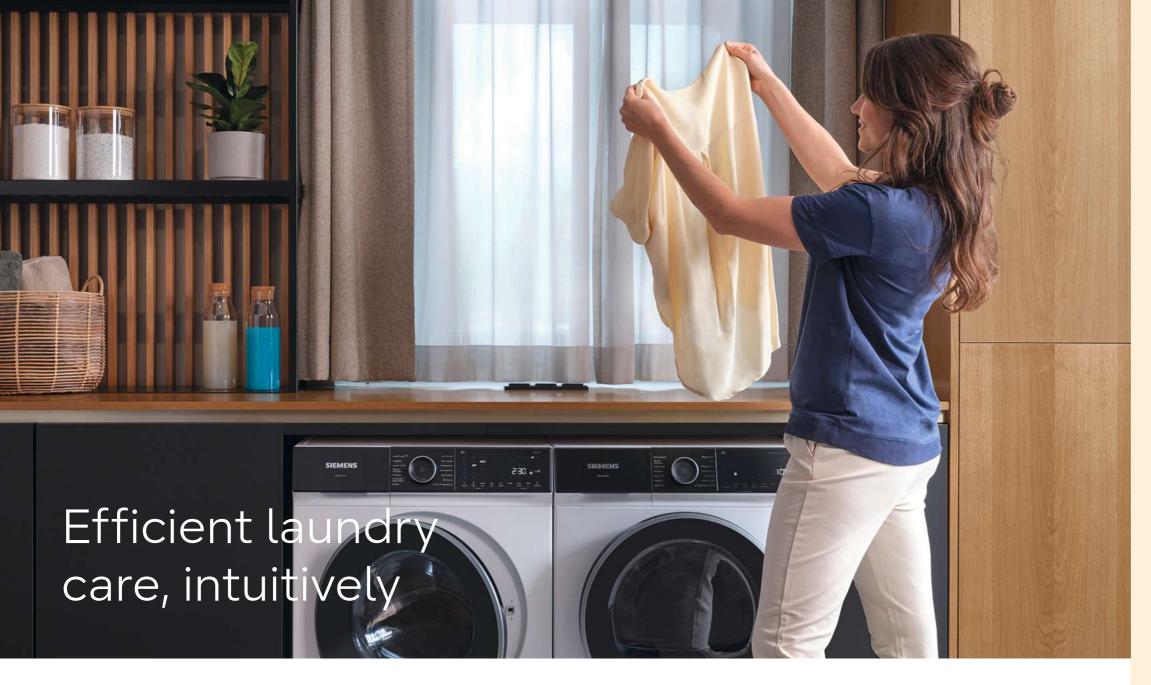

#### Siemens washing machines take the hassle out of laundry.

Take full advantage of the latest technology and innovation, designed to make laundry less of a chore.



#### Automatic programmes

Whether normal or delicate items – the automatic programme's 'Auto' function adjusts the entire wash cycle to suit various laundry needs for optimum effect. Perfect for hardwearing fabrics this mode will even add extra detergent if the washing is heavily soiled.



256

#### Get perfectly clean laundry in up to 65%\* less time with varioSpeed

Available on all our washing machines, this feature can automatically detect when time can be saved. The smart sensors identify load volume and type of textile, hence adapting the washing machine's process time efficiently to suit the specific load.

\*Difference between the duration of the Easy Care Programme 40°C and the duration of the Easy Care Programme 40°C in combination with the



#### Hygienically clean laundry – The Hygiene programme

The Hygiene programme is particularly suitable for people with allergies.




#### Meets the highest hygiene standards – The Drum Clean programme

An automatic alert after 20 washes notifies when to run the Drum Clean programme on a 90°C or 60°C wash which keeps the appliance clean and odour free.



#### Smoother clothes straight from the wash

Our Added steam option prevents freshly washed clothes coming out of the washing machine all crinkled up. It adds a gentle post-wash steam cycle that helps reduce wrinkles by up to 40%\*\* on both cotton t-shirts and cotton shirts, to help save time and reduce ironing.





#### Cut down on ironing with smartFinish

This programme helps reduce time spent on ironing by introducing a gentle dose of steam during the cycle to smooth away creases. With smartFinish, even badly creased items are significantly smoothed out within 20 minutes.



#### Mini load – The efficient option for small loads

Simply add Mini load to the chosen wash programme, and the washing machine will automatically adjust its setting and the amount of water needed. Perfect for single items, newly bought clothes or very small loads.



# Take a load off with Siemens Home Connect.

Siemens' smart washing machines, with Siemens Home Connect, have exciting features that provide more flexibility and choice when doing laundry.

#### Optimal dosing of detergent

i-Dos accurately dispenses detergent based on fabric type, water hardness and degree of soiling. With the detergent scan on the Siemens Home Appliances App, the intelligentDosing can even be further optimised. Simply scan the chosen detergent and fabric softener and the Siemens Home Appliances App will set up the ideal dosage settings perfectly, only using the exact amount of detergent needed, every time.

#### Match the laundry programme to specific needs

Use the Siemens Home Appliances App to guide programme selection. There is a description for each programme and an indication of its energy and water consumption, so the best decision can be made for specific laundry needs. The Siemens Home Appliances App also enables the washing machine and the dryer to work together. The dryer automatically chooses the right programme and the most suitable drying target based on the load washed in the washing machine.

#### nnected partners

With our connected partners – Amazon Alexa, Google Home and IFTTT – any living space can be turned into a fully connected home. Speak to appliances simply by asking Amazon Alexa or Google Home. With the IFTTT app, Siemens Home Connect appliances can be connected to a wider range of smart devices. Set up applets and digital commands to create bespoke solutions such as programming smart lights to flash when the laundry cycle ends.

For more information about Siemens Home Connect, visit Siemens Home UK: siemens-home.bsh-group.com/uk or Siemens Home IE: siemens-home.bsh-group.com/ie

Or scan the QR code to learn more about our smart laundry appliances.



textiles not treated



#### Clear display for easy selection.

All our models feature easy to use, intuitive LED displays to provide a full overview and make operation effortless.



Display shown: **WG56G2Z0GB** iQ500 washing machine



Display shown: **WG46H2A9GB** iQ500 washing machine



Display shown: **WG56B2A2GB** iQ700 washing machine

#### Just add laundry with i-Dos.



The i-Dos system automatically determines how much detergent is needed for each wash load, based on the weight of the laundry and programme used. Once the laundry is placed in the drum the intelligent washing machine will automatically determine the optimum allocation of detergent.

The built-in drawer conveniently holds enough liquid detergent for around 20 washes which removes the need to measure and fill the container for every wash. As the correct amount of liquid detergent is used every time, clothes will receive the perfect wash whilst saving time, water and detergent. This will result in hassle-free laundry and perfectly clean clothes. With the Siemens Home Appliances App, the detergent scan feature will even further adjust the dosing based on the detergent used.



#### Tough on stains, gentle on clothes.



With the stainRemoval system, tough stains can be removed effortlessly without the need for specialist products or pre-washing. After loading clothes in the machine, up to 16 stain treatments\* are available to select from.

Whether it is red wine or coffee, dirt or grass, blood or even cosmetics, our stainRemoval system automatically optimises the wash settings to remove individual stains from laundry. The system tailors the wash according to the nature of the stain, creating the perfect balance between the mechanical drum action, water level, wash time and temperature, saving you time, money on buying specialist products and removing the need for pre-washing.

\*16 stain treatments available on Home Connect models.







# Fast and efficient washing machines with added peace of mind.

\*Offer dates: 01.04.25 – 31.03.26. Online registration required. For full T&Cs and qualifying appliances visit

UK: siemens-home.bsh-group.com/uk/customer-service/ siemens-warranties

IE: siemens-home.bsh-group.com/ie/customer-service/warranty





#### High-performance and highly-efficient (tumble dryers only)

Be fascinated by the state-of-the-art technology of Siemens heat pump dryers. Heat pump dryers are condensation dryers equipped with a special heat pump technology. In contrast to classic condensation dryers, energy in the form of heat is not discharged into the environment; instead it is retained for the drying process.

Siemens heat pump dryers achieve impressive energy values and consume significantly less energy than condensation dryers. Our heat pump dryers can also be set up, like all condensation dryers, in multiple places within the home, since the condensed water is collected in a separate container integrated into the appliance. Alternatively, if preferred, the water can be drained out if plumbing allows.



#### ensor drying

All Siemens tumble dryers feature sensor drying, which provides uniform drying results, and makes over-drying a thing of the past. Sensors in the drum continually monitor the residual moisture in the laundry. They detect when the load has reached the selected drying level, and move the programme to the final cool-down period.



#### selfCleaning condenser (washer dryers and tumble dryers)

An automatic selfCleaning condenser is integrated into many Siemens laundry appliances helping to keep the condenser lint free. This sensor-controlled programme is intuitive and collects lint during each drying cycle. The result is a continually lint-free condenser that helps to keep energy consumption constantly low at all times. The fluff just needs to be removed from the lint filter after every cycle.



#### A lot less ironing

The Less Ironing option extends the anti-crease phase period at the end of the cycle by up to 120 minutes leading to fewer creases in laundry – so less time is spent ironing.



#### varioSpeed

This feature can automatically detect when time can be saved. The smart sensor identifies load volume and textile kind to adapt the tumble dryer's programme time efficiently to suit the specific load.



#### The rapid40 drying programme

With this programme, washing will be perfectly dry in only 40 minutes, thanks to optimised temperature control and a customised cool-down phase.



#### Wool or shoe drying basket

To further protect garments and materials during the drying process, Siemens iQ500 and iQ700 tumble dryers come with a drying basket. Warm air is then gently passed around the garments, rather than tumbling them.

With the latest technology built into our appliances, Siemens offers energy-efficient and stunning looking appliances for stylish kitchens and utility spaces.



#### Take the guess work out of drying

The Siemens Home Appliances App enables the washer and dryer to work together. The dryer automatically chooses the right programme and the most suitable drying target based on the load washed in the washing machine. intelligentDry guarantees precise drying results with maximum protection.







WZ28000 Stacking kit with pull-out shelf





Models shown: WR47B2C9GB (top) tumble dryer and WG56B2A2GB (bottom) washing machine



Wool drying basket



#### Stacking kits

Not only helping to stabilise the dryer on top of the washing machine, the shelf allows the easy loading and unloading of the dryer.

		WZ28000X with pull-out shelf	WZ28000 with pull-out shelf	WZ2750X with pull-out shelf	WZ2751X standard	WZ27500 with pull-out shelf	WZ227510 standard	WZ27400 with pull-out shelf	WZ27410 standard
		Silver inox	White	Silver inox	Silver inox	White	White	White	White
WR47B2CSGB	iQ 700	•							
WR47B2C9GB	iQ 700		-						
WQ46H2DXGB	iQ500			•					
WQ46H2D9GB	iQ500						-		
WQ45G200GB	iQ 500								



iQdrive® Motor

10

Year Warranty

State-of-the-art technology is at the heart of all Siemens tumble dryers.

\*Offer dates: 01.04.25 – 31.03.26. Online registration required. For full T&Cs and qualifying appliances visit

UK: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: siemens-home.bsh-group.com/ie/customer-service/warranty

# A breath of fresh air:

# Siemens washer dryers

Enjoy the luxury of complete laundry care without needing a lot of space.



#### varioSpeed

Get perfectly clean laundry in up to 65%\* less time. This feature can automatically detect when time can be saved. The smart sensor identifies load volume and type of textile, hence adapting the washing machine's process time efficiently to suit the specific load.



autoDry technology prevents overheating or uneven drying. Sensors precisely measure and control the temperature and moisture of laundry, preventing it from shrinking.



#### selfCleaning condenser (Washer Dryers and Tumble Dryer)

An automatic selfCleaning condenser is integrated into many Siemens laundry appliances helping to keep the condenser lint free. This sensor-controlled programme is intuitive and collects lint during each drying cycle. The result is a continually lint-free condenser that helps to keep energy consumption constantly low at all times. The fluff just needs to be removed from the lint filter after every cycle.

\*Difference between the duration of the Easy Care Programme 40°C and the duration of the Easy Care Programme 40°C in combination with the varioSpeed option.





Fast and efficient washer dryers with added peace of mind.

\*Offer dates: 01.04.25 - 31.03.26. Online registration required. For full T&Cs and qualifying appliances visit

UK: siemens-home.bsh-group.com/uk/customer-service/siemens-warranties IE: siemens-home.bsh-group.com/ie/customer-service/warranty





The i-Dos system automatically determines how much detergent is needed for each wash load, based on the weight of the laundry and programme used. Once the laundry is placed in the drum the intelligent washing machine will automatically determine the optimum allocation of detergent.

The built-in drawer conveniently holds enough liquid detergent for around 20 washes which removes the need to measure and fill the container for every wash. As the correct amount of liquid detergent is used every time, clothes will receive the perfect wash whilst saving time, water and detergent. Resulting in hassle-free laundry and perfectly clean



#### rapid15 and rapid30

Need a clean shirt an hour before leaving the house? The rapid15 and rapid30 washing programmes are the perfect solution. These innovative features wash, rinse and spin clothes in under an hour.





#### Wash&Dry60 and Wash&Drv45

With just one push of the button, the washer dryer perfectly washes and carefully dries up to 1kg of laundry in only 60 minutes on iQ500 WN54G1A1GB and even faster, in 45 minutes on iQ700 WN54C2ATGB. Perfect for when clothes need to be prepared quickly.





#### drying capacity This model provides ultimate convenience. Ideal for families to wash and dry in one go with a larger-thanaverage load capacity.

10.5kg washing and 6kg





smartFinish


The smartFinish programme uses gentle steam to reduce wrinkles, cutting down ironing time. Even badly wrinkled shirts and blouses are significantly smoothed







# Laundry appliance product overview

Freestanding washing machine and tumble dryer range

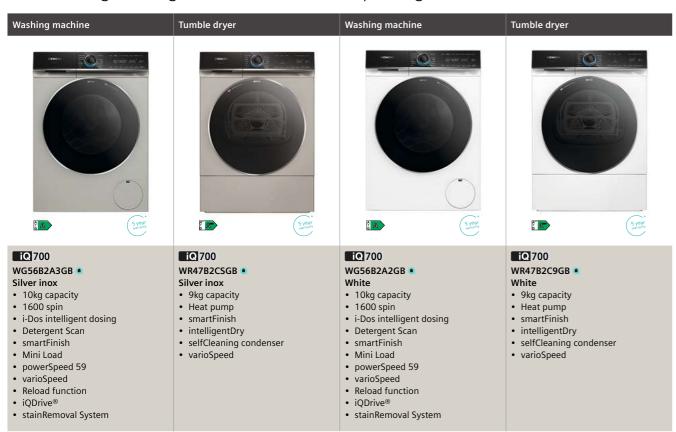



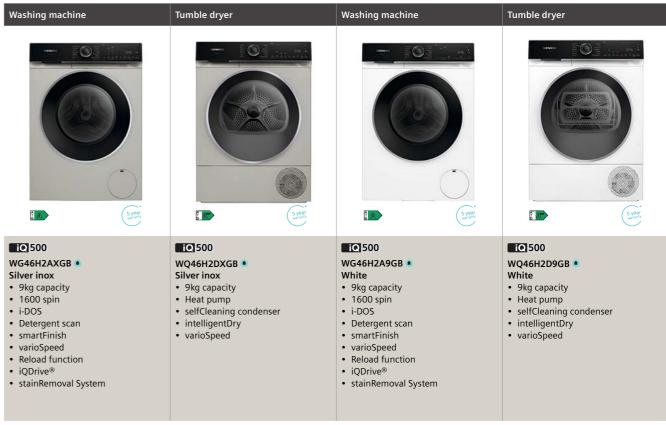

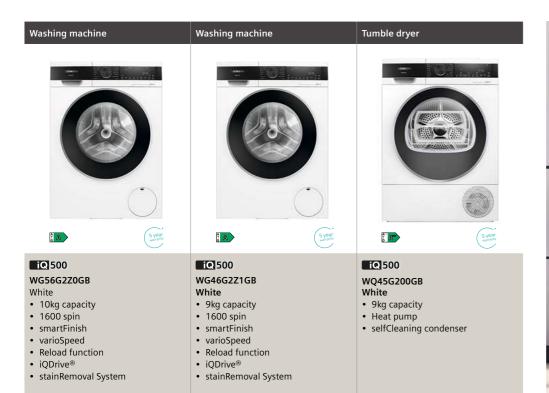



#### Freestanding washer dryer range



# Washing machines





#### **iQ** 700 WG56B2A3GB

Freestanding washing machine Silver inox 1600rpm spin speed







Freestanding washing machine

specifications

Appliance type	Freestanding washing machine
Design family	iQ 700
Model number	WG5682A3G8
Colour	Silver inox
	Silver Iriox
Key features	
smartFinish	
Detergent Scan	
Mini Load	
Home Connect	
i-Dos intelligent dosing system	
	<del>-</del>
powerSpeed 59'	
varioSpeed	
Reload function	
iQDrive®	
antiVibration design	
Consumption indicator	via APP
stainRemoval System	¥10 A11
Added Steam	_
Additional features	
Variable temperature / Variable spin	
Drum interior light	
Display	LED
_ · ·	LED
Control panel lock	
Delay start by (h)	24
Drum Clean programme	via APP
Water protection system	AquaStop
Standard programmes	1313 135550
Eco 40-60	
Cottons	_
Easy Care / Mixed	
Delicate/Silk / Wool	
Additional programmes / Functions	317027
Auto programme	
	(44)
Hygiene	via APP
Rapid 15' / Rapid 30'	_/_
Shirts	via APP
Outdoor / Outdoor (waterproofing)	-1
Dark Wash/Easy Care Plus	via APP
Lingerie / Towels	-1-
<del>-</del>	
Curtains / Duvet	-1-
Rinse / Spin / Drain	■1■1=
Spin/Drain	
Prewash	
Extra Rinse / Rinse hold	-1
Water Plus	
Reduced ironing / Reduced noise	-1-
Memory programmes	
Performance	
Energy efficiency class <sup>1</sup>	A
	G A
Load capacity (kg)	1-10
Energy <sup>2</sup> / Water <sup>3</sup> (kWh / litres)	35 / 48
Programme duration <sup>4</sup> (h:mm)	3:57
-	
Maximum spin speed (rpm) <sup>5</sup>	1600
Spin efficiency class	A
Noise level (dB [A] re 1pW)	72
Noise emission class	A
Duration of Quick Wash programme (minutes)	15/30
Technical information	10000
	949 v 509 v 500 (636)
Dimensions: H x W x D (inc. door porthole) (mm)	848 x 598 x 590 (636)
Door opening angle	188°
Depth with door open 90° (mm)	1090
Height adjustable by (mm)	12
Length of supply / drain hose (mm)	1500 / 1420
	10.000 (0.000)
Length of mains cable (mm)	2100
Door hinge	Left-hand
Drum type	waveDrum

■ Yes, model has this feature. — Feature not available for this model. <sup>1</sup> On an energy-efficiency class scale from A to G. <sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco 40-60 programme). <sup>3</sup> Water consumption in litres/operating cycle (using Eco 40-60 programme). <sup>4</sup> Duration of Eco 40-60 programme. <sup>5</sup> The specified value is rounded. Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required

















Freestanding washing machine

specifications









	F	0.0		no I	
1	4	All la			
a		ð	30		
1	6		9		
	•		4		

Appliance type			Freestanding washing machine	es	
Design family	iQ 700	iQ500	iQ 500	iQ 500	iQ 500
Model number	WG56B2A2GB	WG46H2AXGB	WG46H2A9GB	WG56G2Z0GB	WG46G2Z1GB
Colour	White	Silver inox	White	White	White
Key features					
martFinish			•		
Detergent Scan				_	_
Mini Load				_	_
Home Connect	•			_	_
-Dos intelligent dosing system	•			_	_
powerSpeed 59'	•	_	_	_	_
varioSpeed	•				
Reload function	•				
QDrive®	•				
antiVibration design		<u> </u>	<u> </u>	<u> </u>	_
Consumption indicator	via APP	via APP	via APP		
stainRemoval System	•				•
Added Steam	_	<u> </u>	_		
Additional features	_	_	_		
ariable temperature / Variable spin	■/■	■/■	■/■	■/■	■/■
rum interior light					= -/-
isplay	LED	LED	LED	LED	LED
ontrol panel lock	<b>■</b>	<b>I</b>	<b>■</b>	<b>■</b>	
Pelay start by (h)	24	24	24	24	24
Orum Clean programme	via APP				
Vater protection system	AquaStop	AquaStop	AquaStop	Multiple water protection	Multiple water protection
Standard programmes	riquistop	Adacstop	/ iquasiop	manaple water protection	maniple water protection
co 40-60		•			
Cottons	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>
asy Care / Mixed		<u> </u>			
Delicate/Silk / Wool	 ■/■	= / = = / =	<b>B</b> / <b>B</b>	<b>=</b> /=	<b>=</b> / <b>=</b>
Additional programmes / Functions	= / =		=/=		=/=
Auto programme				_	_
lygiene	via APP	•	•		
lapid 15' / Rapid 30'	■/■	<u> </u>	<b>=</b> / <b>=</b>	<b>=</b> / <b>=</b>	
· · · · · · · · · · · · · · · · · · ·					
hirts	via APP	via APP	via APP		
	via APP	via APP	via APP	<b>■</b>	<b>=</b>
Outdoor / Outdoor (waterproofing)	-1	-1	-1	■ ■/-	■ ■1-
Outdoor / Outdoor (waterproofing) Oark Wash/Easy Care Plus	− / ■ via APP	– / ■ via APP	− / ■ via APP	■1- -	■ I - -
Outdoor / Outdoor (waterproofing) Oark Wash/Easy Care Plus ingerie / Towels	– / ■ via APP – / –	– / ■ via APP – / –	– / <b>■</b> via APP – / –	■1- - -1-	■1- - -1-
Outdoor / Outdoor (waterproofing) Oark Wash/Easy Care Plus ingerie / Towels Curtains / Duvet	- / ■ via APP - / - - / -	- / ■ via APP - / - - / -	- / ■ via APP - / -	■1- - -1- -1-	
Outdoor / Outdoor (waterproofing) Oark Wash/Easy Care Plus ingerie / Towels Curtains / Duvet tinse / Spin / Drain	- / ■ via APP - / - - / - ■ / ■ / -	- / ■ via APP - / - - / - ■ / - / -	- / ■ via APP - / - - / -	■1- - -1- -1- ■1-1-	
Outdoor / Outdoor (waterproofing)  Dark WashlEasy Care Plus  ingerie / Towels  Curtains / Duvet  inse / Spin / Drain  pin/Drain	- / ■ via APP - / / / - ■ / ■ / -	- / ■ via APP - / - - / - ■ / - / -	- / ■ via APP - / / / / - ■ / - / -	■1- - -1- -1- ■1-1-	
Cutdoor / Outdoor (waterproofing)  Dutdoor / Outdoor (waterproofing)  Dark Wash/Easy Care Plus  Ingerie / Towels  Curtains / Duvet  Rinse / Spin / Drain  Prewash  Prewash	- / ■ via APP - / / / / -	- / ■ via APP - / - - / - ■ / - / -	- / ■ via APP - / / / / -		
Outdoor / Outdoor (waterproofing)  Nark Wash/Easy Care Plus  Ingerie / Towels  Curtains / Duvet  Ininse / Spin / Drain  Ipin/Drain  Irewash  Extra Rinse / Rinse hold	- / II via APP - / / / / / / / / / / / -	- / ■  via APP  - / -  - / -  - / -  - / -	- / ■ via APP - / / / / / / -		
Outdoor / Outdoor (waterproofing)  Dark Wash/Easy Care Plus  ingerie / Towels  Lurtains / Duvet  tinse / Spin / Drain  pin/Drain  rewash  Extra Rinse / Rinse hold  Nater Plus	- /	- / ■ via APP - / / / - ■ / - / - ■ / - / / ■	- / III via APP - / / / / / / II - / II		-   -   -   -   -     -     -     -     -     -     -       -
outdoor / Outdoor (waterproofing) lark Wash/Easy Care Plus ingerie / Towels urtains / Duvet inse / Spin / Drain pin/Drain rewash ktra Rinse / Rinse hold //ater Plus educed ironing / Reduced noise	- / III via APP - / / / / / / / / / / -	- / ■  via APP  - / -  - / -  - / -  - / -	- / ■ via APP - / / / / / / -		
Outdoor / Outdoor (waterproofing)  Dark Wash/Easy Care Plus ingerie / Towels  Curtains / Duvet  Ininse / Spin / Drain  pin/Drain  rewash  Xtra Rinse / Rinse hold  Vater Plus  deduced ironing / Reduced noise  Memory programmes	- /	- /  via APP - / / / / / / / / / -	- / III via APP - / / / / / / III - / / -		-   -   -   -   -   -   -   -   -
outdoor / Outdoor (waterproofing) lark Wash/Easy Care Plus ingerie / Towels urtains / Duvet urtains / Duvet urtains / Drain pin/Drain rewash xtra Rinse / Rinse hold //dater Plus educed ironing / Reduced noise femory programmes erformance	- / III via APP - / / / / / / / / / / / / -	- / ■  via APP  - / -  - / -  - / -  - / -  - / -  - / -  - / -  - / -  - / -	- /  via APP - / / / / / / / / / / / -	-   -   -   -   -   -   -   -   -	-   -   -   -   -   -   -   -   -
Outdoor / Outdoor (waterproofing)  Dark Wash/Easy Care Plus  Ingerie / Towels  Curtains / Duvet  Inine / Spin / Drain  Spin/Drain  Prewash  Axtra Rinse / Rinse hold  Water Plus  Ided of ining / Reduced noise  Memory programmes  Verformance	- / III via APP - / / / / / / / / / / -	- /  via APP - / / / / / / / / / -	- / III via APP - / / / / / / III - / / -		-   -   -   -   -   -   -   -   -
Outdoor / Outdoor (waterproofing)  Dark WashlEasy Care Plus  ingerie / Towels  Curtains / Duvet  inse / Spin / Drain  pin/Drain	- / III via APP - / / / / / / / / / / / / -	- / ■  via APP  - / -  - / -  - / -  - / -  - / -  - / -  - / -  - / -  - / -	- /  via APP - / / / / / / / / / / / -	-   -   -   -   -   -   -   -   -	-   -   -   -   -   -   -   -   -
Outdoor / Outdoor (waterproofing)  Dark WashlEasy Care Plus  Lingerie / Towels  Lurtains / Duvet  Linse / Spin / Drain  Lipin/Drain  Li	- / II via APP - / I - /	- / ■  via APP  - / -  - / -  - / -  ■ / - / -  - / -  - / -  - / -  - / -  - / -  - / -  - / -  - / -  - / -  - / -	- / ■ via APP - /		
Outdoor / Outdoor (waterproofing)  Dark Wash/Easy Care Plus  Ingerie / Towels  Curtains / Duvet  Ininse / Spin / Drain  pin/Drain  rewash  Xtra Rinse / Rinse hold  Water Plus  Educed ironing / Reduced noise  demory programmes  lefformance  nergy efficiency class¹  oad capacity (kg)  nergy² / Water³ (kWh / litres)	- /	-/■ via APP -///- ■/-/- ■/-/////-	- / ■ via APP - /		
outdoor / Outdoor (waterproofing) lark Wash/Easy Care Plus ingerie / Towels urtains / Duvet inse / Spin / Drain pin/Drain rewash xtra Rinse / Rinse hold vater Plus educed ironing / Reduced noise demory programmes erformance nergy efficiency class¹ oad capacity (kg) nergy² / Water² (kWh / litres) rogramme duration⁴ (h:mm)	- / II  via APP  - / -	-/■ via APP -/////////	- /  via APP - / -	-   -   -   -   -   -   -   -   -	
outdoor / Outdoor (waterproofing) lark Wash/Easy Care Plus ingerie / Towels urtains / Duvet inse / Spin / Drain pin/Drain rewash xtra Rinse / Rinse hold later Plus educed ironing / Reduced noise demory programmes erformance energy efficiency class¹ ooad capacity (kg) nergy³ / Water³ (kWh / litres) rogramme duration⁴ (h:mm) laximum spin speed (rpm)⁵	- / II  via APP  - / -	-/■ via APP -///- ■/-/- ■/-/- ■ -///	-/ II via APP -/////////	-   -   -	-   -   -   -   -   -   -   -   -
utdoor / Outdoor (waterproofing) ark Wash/Easy Care Plus ngerie / Towels urtains / Duvet inse / Spin / Drain pin/Drain rewash ktra Rinse / Rinse hold later Plus deduced ironing / Reduced noise demory programmes erformance nergy efficiency class¹ boad capacity (kg) nergy² / Water² (kWh / litres) roogramme durations (h:mm) laximum spin speed (rpm)³ pin efficiency class	- / I via APP - /	- / ■  via APP  - / -  - / -  - / -  - / -  - / -  - / -  - / -   - / -   - 1 -   1 - 9  49 / 50  3:40  1600	- / II  via APP  - / -  - / -  - / -  - / -  - / -  - / -  - / II   - / II  - /		
outdoor / Outdoor (waterproofing) lark Wash/Easy Care Plus ingerie / Towels urtains / Duvet inse / Spin / Drain pin/Drain rewash ktra Rinse / Rinse hold //dater Plus deduced ironing / Reduced noise demory programmes erformance nergy efficiency class¹ ood capacity (kg) nergy² / Water² (kWh / litres) rogramme duration⁴ (h.mm) / daximum spin speed (rpm)³ pin efficiency class loise level (dB [A] re 1pW)	-/■ via APP -/////////	-/■ via APP -///- ■/-/- ■/-/////-	-/■ via APP -////- ■/-/- ■/-////-	■   - -   - -   - -   - -   - ■   - -   - ■   - -   - 1   - -   - 1   - -   - 1   - -   - 1   - -   - 1   - -   - -	I /
outdoor / Outdoor (waterproofing) lark Wash/Easy Care Plus ingerie / Towels urtains / Duvet urtains / Duvet inse / Spin / Drain pin/Drain rewash ktra Rinse / Rinse hold //ater Plus educed ironing / Reduced noise demory programmes erformance nergy efficiency class¹ ood capacity (kg) nergy² / Water³ (kWh / litres) rogramme duration⁴ (h:mm) //aximum spin speed (rpm)⁵ pin efficiency class loise level (dB [A] re 1pW) loise emission class	- / II  via APP  - / -	-/■ via APP -///-	- / ■ via APP - /		1-9 49/50 3:40 1600 A 74
outdoor / Outdoor (waterproofing) lark Wash/Easy Care Plus ingerie / Towels  urtains / Duvet  inse / Spin / Drain  pin/Drain  rewash  xtra Rinse / Rinse hold  //ater Plus  educed ironing / Reduced noise  demory programmes  erformance  nergy efficiency class¹  oad capacity (kg)  nergy² / Water³ (kWh / litres)  rogramme duration⁴ (h:mm)  laximum spin speed (rpm)³  pin efficiency class  loise level (dB [A] re 1 pW)  loise emission class  uration of Quick Wash programme (minutes)	- / I via APP - /	-/■ via APP -////- ■/-/- ■/-/- ■/-//	- / ■ via APP - /		I /
Outdoor / Outdoor (waterproofing)  Dark Wash/Easy Care Plus Ingerie / Towels  Lurtains / Duvet Lurtains / Duvet Lurtains / Drain  Join/Drain  Trewash  Axtra Rinse / Rinse hold  Vater Plus  Leduced ironing / Reduced noise  Alemory programmes  Lerformance  Terformance  Terformance  Tergy efficiency class¹  Load capacity (kg)  The company / Water / (kWh / litres)  Trogramme duration¹ (h.mm)  Anximum spin speed (rpm)³  Pin efficiency class  Loise level (dB [A] re 1pW)  Loise emission class  Loise level colss  Loise emission class  Loise level of Oukck Wash programme (minutes)  echnical information	- / I via APP - /	-/■ via APP -////- ■/-/- ■/-/- ■/-//	- / ■ via APP - /		
Outdoor / Outdoor (waterproofing)  Dark Wash/Easy Care Plus  Ingerie / Towels  Curtains / Duvet  Inines / Spin / Drain  pin/Drain  rewash  Xtra Rinse / Rinse hold  Vater Plus  deduced ironing / Reduced noise  Memory programmes  rerformance  nergy efficiency class¹  ood capacity (kg)  nergy² / Water² (kWh / litres)  rogramme duration⁴ (h:mm)  Alaximum spin speed (rpm)³  pin efficiency class  loise level (dB [A] re 1pW)  loise emission class  verthical information  limensions: H x W x D (inc. door porthole) (mm)	- / ■ via APP - /	-/■ via APP -/////////	-/■ via APP -////- ■/-/////	-   -   -   -   -   -   -   -   -	I /
outdoor / Outdoor (waterproofing) lark Wash/Easy Care Plus ingerie / Towels urtains / Duvet inse / Spin / Drain pin/Drain rewash ktra Rinse / Rinse hold later Plus later Plus leduced ironing / Reduced noise demory programmes erformance nergy efficiency class¹ load capacity (kg) nergy² / Water² (kWh / litres) rogramme duration⁴ (h-mm) lakimum spin speed (rpm)³ pin efficiency class loise level (dB [A] re 1pW) loise emission class louration of Quick Wash programme (minutes) eechnical information imensions: H x W x D (inc. door porthole) (mm) loor opening angle	- / ■ via APP - /	-/■ via APP -////- ■/-/- ■/-////-	- / ■ via APP - /	■ /	I /
Outdoor / Outdoor (waterproofing)  Dark Wash/Easy Care Plus  Ingerie / Towels  Curtains / Duvet  Ininse / Spin / Drain  pin/Drain  pin/Drain  rewash  Xtra Rinse / Rinse hold  Water Plus  deduced ironing / Reduced noise  demory programmes  verformance  nergy efficiency class¹  coad capacity (kg)  nergy² / Water³ (kWh / litres)  roogramme duration⁴ (h:mm)  Maximum spin speed (rpm)⁵  pin efficiency class  loise level (dB [A] re 1pW)  loise emission class  puration of Quick Wash programme (minutes)  echnical information  pinnensions: H x W x D (inc. door porthole) (mm)  poor opening angle  levelth with door open 90° (mm)	- / II  via APP  - / -	-/■ via APP -////- ■/-/- ■/-/- ■/-/-  -//-	- / ■ via APP - / / / / / / / / / /	■ / -  -	1-9 49/50 3:40 1600 A 74 B 15/30 845 x 598 x 590 (636) 165° 107.3
outdoor / Outdoor (waterproofing) lark Wash/Easy Care Plus ingerie / Towels  urtains / Duvet  inse / Spin / Drain  pin/Drain  rewash  ktra Rinse / Rinse hold  //ater Plus  educed ironing / Reduced noise  demory programmes  erformance  nergy efficiency class¹  ood capacity (kg)  nergy² / Water³ (kWh / litres)  rogramme duration⁴ (h.mm)  //akarimum spin speed (rpm)²  pin efficiency class  loise level (dB [A] re 1pW)  loise emission class  uration of Quick Wash programme (minutes)  echnical information  intensions: H x W x D (inc. door porthole) (mm)  toor opening angle  epeth with door open 90° (mm)  leight adjustable by (mm)	- / ■ via APP - /	-/■ via APP -////- ■/-/- ■/-/- ■/-//	- / ■ via APP - /		1 - 9 49 / 50 3:40 1600 A 74 B 15/30 845 x 598 x 590 (636)
Outdoor / Outdoor (waterproofing)  Dark Wash/Easy Care Plus Ingerie / Towels  Lurtains / Duvet Lurtains / Duvet Lurtains / Drain  Join/Drain  Join/Dra	- / ■ via APP - /	-/■ via APP -/////////	- / ■ via APP - / / / / / / / / / /	-   -   -   -   -   -   -   -   -	
Outdoor / Outdoor (waterproofing)  Dark Wash/Easy Care Plus  Ingerie / Towels  Curtains / Duvet  Inines / Spin / Drain  Ipin/Drain  Ipin/Drain  Irewash  Axtra Rinse / Rinse hold  Water Plus  Ideduced ironing / Reduced noise  Memory programmes  Verformance  Inergy efficiency class¹  Load capacity (kg)	- / ■ via APP - / -   - / -	-/■ via APP -////- ■/-/- ■/-/-  -///	- / ■ via APP - /	■ /	-   -   -   -   -   -   -   -   -

Yes, model has this feature. - Feature not available for this model.

<sup>&</sup>lt;sup>1</sup> On an energy-efficiency class scale from A to G. <sup>2</sup> Energy consumption in kWh/100 operating cycles (using Eco 40-60 programme). <sup>3</sup> Water consumption in litres/operating cycle (using Eco 40-60 programme). <sup>4</sup> Duration of Eco 40-60 programme. <sup>5</sup> The specified value is rounded.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

# Tumble dryers





#### iQ 700 WR47B2CSGB

Freestanding tumble dryer Silver inox



Not final image, subject to change.









Freestanding tumble dryer specifications

Available October 2025 Not final image, subject to change.

Appliance type	Freestanding tumble dryer
Design family	iQ 700
Model number	WR47B2CSGB
Colour	Silver inox
Key features	
Home Connect	
Heat pump	
smartFinish	
intelligentDry	
selfCleaning condenser	
antiVibration design	
varioSpeed	
Additional features	
Sensor drying	
	LED
Display	120 0000
Anti-crease cycle (mins)	120
Time delay / Time Remaining	
Drum interior light	120,00000
Water container full / Blocked filter warning indicator	■ j ■
Control panel lock	
Programmes / Functions	
Cotton / Cottons Eco	
Easy Care	
Mixed Fabrics	
Allergy Plus/Hygiene	
Lingerie	Via APP
Wool Finish	128
Wool in drying basket (model includes drying basket)	
Towels	14
Rapid 40 min	
Jeans	
Shirts	
Bed Linen	
Down Wear	
Duvet	
Pillows	5-3
Outdoor	3603
Time programme cold	
Time programme warm	
Reduced ironing	<b>-</b>
Memory programme	
Performance	
Energy efficiency class	ATT ATT
Capacity cotton (kg)	9
Condensation efficiency class	A
Condensation efficiency for standard cotton programme –	Refer to website for details
Full and partial load	Refer to website for details
Noise level (dB [A] re 1pW)	59
Technical information	
Dimensions: H x W x D (inc. door porthole) (mm)	842 x 598 x 627 (675)
Door opening angle	170°
Depth with door open 90° (mm)	1119
Height adjustable by (mm)	
Length of mains cable (mm)	15
	145
Door hinge	Reversible
Can be used with drain set	
Drain set included	
Cycle time Cotton, Full Load (Label) (min / cycle)	Refer to website for details
Compressor Type	Twin Rotary
Drum volume (litres)	112
Optional accessories for tumble dryers	
,	
Cover plate	WZ20290
	WZ20290 -

■ Yes, model has this feature.

The programme cotton cupboard dry used at full and partial loads is the standard drying programme to which the information on the energy label refers. This is the most efficient programme in terms of energy consumption for cotton. Annual consumption is based on 160 drying cycles.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

















Freestanding tumble dryer specifications

Not final image, subject to change.

Available July 2025	

Appliance type			tumble dryers	
Design family	iQ 700	iQ 500	iQ 500	iQ 500
Model number	WR47B2C9GB	WQ46H2DXGB	WQ46H2D9GB	WQ45G200GB
Colour	White	Silver inox	White	White
Key features				
Home Connect				-
Heat pump				
smartFinish		_	_	_
intelligentDry	•			
		<b>-</b>	-	
selfCleaning condenser		<del>-</del>	_	
antiVibration design				
varioSpeed		•	•	-
Additional features		1		
Sensor drying		•	•	•
Display	LED	LED	LED	LED
Anti-crease cycle (mins)	120	120	120	120
Time delay / Time Remaining		•	•	•
Drum interior light	-	_		
	100			
Water container full / Blocked filter warning indicator	<b>=</b> / <b>=</b>	■1■	■/■	■ / ■
Control panel lock	•	•	•	
Programmes / Functions				
Cotton / Cottons Eco	■ / ■	<b>I</b>	■/■	<b>■</b> / <b>■</b>
Easy Care	•	•	•	
Mixed Fabrics				
Allergy Plus/Hygiene				
Lingerie	Via APP	_	<u> </u>	<u> </u>
	-		<u>-</u>	-
Wool Finish				
Wool in drying basket (model includes drying basket)	•	-	-	
Towels	•	•	•	
Rapid 40 min			•	
Jeans	-	-	-	-
Shirts		•	•	
Bed Linen				
Down Wear	_	_	_	_
Duvet	_	_	_	_
Pillows	_	_	_	
Outdoor				<del></del>
	-			
Time programme cold	_	_	_	<u> </u>
Time programme warm	•	•	•	
Reduced ironing	•	-	-	-
Memory programme	•			-
Performance				
Energy efficiency class	ATT ATT	A***	A***	A***
	1,000			
Capacity cotton (kg)	9	9	9	9
Condensation efficiency class	Α	Refer to website for details	Refer to website for details	В
Condensation efficiency for standard cotton programme – Full and partial load	Refer to website for details	Refer to website for details	Refer to website for details	88%
Noise level (dB [A] re 1pW)	59	59	59	61
Technical information				
Dimensions: H x W x D (inc. door porthole) (mm)	842 x 598 x 627 (675)	842 x 598 x 613 (648)	842 x 598 x 613 (648)	842 x 598 x 613 (64
Door opening angle	170°	165°	165°	170°
Depth with door open 90° (mm)	1119	1096	1096	1096
Height adjustable by (mm)	15	15	15	15
Length of mains cable (mm)	1450	1800	1800	1795
Door hinge	Reversible	Right-hand	Right-hand	Right-hand
Can be used with drain set				
Drain set included				
Cycle time Cotton, Full Load (Label) (min / cycle)	Refer to website for details	Refer to website for details	Refer to website for details	155 min
Compressor Type	Twin Rotary	Twin Rotary	Twin Rotary	Speed
Drum volume (litres)	112	112	112	112
	- 15	-12	. 12	
Optional accessories for tumble dryers	W720200	W720200	W720200	W720200
	WZ20290	WZ20290 WZ2751X	WZ20290 WZ27510	WZ20290 WZ27410

The programme cotton cupboard dry used at full and partial loads is the standard drying programme to which the information on the energy label refers. This is the most efficient programme in terms of energy consumption for cotton. Annual consumption is based on 160 drying cycles.

Data valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

# Washer dryers





#### 1Q 700 WN54C2ATGB

Freestanding washer dryer Silver 1400rpm spin speed















#### Freestanding washer dryer specifications

Appliance type	Freestanding washer dryer
Design family	iQ 700
Model number	WN54C2ATGB
Colour	Silver
Key features	
i-Dos intelligent dosing system	
Detergent scan	
Home Connect	<u> </u>
iQDrive®	
varioSpeed	1 1
Reload facility	
autoDry function	
selfCleaning Condenser	2 5
Additional features	
Time delay/Time remaining	
Control panel lock	
Water protection system	AquaStop
Programmes	
smartFinish	
Hygiene	
rapid15'	
Wash & Dry 60 mins	Wash & Dry 45°
Cottons	
Easy-care programme	
Wool programme	
Delicates/Silk	
Intensive Dry	
Gentle Dry	
myTime Wash & Dry	
myTime Dry	
Rinse	
Spin/Drain	
Memory	
Drum Clean	
Outdoor (Waterproofing)	-
Shirts	-
Mixed Fabrics	-
Reduced noise wash/dry	
Reduced Ironing	
Extra Rinse	
Water level increase option	722
Pre wash	2-2
Variable Temperature/Spin	
Performance/technical information	HH
	A
Energy efficiency class washing and drying <sup>1</sup>	Î D
Energy efficiency class washing <sup>2</sup>	ĝ A
Energy 3 / Waters washing and de in = // Alth	The second secon
Energy <sup>3</sup> / Water <sup>4</sup> washing and drying (kWh / litres)	305 / 75
Energy <sup>5</sup> / Water <sup>6</sup> washing (kWh / litres)	52/50
Load capacity washing and drying / washing (kg)	1-6/1-10.5
Programme duration? washing and drying / washing (h:mm)	8:20 / 4:00
Spin efficiency class	B
Spin speed* (rpm)	1400
Noise level (dB [A] re 1pW)	70
Noise emission class	A
Dimensions: H x W x D (inc. door porthole) (mm)	848 x 598 x 622 (645)
Door opening angle	125°
Depth with door open 90° (mm)	1142
Height adjustable by (mm)	12
Length of supply / drain hose (mm)	1500 / 1500
Length of mains cable (mm)	2100
Door hinge	Left-hand
	waya Drum
Drum type	waveDrum

- Yes, model has this feature. Feature not available for this model.
- 1.2 On an energy-efficiency class scale from A to G.
  3 Energy consumption in kWh1100 complete operating cycles (using Eco 40-60 programme).
  4 Water consumption in litres/complete operating cycle (using Eco 40-60 programme).
  5 Energy consumption in kWh1100 wash cycles (using Eco 40-60 programme).
  6 Water consumption in litres/wash cycle (using Eco 40-60 programme).
  7 Duration of Eco 40-60 programme, complete operating cycle / wash cycle.
  8 The specified value is rounded.

- \* The specimen variet is rounded.

  \*Data valid in this table as of April 2025. Subject to modification without prior notice.

  \*5 year warranty Offer dates: 01.04.25 31.03.26. T&C's apply. Online registration required.





#### Freestanding washer dryer specifications

Appliance type Design family	Freestanding washer dryer iQ 500
Model number	WN54G1A1GB
Colour	
	White
Key features	_
i-Dos intelligent dosing system	-
Detergent scan	-
Home Connect	-
iQDrive®	
varioSpeed	
Reload facility	
autoDry function	
selfCleaning Condenser	
Additional features	
Time delay/Time remaining	
Control panel lock	
Water protection system	Multiple water protection
Programmes	
smartFinish	
Hygiene	
rapid15'	-
Wash & Dry 60 mins	-
Cottons	<u> </u>
	<b>-</b>
Easy-care programme	
Wool programme	<u> </u>
Delicates/Silk	•
Intensive Dry	•
Gentle Dry	
myTime Wash & Dry	-
myTime Dry	-
Rinse	
Spin/Drain	
Memory	-
Drum Clean	-
Outdoor (Waterproofing)	
Shirts	-
Mixed Fabrics	
Reduced noise wash/dry	-
Reduced Ironing	
Extra Rinse	_
Water level increase option	_
Pre wash	-
Variable Temperature/Spin	_
Performance/technical information	_
	A
Energy efficiency class washing and drying <sup>1</sup>	Î D
Energy efficiency class washing <sup>2</sup>	A
Energy <sup>3</sup> / Water <sup>4</sup> washing and drying (kWh / litres)	306/82
	51 / 52
Energys / Waters washing (kWh / litres)	
Load capacity washing and drying / washing (kg)	1-6 / 1-10.5
Programme duration <sup>7</sup> washing and drying / washing (h:mm)	8:40 / 3:59
Spin efficiency class	В
Spin speed® (rpm)	1400
Noise level (dB [A] re 1pW)	70
Noise emission class	A
Dimensions: H x W x D (inc. door porthole) (mm)	848 x 598 x 590 (635)
Door opening angle	165°
Depth with door open 90° (mm)	1072
Height adjustable by (mm)	12
Length of supply / drain hose (mm)	1500 / 1500
Length of mains cable (mm)	2100
Door hinge	Left-hand
Drum type	waveDrum

<sup>■</sup> Yes, model has this feature. - Feature not available for this model.

<sup>1.2</sup> On an energy-efficiency class scale from A to G.

3 Energy consumption in kWh/100 complete operating cycles (using Eco 40-60 programme).

4 Water consumption in litres/complete operating cycle (using Eco 40-60 programme).

5 Energy consumption in kWh/100 wash cycles (using Eco 40-60 programme).

6 Water consumption in litres/wash cycle (using Eco 40-60 programme).

7 Duration of Eco 40-60 programme, complete operating cycle / wash cycle.

8 The specified value is rounded.

Pata valid in this table as of April 2025. Subject to modification without prior notice.

\*5 year warranty - Offer dates: 01.04.25 – 31.03.26. T&C's apply. Online registration required.

# Notes

Models shown on front left to right: LC87KFN60B angled chimney hood and EX851HVC1E flexInduction hob.

Siemens, a division of BSH Home Appliances Ltd, Grand Union House, Old Wolverton Road, Wolverton, Milton Keynes, MK12 5PT Tel: 0344 892 9040

siemens-home.bsh-group.com/uk

Showroom Siemens London, Home of studioLine, 14 Wigmore Street, London, W1U 2RE Tel: 0330 134 3100

Email: SiemensLondon@Siemens-Home.BSH-Group.com

BSH Home Appliances Ltd, M50 Business Park, Ballymount, Dublin 12

Tel: 1890 626041

siemens-home.bsh-group.com/ie

#### Disclaimer

This brochure is current as from the publication date and supersedes all previous brochures for these products. Whilst BSH Home Appliances Ltd believes that all information contained within this brochure is correct at the time of going to print, no representation or warranty, express or implied, is or will be made and no responsibility or liability is or will be accepted by BSH Home Appliances Ltd in relation to the accuracy or completeness of this information and any liability is expressly disclaimed. To the extent permitted by law, BSH Home Appliances Ltd expressly excludes: i) all conditions, warranties and other terms which might otherwise be implied by statute, common law or the law of equity and ii) any liability for any direct, indirect or consequential loss or damage (including, without limitation, damages for loss of business or loss of profits) arising in contract, tort or otherwise from the use of or reliance on any information contained within this brochure or from any action or decision taken as a result of such use or reliance. BSH Home Appliances Ltd reserves the right to modify technical data and all other information contained within this brochure without notice. All rights reserved.

No part of this publication may be reproduced in any form or without the prior written permission of BSH Home Appliances Ltd.

This brochure should not be regarded as an infallible guide nor as an offer of sale for a particular product.

Due to variables in the reproduction process, colours of actual products may vary slightly from those depicted. We recommend a visit to a Siemens dealer to confirm that specifications and colours are to your satisfaction.

Valid from April 2025 SIEMBIFS2025

